





输送链

CONVEYOR CHAINS

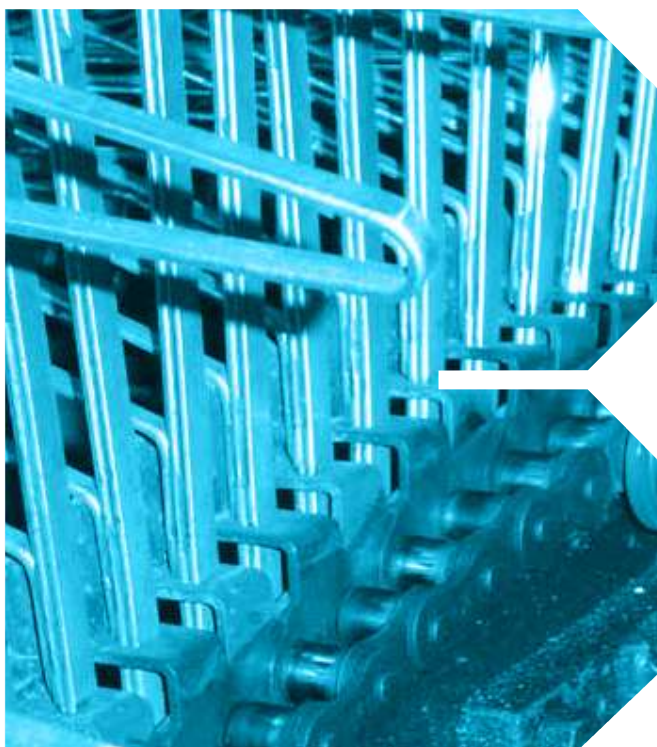

A系列直链板滚子链

Roller chains with straight side plates (A series)

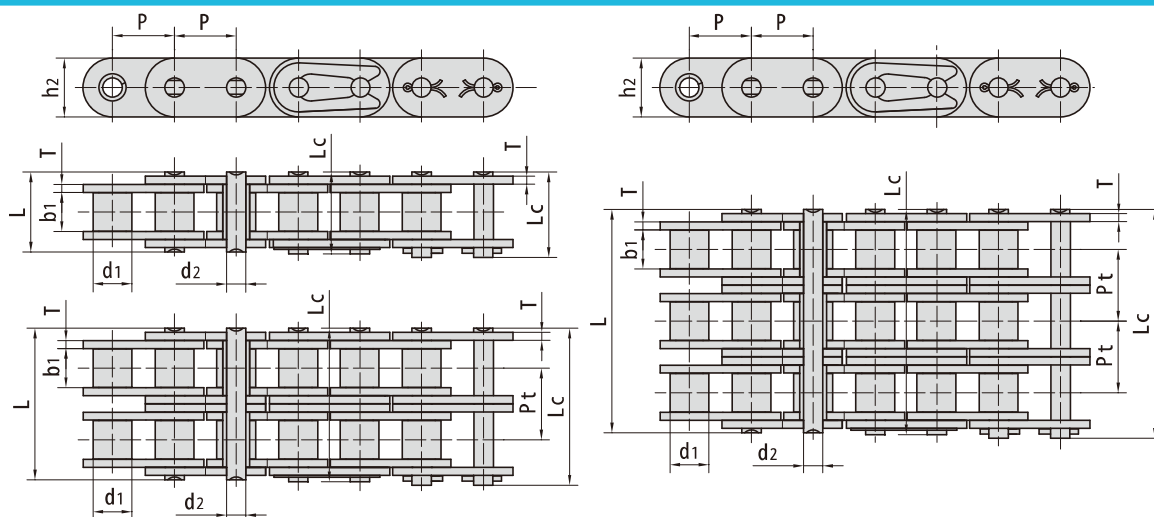


东华链号 Donghua Chain No.		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	抗拉强度	平均抗拉强度	每米长重
		Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Tensile strength	Average tensile strength	Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
	*C 35-1	9.525	5.08	4.77	3.58	13.3	14.3	9.00	1.30	-	7.9/1795	10.8	0.41
C 08A-1	C 40-1	12.700	7.95	7.85	3.96	16.6	18.8	12.00	1.50	-	14.1/3273	17.5	0.73
C 10A-1	C 50-1	15.875	10.16	9.40	5.08	20.7	23.3	15.09	2.03	-	22.2/5045	29.4	1.23
C 12A-1	C 60-1	19.050	11.91	12.57	5.94	25.9	28.3	18.0/18.2	2.42	-	31.8/7227	41.5	1.81/1.83
C 16A-1	C 80-1	25.400	15.88	15.75	7.92	32.7	36.5	24.00	3.25	-	56.7/12886	69.4	3.09
C 20A-1	C 100-1	31.750	19.05	18.90	9.53	40.4	44.7	30.00	4.00	-	88.5/20114	109.2	4.56
C 24A-1	C 120-1	38.100	22.23	25.22	11.10	50.3	54.3	35.70	4.80	-	127.0/28864	156.3	6.86
C 28A-1	C 140-1	44.450	25.40	25.22	12.70	54.4	59.0	41.00	5.60	-	172.4/39182	212.0	8.49
C 32A-1	C 160-1	50.800	28.58	31.55	14.27	64.8	69.6	47.80	6.40	-	226.8/51545	278.9	11.50
C 08A-2	C 40-2	12.700	7.95	7.85	3.96	31.0	33.2	12.00	1.50	14.38	28.2/6409	35.9	1.43
C 10A-2	C 50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	2.03	18.11	44.4/10091	58.1	2.42
C 12A-2	C 60-2	19.050	11.91	12.57	5.94	48.8	51.1	18.0/18.2	2.42	22.78	63.6/14455	82.1	3.58/3.62
C 16A-2	C 80-2	25.400	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	113.4/25773	141.8	6.12
C 20A-2	C 100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.0/40227	219.4	9.08
C 24A-2	C 120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.0/57727	314.9	13.60
C 28A-2	C 140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.8/78364	427.5	16.86
C 32A-2	C 160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.6/103091	562.4	22.90
C 08A-3	C 40-3	12.700	7.95	7.85	3.96	45.4	47.6	12.00	1.50	14.38	42.3/9614	50.0	2.14
C 10A-3	C 50-3	15.875	10.16	9.40	5.08	57.0	59.5	15.09	2.03	18.11	66.6/15136	77.8	3.62
C 12A-3	C 60-3	19.050	11.91	12.57	5.94	71.5	73.9	18.0/18.2	2.42	22.78	95.4/21682	111.1	5.36/5.41
C 16A-3	C 80-3	25.400	15.88	15.75	7.92	91.7	95.1	24.00	3.25	29.29	170.1/38659	198.4	9.10
C 20A-3	C 100-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	309.6	13.60
C 24A-3	C 120-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.0/86591	437.2	20.43
C 28A-3	C 140-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2/117545	593.3	25.23
C 32A-3	C 160-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4/154636	780.6	34.19

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

B系列直链板滚子链

Roller chains with straight side plates (B series)

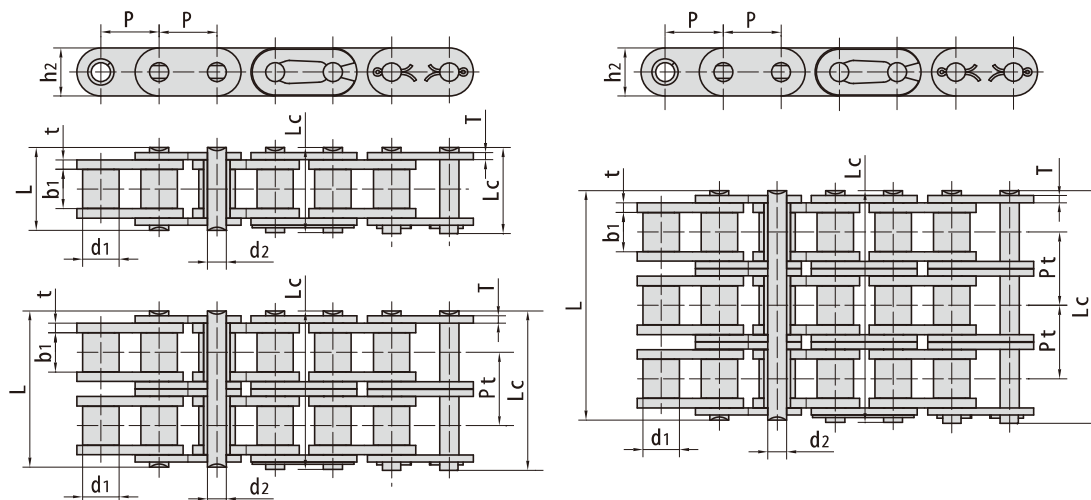


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
C 08B-1	12.700	8.51	7.75	4.45	16.7	18.2	11.8	1.60	-	18.0/4091	19.5	0.80
C 10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.70	-	22.4/5091	27.9	1.06
C 12B-1	19.050	12.07	11.68	5.72	22.5	25.2	16.0	1.85	-	29.0/6591	32.2	1.32
C 16B-1	25.400	15.88	17.02	8.28	36.1	39.1	21.0/24.0	4.15/3.1	-	60.0/13636	72.8	3.08/3.49
C 20B-1	31.750	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	-	95.0/21591	106.7	4.16
C 24B-1	38.100	25.40	25.40	14.63	53.4	57.8	33.2	6.0/4.8	-	160.0/36364	178.0	7.47
C 28B-1	44.450	27.94	30.99	15.90	65.1	69.5	36.7	7.5/6.0	-	200.0/45455	222.0	9.90
C 32B-1	50.800	29.21	30.99	17.81	66.0	71.0	42.0	7.0/6.0	-	250.0/56818	277.5	10.45
C 08B-2	12.700	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	32.0/7273	38.7	1.45
C 10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.70	16.59	44.5/10114	57.8	2.00
C 12B-2	19.050	12.07	11.68	5.72	42.0	44.7	16.0	1.85	19.46	57.8/13136	66.1	2.62
C 16B-2	25.400	15.88	17.02	8.28	68.0	71.0	21.0/24.0	4.15/3.1	31.88	106.0/24091	133.0	6.10/6.92
C 20B-2	31.750	19.05	19.56	10.19	77.8	81.5	26.4	4.5/3.5	36.45	170.0/38636	211.2	8.23
C 24B-2	38.100	25.40	25.40	14.63	101.7	106.2	33.2	6.0/4.8	48.36	280.0/63636	319.2	14.77
C 28B-2	44.450	27.94	30.99	15.90	124.6	129.1	36.7	7.5/6.0	59.56	360.0/81818	406.8	19.82
C 32B-2	50.800	29.21	30.99	17.81	124.6	129.6	42.0	7.0/6.0	58.55	450.0/102273	508.5	20.94
C 08B-3	12.700	8.51	7.75	4.45	45.1	46.1	11.8	1.60	13.92	47.5/10795	57.8	2.10
C 10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	1.70	16.59	66.7/15159	84.5	2.87
C 12B-3	19.050	12.07	11.68	5.72	61.5	64.2	16.0	1.85	19.46	86.7/19705	101.8	3.89
C 16B-3	25.400	15.88	17.02	8.28	99.8	102.9	21.0/24.0	4.15/3.1	31.88	160.0/36364	203.7	9.12/10.34
C 20B-3	31.750	19.05	19.56	10.19	114.2	117.9	26.4	4.5/3.5	36.45	250.0/56818	290.0	11.34
C 24B-3	38.100	25.40	25.40	14.63	150.1	154.6	33.2	6.0/4.8	48.36	425.0/96591	493.0	22.10
C 28B-3	44.450	27.94	30.99	15.90	184.2	188.7	36.7	7.5/6.0	59.56	530.0/120454	609.5	29.64
C 32B-3	50.800	29.21	30.99	17.81	183.2	188.2	42.0	7.0/6.0	58.55	670.0/152273	770.5	31.27

短节距输送链附件


Short pitch conveyor chain attachments



A1

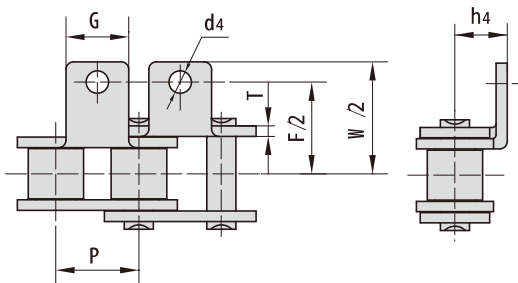

K1

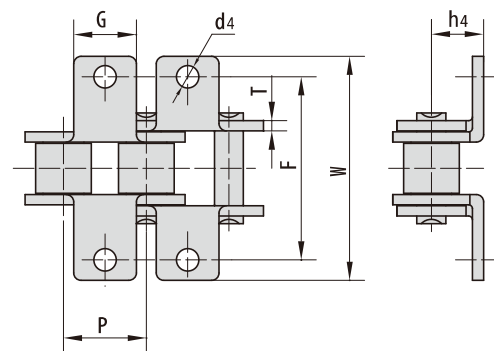

ISO/DIN 链号 ISO/DIN Chain No.	东华 链号 Donghua Chain No.	P	G	F	W	T	h4	d4
		mm	mm	mm	mm	mm	mm	mm
25	04C	6.350	5.6	13.80	23.2	0.80	4.30	3.4
35	06C	9.525	7.9	19.00	28.6	1.30	6.35	3.4
40	08A	12.700	9.5	25.40	35.2	1.50	7.90	3.4
41	085	12.700	9.5	24.00	33.4	1.30	6.90	3.6
50	10A	15.875	12.7	31.75	46.2	2.03	10.30	5.5
60	12A	19.050	15.9	38.10	55.6	2.42	11.90	5.5
80	16A	25.400	19.1	50.80	64.8	3.25	15.90	6.8
100	20A	31.750	25.4	63.50	89.8	4.00	19.80	9.2
120	24A	38.100	28.6	76.20	108.5	4.80	23.00	9.8
140	28A	44.450	34.9	88.90	123.0	5.60	28.60	11.4
160	32A	50.800	38.1	101.60	142.8	6.40	31.75	13.1
200	40A	63.500	50.8	127.00	179.0	8.00	42.88	16.3
*06B	*06B	9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B	08B	12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B	10B	15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B	12B	19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B	16B	25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B	20B	31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B	24B	38.100	30.0	76.20	108.4	4.80	26.67	10.5
28B	28B	44.450	35.0	88.90	123.0	6.00	28.58	13.1
32B	32B	50.800	38.1	101.60	142.8	6.00	31.75	13.1


*直链板
*Straight side plates

短节距输送链附件


Short pitch conveyor chain attachments



SA1/M 1单侧 (one side)

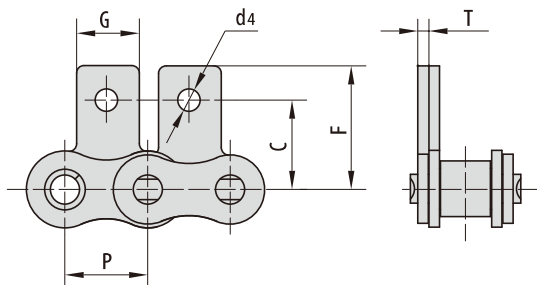

SK1/M 1双侧 (both sides)


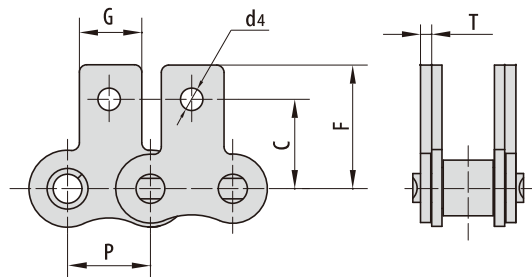


ISO/DIN 链号 ISO/DIN Chain No.	东华 链号 Donghua Chain No.	P	G	C	F	T	d4
		mm	mm	mm	mm	mm	mm
25	04C	6.350	5.6	7.95	11.70	0.80	3.4
35	06C	9.525	7.9	9.50	14.55	1.30	3.4
40	08A	12.700	9.5	12.70	19.05	1.50	3.4
41	085	12.700	9.5	11.85	16.55	1.30	3.6
50	10A	15.875	12.7	15.90	25.25	2.03	5.5
60	12A	19.050	15.9	18.30	29.33	2.42	5.5
80	16A	25.400	19.1	24.60	34.70	3.25	6.8
100	20A	31.750	25.4	31.80	43.30	4.00	9.2
120	24A	38.100	28.6	36.50	51.60	4.80	9.8
140	28A	44.450	34.9	44.50	62.00	5.60	11.4
160	32A	50.800	38.1	50.80	69.85	6.40	13.1
200	40A	63.500	50.8	63.50	88.90	8.00	16.3
*06B	*06B	9.525	8.0	9.52	13.50	1.30	3.5
08B	08B	12.700	9.5	13.35	18.90	1.60	4.3
10B	10B	15.875	14.3	16.50	22.95	1.70	5.3
12B	12B	19.050	16.0	21.45	28.60	1.85	6.4
16B	16B	25.400	19.1	23.15	34.00	3.10	6.4
20B	20B	31.750	35.0	30.50	45.70	3.50	9.0
24B	24B	38.100	36.0	36.00	61.50	4.80	10.5

*直链板
*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

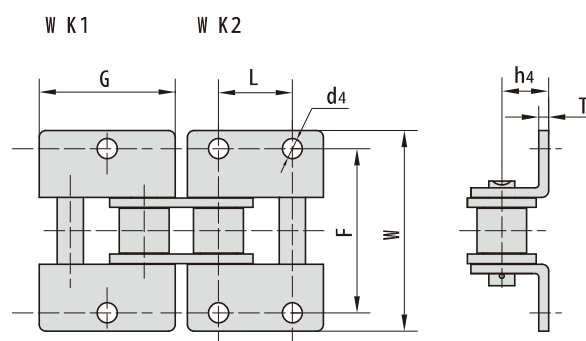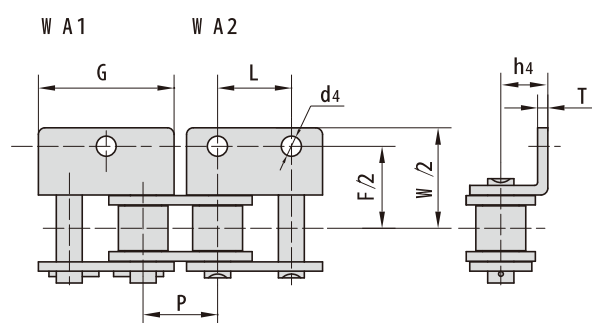



ISO/DIN 链号 ISO/DIN Chain No.	东华 链号 Donghua Chain No.	P	G	L	F	W	T	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm	mm
25	04C	6.350	11.41	6.350	13.80	23.2	0.80	4.30	3.40
35	06C	9.525	17.32	9.525	19.00	28.6	1.30	6.35	2.80
40	08A	12.700	23.00	12.700	25.40	35.6	1.50	7.90	3.40
41	08S	12.700	22.30	12.700	24.00	35.0	1.30	7.20	4.85
50	10A	15.875	28.80	15.875	31.75	46.8	2.03	10.30	5.50
60	12A	19.050	34.65	19.050	38.10	56.4	2.42	11.90	5.50
80	16A	25.400	45.90	25.400	50.80	73.2	3.25	15.90	6.80
100	20A	31.750	57.65	31.750	63.50	89.8	4.00	19.80	9.20
120	24A	38.100	69.30	38.100	76.20	108.8	4.80	23.00	9.80
140	28A	44.450	80.45	44.450	88.90	123.0	5.60	28.60	11.40
160	32A	50.800	92.00	50.800	101.60	142.8	6.40	31.75	13.10
200	40A	63.500	115.50	63.500	127.00	179.0	8.00	42.88	16.30
*06B	*06B	9.525	17.72	9.525	19.04	27.0	1.30	6.50	3.50
08B	08B	12.700	24.00	12.700	25.40	36.4	1.60	8.90	4.30
10B	10B	15.875	29.58	15.875	31.80	44.6	1.70	10.31	5.30
12B	12B	19.050	34.05	19.050	38.10	52.4	1.85	13.46	6.40
16B	16B	25.400	46.40	25.400	50.80	72.6	3.10	15.88	6.40
20B	20B	31.750	58.10	31.750	63.50	100.5	3.50	19.80	9.00
24B	24B	38.100	71.30	38.100	76.20	108.4	4.80	26.67	10.50
28B	28B	44.450	81.10	44.450	88.90	123.0	6.00	28.58	13.10
32B	32B	50.800	92.80	50.800	101.60	142.8	6.00	31.75	13.10

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

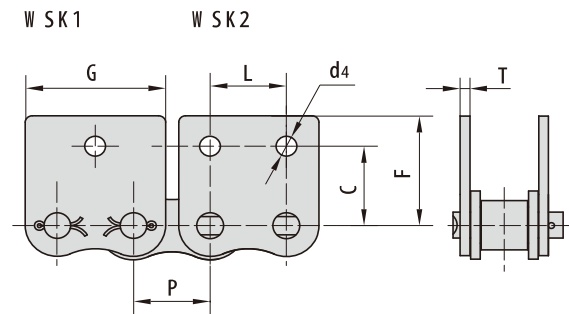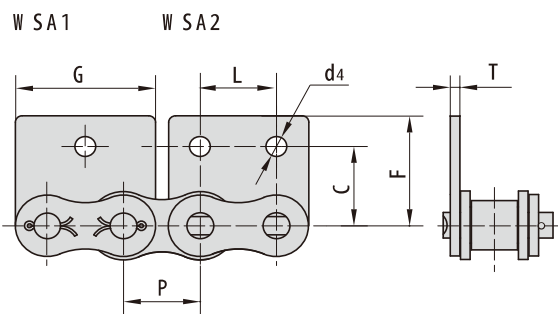



ISO/DIN 链号 ISO/DIN Chain No.	东华 链号 Donghua Chain No.	P	G	L	C	F	T	d4
		mm	mm	mm	mm	mm	mm	mm
25	04C	6.350	11.41	6.350	7.95	11.70	0.80	3.4
35	06C	9.525	17.32	9.525	9.50	14.55	1.30	2.8
40	08A	12.700	23.00	12.700	12.70	17.40	1.50	3.4
41	085	12.700	21.20	12.700	11.85	16.55	1.30	3.6
50	10A	15.875	28.80	15.875	15.90	23.05	2.03	5.5
60	12A	19.050	34.65	19.050	18.30	26.86	2.42	5.5
80	16A	25.400	45.90	25.400	24.60	35.45	3.25	6.8
100	20A	31.750	57.65	31.750	31.80	44.00	4.00	9.2
120	24A	38.100	69.30	38.100	36.50	51.60	4.80	9.8
140	28A	44.450	80.45	44.450	44.50	62.00	5.60	11.4
160	32A	50.800	92.00	50.800	50.80	69.85	6.40	13.1
200	40A	63.500	115.5	63.500	63.50	88.90	8.00	16.3
*06B	*06B	9.525	17.72	9.525	9.52	13.50	1.30	3.5
08B	08B	12.700	23.30	12.700	13.35	18.90	1.60	4.3
10B	10B	15.875	29.58	15.875	16.50	22.95	1.70	5.3
12B	12B	19.050	34.05	19.050	21.45	28.60	1.85	6.4
16B	16B	25.400	46.40	25.400	23.15	34.00	3.10	6.4
20B	20B	31.750	58.10	31.750	30.50	45.70	3.50	9.0
24B	24B	38.100	71.30	38.100	42.70	61.50	4.80	10.5

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

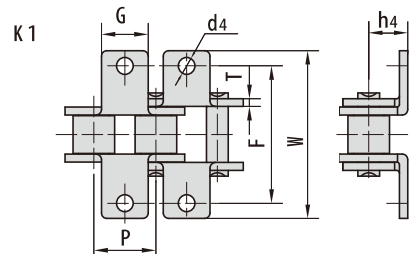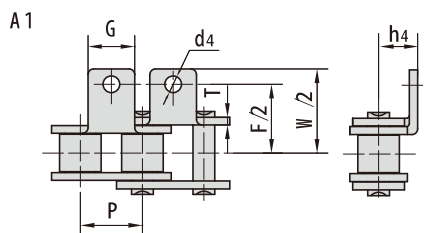



东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
04CA1F2	6.350	6.00	22.20	29.00	0.80	2.50	2.00
25K1F1	6.350	5.60	14.27	21.38	0.80	4.75	3.40
05BA1F1	8.000	8.00	14.00	21.00	0.80	5.00	3.10
*06BK1F3	9.525	8.00	18.81	26.81	1.15	6.50	3.50
*06BK1F5	9.525	8.00	19.04	27.04	1.30	6.50	4.50
*06BK1F6	9.525	8.00	29.08	41.68	1.30	8.90	4.50
06CA1F1	9.525	7.90	19.20	28.80	1.30	6.35	2.80
06CA1F2	9.525	7.90	19.20	28.80	1.30	6.35	4.00
*C 40A1F1	12.700	10.00	25.40	33.40	1.50	9.10	3.40
08AA1F1	12.700	9.50	38.50	44.50	1.50	8.20	3.60
08AA1F10	12.700	9.60	28.00	36.20	1.50	8.50	3.20
08AA1F12	12.700	9.50	25.40	35.20	1.50	7.90	3.20
08AA1F14	12.700	10.80	26.40	35.40	1.50	9.00	4.40
08AA1F15	12.700	18.00	26.40	39.00	1.50	9.00	4.20
08AA1F18	12.700	11.00	36.85	46.00	1.50	7.90	3.60
08AA1F2	12.700	9.50	25.40	35.20	1.50	7.90	4.85
08AA1F3	12.700	15.88	25.40	35.60	1.50	8.00	4.95
08AA1F6	12.700	9.50	25.40	35.20	1.50	7.90	5.00
08AA1F7	12.700	18.00	37.00	52.00	1.50	8.00	5.20
08AA1F9	12.700	9.60	55.40	62.50	1.50	7.50	4.20
08AK1F16	12.700	10.50	25.40	38.80	1.50	7.95	5.50
08AK1F2	12.700	9.50	25.40	35.20	1.50	7.90	4.85
08AK1F4	12.700	9.50	25.39	35.19	1.50	7.90	5.50
08BA1F11	12.700	11.00	25.40	36.40	1.60	8.90	4.30
08BA1F16	12.700	12.30	27.80	42.80	1.60	21.00	5.20
08BA1F18	12.700	9.50	28.30	37.00	1.60	8.00	4.30
08BA1F2	12.700	11.40	38.60	49.60	1.60	8.90	3.50
08BA1F20	12.700	12.60	22.95	33.95	1.60	10.20	5.00
08BA1F28	12.700	9.50	25.40	34.52	1.60	9.95	4.00
08BA1F30	12.700	11.00	26.23	35.43	1.60	9.00	4.50
08BA1F33	12.700	10.00	30.40	38.80	1.60	8.20	3.10
08BA1F34	12.700	9.60	36.40	48.00	1.60	9.60	3.20

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

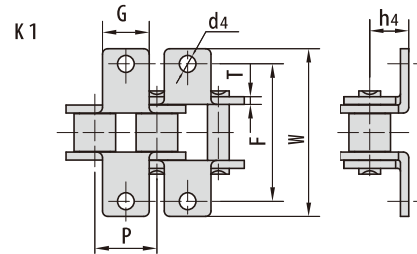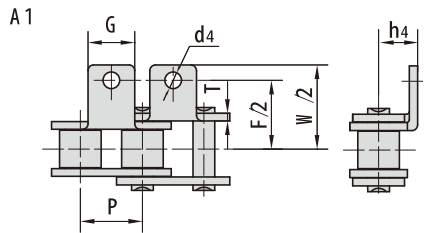



东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
08BA1F39	12.700	9.50	36.40	44.00	1.60	9.50	3.20
08BA1F40	12.700	9.50	26.60	34.20	1.60	8.50	3.20
08BA1F41	12.700	12.50	35.00	43.00	1.60	9.00	3.70
08BA1F47	12.700	9.50	26.60	32.60	1.60	8.50	3.10
08BA1F48	12.700	13.00	38.20	48.60	1.60	10.50	6.10
08BA1F49	12.700	12.00	26.00	38.80	1.60	8.00	3.50
08BA1F51	12.700	9.50	25.40	35.20	1.60	8.90	4.30
08BA1F53	12.700	11.00	26.00	36.40	1.60	8.90	6.5×4.5
08BA1F56	12.700	9.50	34.20	43.70	1.60	9.00	3.10
08BA1F58	12.700	9.50	47.00	57.50	1.60	8.90	4.50
08BA1F6	12.700	18.00	25.80	37.80	1.60	8.00	4.20
08BA1F8	12.700	11.20	21.85	32.85	2.50	8.90	4.30
08BA3F1	12.700	22.70	33.20	46.90	1.60	7.80	2.9/6.7
08BF30	12.700	18.00	27.20	40.00	1.60	8.00	4.30
08BF33	12.700	9.50	27.74	38.80	1.60	8.50	3.10
08BK1F10	12.700	11.00	27.77	38.77	1.55	8.75	4.30
08BK1F14	12.700	11.00	25.57	36.57	1.60	8.90	6.50
08BK1F15	12.700	17.90	27.60	39.60	1.60	8.00	7.10
08BK1F26	12.700	11.00	26.50	36.00	1.60	8.80	4.40
08BK1F29	12.700	12.50	26.20	38.00	1.60	10.00	4.50
08BK1F35	12.700	9.50	25.33	35.03	1.60	8.90	M 3
08BK1F43	12.700	9.50	28.20	37.20	1.60	8.40	4.30
08BK1F44	12.700	11.50	26.00	36.00	1.60	8.50	4.20
08BK1F5	12.700	9.50	29.00	38.70	1.60	7.10	4.50
08BK1F54	12.700	14.00	30.20	42.00	1.60	8.90	5.50
08BK1F55	12.700	12.00	25.40	36.40	1.60	8.90	5.00
08BK1F57	12.700	12.00	25.40	36.40	1.60	8.90	5.50
08BK1F7	12.700	9.50	29.00	39.00	1.60	7.00	4.50
08BK1F9	12.700	9.50	25.40	36.40	1.60	8.90	M 4
428HK1F3	12.700	11.50	30.00	43.50	2.03	8.90	5.50
*C 10BK0F1	15.875	13.00	-	35.00	1.70	10.30	-
10AA1F10	15.875	12.70	31.80	46.20	2.03	10.30	M 5
10AA1F11	15.875	12.70	31.80	46.20	2.03	25.30	5.50

*直链板

*Straight side plates

短节距输送链附件



Short pitch conveyor chain attachments

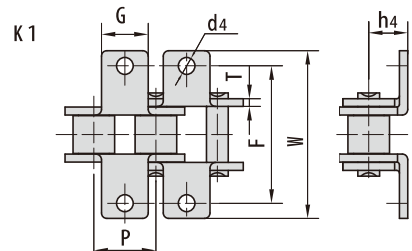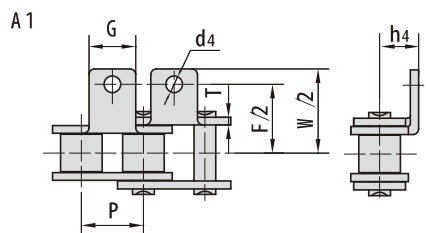

东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
10AA1F13	15.875	14.00	33.20	50.40	2.03	11.50	3.10
10AA2F1	15.875	24.10	33.60	43.20	2.03	8.20	3.50
10AHK1F1	15.875	12.70	34.00	48.40	2.42	10.30	M 5
10AHK1F2	15.875	12.70	33.00	47.40	2.42	10.40	M 5
10AK1F23	15.875	20.00	32.16	48.06	2.03	10.90	6.50
10AK1F24	15.875	12.70	31.75	46.20	2.03	10.30	5.20
10AK1F3	15.875	14.29	31.75	46.20	2.03	10.30	5.50
10AK1F5	15.875	20.00	39.00	50.10	2.03	12.50	M 5
10AK1F7	15.875	12.70	31.80	46.20	2.03	10.30	M 6
10AK1F8	15.875	12.70	31.80	46.20	2.03	10.30	6.50
10AK1F9	15.875	20.00	38.97	50.07	2.03	12.50	5.50
10BA0F2	15.875	14.00	-	49.41	1.70	10.30	-
10BA0F3	15.875	14.00	-	46.51	1.70	10.40	-
10BA1F11	15.875	15.00	31.80	49.60	1.70	10.30	M 5
10BA1F13	15.875	14.10	30.81	48.01	1.70	10.50	M 5
10BA1F14	15.875	14.30	31.76	44.60	1.70	10.31	6.40
10BF11	15.875	14.00	-	51.81	1.70	10.40	-
10BK0F4	15.875	14.00	-	45.81	1.70	10.30	-
10BK0F5	15.875	15.00	-	69.20	1.70	10.31	-
10BK1F12	15.875	13.00	32.41	50.11	1.70	11.00	6.00
10BK1F17	15.875	14.30	31.80	44.60	1.70	10.31	7.3×5.5
10BK1F18	15.875	14.00	32.78	49.96	1.70	11.50	3.10
10BK1F19	15.875	12.80	32.00	46.60	1.70	10.60	M 6
10BK1F2	15.875	13.00	32.40	45.20	1.70	11.00	6.00
10BK1F21	15.875	14.00	35.00	50.80	1.70	9.00	7.10
10BK1F22	15.875	14.10	31.80	47.60	1.70	10.40	5.20
10BK1F3	15.875	13.00	32.41	51.11	1.70	10.50	6.00
10BK1F4	15.875	17.50	30.41	47.41	1.70	11.50	6.00
10BK1F5	15.875	13.00	29.41	42.21	1.70	10.00	5.50
10BK1F6	15.875	12.70	30.00	47.00	1.70	10.20	5.30
10BK1F7	15.875	14.00	31.50	49.60	1.70	10.30	5.50
10BK1F8	15.875	14.00	31.41	48.31	1.70	10.50	5.30
10BSBA1F2	15.875	13.50	30.00	44.40	1.70	10.50	5.30

短节距输送链附件

Short pitch conveyor chain attachments

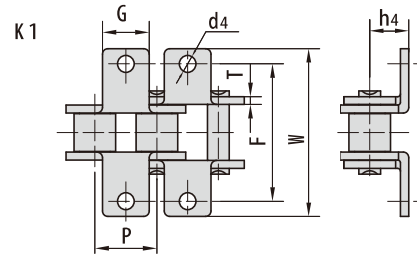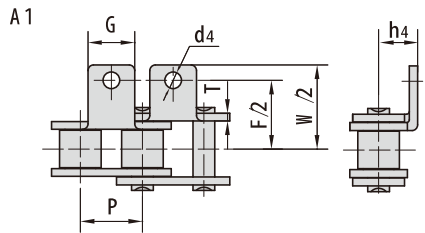



东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
500RA1F14	15.875	12.70	34.40	48.80	2.03	10.30	5.20
*C12BA1F26	19.050	16.00	37.60	56.00	1.85	13.50	7.20
12AA1F10	19.050	15.90	38.10	55.60	2.42	11.90	7.00
12AA1F32	19.050	25.00	44.84	58.84	2.42	21.00	5.50
12AA1F33	19.050	15.90	38.10	55.60	2.42	11.90	6.30
12AA1F7	19.050	15.90	38.10	55.50	2.42	11.90	6.00
12AA2F11	19.050	21.00	40.00	51.20	2.42	11.90	5.30
12AK1F1	19.050	15.90	40.00	55.60	2.42	11.90	6.20
12AK1F22	19.050	15.90	38.10	55.50	2.42	13.46	M 5
12AK1F27	19.050	15.90	60.80	78.20	2.42	11.90	6.35
12AK1F28	19.050	15.90	38.10	55.60	2.42	11.90	8.50
12AK1F30	19.050	15.90	38.20	55.60	2.42	11.90	6.50
12AK1F31	19.050	25.00	45.50	64.50	2.42	11.90	8.20
12AK1F34	19.050	15.90	38.10	55.60	2.42	11.90	M 6
12AK1F36	19.050	15.90	38.10	55.60	2.42	11.90	M 4
12AK1F4	19.050	15.90	38.10	55.50	2.42	11.90	M 5
12AK1F7	19.050	15.90	38.10	55.60	2.42	11.90	6.00
12AK1F8	19.050	15.90	40.00	55.60	2.42	11.90	6.80
12BA0F1	19.050	36.10	-	56.75	1.85	12.00	-
12BA0F3	19.050	33.60	-	56.80	1.85	11.50	-
12BA1F1	19.050	16.00	38.10	52.40	1.85	13.46	8.20
12BA1F12	19.050	18.00	35.20	52.70	1.85	12.20	6.40
12BA1F18	19.050	24.00	35.45	51.75	1.85	12.00	6.60
12BA1F23	19.050	18.00	36.00	56.60	1.85	11.00	M 6
12BA1F30	19.050	20.00	45.70	65.60	1.80	12.00	6.40
12BA1F34	19.050	15.90	34.25	55.60	1.85	11.90	10.9×6.4
12BFK1	19.050	16.50	40.00	54.80	1.85	12.00	6.60
12BK1F10	19.050	20.50	40.00	54.50	1.85	12.00	8.50
12BK1F11	19.050	16.00	38.15	52.55	1.85	13.46	10.00
12BK1F13	19.050	16.00	40.00	60.00	2.03	11.90	6.50
12BK1F15	19.050	18.00	37.00	54.60	1.85	12.20	6.40
12BK1F17	19.050	16.00	35.64	55.24	1.85	11.90	6.70
12BK1F19	19.050	18.00	36.00	55.40	1.85	12.00	6.60
12BK1F2	19.050	16.00	38.10	52.40	1.85	13.46	8.00

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

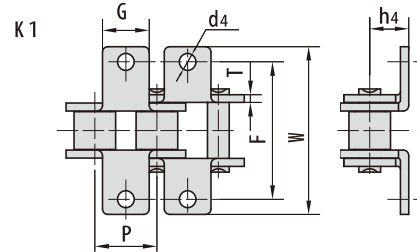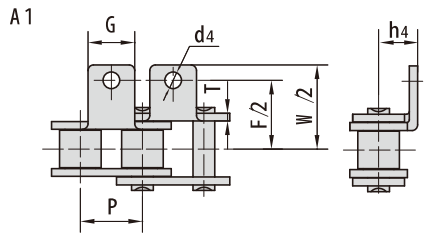



东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
12BK1F20	19.050	16.00	35.20	51.40	1.85	12.00	7.60
12BK1F24	19.050	18.50	37.20	58.00	1.85	11.00	M 6
12BK1F27	19.050	16.00	28.00	37.60	1.85	12.20	5.00
12BK1F28	19.050	16.00	41.00	54.65	1.85	10.00	6.40
12BK1F29	19.050	16.00	40.00	54.40	1.85	13.40	6.30
12BK1F31	19.050	20.00	44.80	64.80	1.85	11.70	6.50
12BK1F32	19.050	18.00	35.80	55.50	1.85	12.00	10.00
12BK1F33	19.050	16.00	38.10	52.40	1.85	13.46	8.10
12BK1F37	19.050	16.00	28.00	42.00	1.85	13.00	4.50
12BK1F38	19.050	16.00	38.10	52.44	1.85	13.46	7.20
12BK1F4	19.050	16.00	38.10	52.40	1.85	13.46	6.40
12BK1F40	19.050	18.00	35.44	54.94	1.80	11.60	6.40
12BK1F41	19.050	16.00	35.00	51.60	1.85	12.00	5.60
12BK1F5	19.050	18.00	35.44	54.05	1.80	11.60	6.40
12BK1F6	19.050	16.00	35.00	52.40	1.85	13.46	6.40
12BK1F8	19.050	18.00	35.20	50.40	1.85	12.20	6.40
12BK1F9	19.050	16.00	24.80	39.00	1.85	13.46	6.40
*C 16BK1F40	25.400	16.00	37.60	56.00	1.85	13.50	7.20
16AA1F12	25.400	19.10	44.00	64.80	3.25	15.90	6.00
16AA1F19	25.400	24.00	50.80	72.80	3.25	15.90	9.00
16AA1F36	25.400	19.10	50.80	64.80	3.25	15.90	8.00
16AA1F4	25.400	19.10	50.80	64.80	3.25	15.90	6.00
16AA1F43	25.400	19.10	50.80	64.80	3.25	15.90	8.20
16AHA1F1	25.400	36.50	52.80	85.80	4.00	15.90	8.90
16AHK1F10	25.400	29.00	50.80	70.60	4.00	19.10	8.20
16AHK1F11	25.400	29.00	58.00	82.60	4.00	16.90	8.10
16AHK1F12	25.400	19.10	50.80	70.60	4.00	19.10	8.50
16AK1F10	25.400	19.10	50.80	64.80	3.25	15.90	10.00
16AK1F14	25.400	19.10	50.71	64.71	3.25	15.90	7.00
16AK1F17	25.400	19.10	50.80	78.60	3.25	15.90	6.80
16AK1F2	25.400	38.10	50.71	73.11	3.25	15.90	7.00
16AK1F3	25.400	30.00	56.30	82.40	3.25	16.00	6.50

*直链板

*Straight side plates

短节距输送链附件



Short pitch conveyor chain attachments

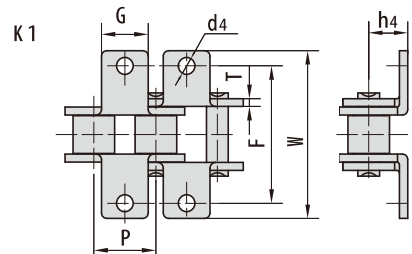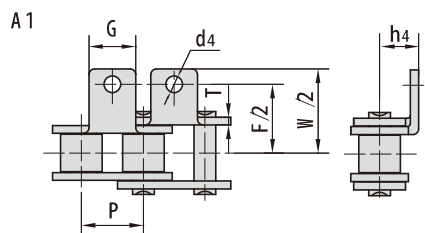

东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
16AK1F39	25.400	19.10	50.80	64.80	3.25	15.90	5.00
16AK1F40	25.400	19.10	50.80	64.80	3.25	15.90	8.60
16AK1F42	25.400	19.10	50.80	73.20	3.25	15.90	6.80
16AK1F5	25.400	25.40	44.00	56.00	3.25	15.90	6.00
16AK1F6	25.400	24.00	44.00	56.00	3.25	15.90	6.00
16AK1F8	25.400	25.00	57.80	74.90	3.25	14.50	6.80
16BA1F51	25.400	24.00	57.60	82.60	3.10	17.00	9.00
16BA1F7	25.400	24.00	58.00	75.60	3.10	18.00	9.00
16BK1F10	25.400	24.00	53.58	77.58	3.00	16.30	8.20
16BK1F11	25.400	26.00	58.00	74.60	4.00	18.00	9.00
16BK1F13	25.400	25.00	58.00	84.40	3.10	18.00	9.00
16BK1F15	25.400	25.00	68.00	130.00	3.10	17.00	9.10
16BK1F16	25.400	23.80	58.00	83.80	1.85	17.00	8.40
16BK1F17	25.400	25.00	50.80	70.20	4.15	20.20	9.10
16BK1F19	25.400	24.00	57.15	75.00	4.15	18.00	9.00
16BK1F22	25.400	18.00	54.60	72.00	3.10	18.00	10.00
16BK1F28	25.400	25.00	57.80	83.60	3.10	18.00	9.00
16BK1F3	25.400	19.10	50.80	72.60	3.10	15.88	8.20
16BK1F34	25.400	25.40	50.80	72.10	3.10	15.88	M 6
16BK1F4	25.400	36.00	54.00	78.60	3.10	16.00	8.20
16BK1F41	25.400	24.00	57.62	75.62	3.10	20.20	8.40
16BK1F42	25.400	24.00	57.72	75.72	3.10	16.50	9.00
16BK1F43	25.400	24.00	58.00	75.60	3.10	18.00	10.00
16BK1F44	25.400	25.00	58.00	84.40	3.10	18.00	10.20
16BK1F45	25.400	23.80	58.00	83.82	3.10	17.00	8.00
16BK1F46	25.400	36.00	54.00	78.60	3.10	16.00	8.40
16BK1F47	25.400	36.00	54.00	78.60	3.10	16.00	10.00
16BK1F48	25.400	19.05	54.43	72.80	3.10	16.00	12.6×9.0
16BK1F49	25.400	19.10	50.80	72.60	4.15	15.88	8.20
16BK1F5	25.400	25.00	57.80	83.60	3.10	19.00	9.00
16BK1F52	25.400	40.00	59.58	83.00	3.10	16.85	8.60
16BK1F53	25.400	24.00	58.00	79.60	3.10	18.00	9.00
16BK1F54	25.400	25.00	62.12	88.32	3.10	18.00	9.00
16BK1F56	25.400	19.00	50.80	74.80	3.10	15.90	6.80
20AHK1F1	31.750	25.40	61.08	87.675	4.80	19.81	10.30
20AK1F2	31.750	25.40	53.25	77.15	6.00	19.84	8.20

短节距输送链附件

Short pitch conveyor chain attachments

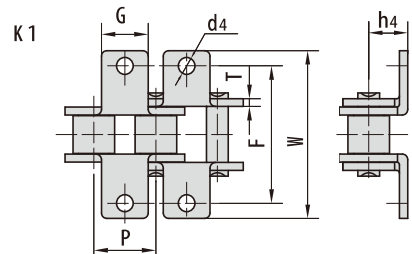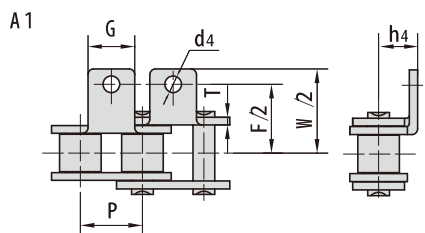


东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
20AK1F3	31.750	25.40	63.50	87.30	4.00	19.80	8.70
20AK1F4	31.750	25.40	63.50	89.80	4.00	19.80	8.20
20AK1F5	31.750	26.00	68.00	88.00	4.00	23.50	11.0×8.6
20AK1F7	31.750	25.40	63.50	89.60	4.00	19.80	9.20
20AK1F9	31.750	25.40	63.50	89.60	4.00	19.80	10.50
20BA1F6	31.750	35.00	63.50	100.50	3.50	19.80	11.00
20BA2F7	31.750	58.10	63.40	100.40	3.50	19.80	10.50
20BK1F2	31.750	26.00	68.00	88.00	4.50	23.50	9.60
20BK1F4	31.750	25.40	63.50	100.50	3.50	19.80	9.00
20BK1F5	31.750	35.00	65.00	94.20	3.50	19.80	12.50
20BK1F7	31.750	35.00	70.00	100.50	3.50	22.00	8.50
20BK1F8	31.750	35.00	67.00	104.00	3.50	18.00	9.00
*C 24BK0F1	38.100	30.00	-	118.00	6.00	25.00	-
*C 24BK1F1	38.100	30.00	77.00	108.40	6.00	25.00	10.50
24AA1F1	38.100	28.60	76.20	111.60	4.80	23.80	9.80
24AA1F10	38.100	38.00	88.20	128.00	4.80	27.40	10.50
24AA1F12	38.100	28.40	75.40	99.60	4.80	23.00	10.30
24AA1F14	38.100	28.60	76.20	108.50	4.80	23.00	10.30
24AA1F3	38.100	45.00	110.00	138.00	10.00	30.00	14.00
24AK1F11	38.100	28.60	76.20	108.50	4.80	23.00	M 4
24AK1F4	38.100	28.60	88.90	108.80	4.80	23.00	12.00
24AK1F6	38.100	45.00	100.00	128.00	8.00	30.00	12.00
24AK1F7	38.100	30.00	77.00	101.60	4.80	30.00	11.00
24BK1F2	38.100	38.00	88.00	128.00	4.80	25.00	11.00
28AK1F6	44.450	35.50	88.90	107.70	5.60	28.60	11.40
28BF5	44.450	55.00	120.00	148.00	10.00	30.00	14.00
28BF6	44.450	55.00	120.00	154.00	10.00	30.00	20×14
28BK1F2	44.450	55.00	120.00	148.00	10.00	30.00	14.00
28BK1F3	44.450	74.00	108.00	155.00	6.00	32.00	13.00
28BK1F4	44.450	35.00	107.00	158.00	6.00	32.00	14.00
32AK1F1	50.800	38.10	101.60	142.80	6.40	31.75	14.30
32BK1F1	50.800	50.80	108.00	152.60	6.00	35.00	14.00
36AK1F1	57.150	40.00	114.30	144.30	7.20	42.00	15.00
40BK1F1	63.500	40.00	140.00	173.40	8.00	48.825	13.00

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

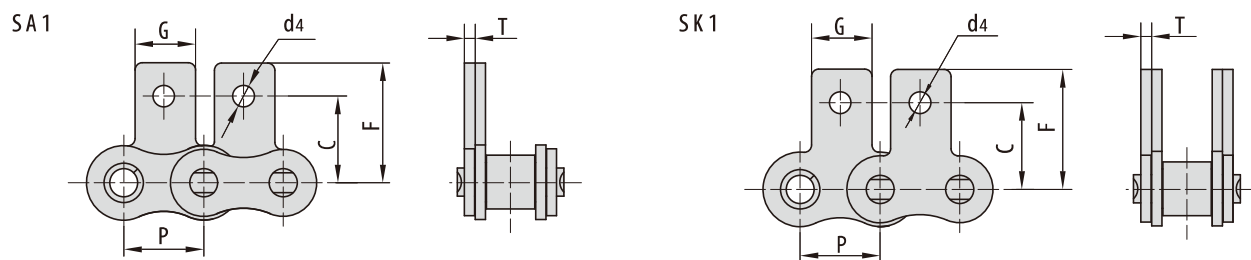


东华链号 Donghua Chain No.	P	G	C	F	T	d4
	mm	mm	mm	mm	mm	mm
05BSA1F1	8.000	8.00	8.00	11.50	0.80	3.10
05BSK1F2	8.000	8.00	7.50	11.50	0.80	3.00
*06BSA0F2	9.525	8.00	-	22.10	1.30	-
*06BSK1F2	9.525	8.00	9.50	13.50	1.15	3.50
06CSA0	9.525	17.32	-	14.55	1.30	-
35SK1F1	9.525	7.90	9.50	14.55	1.30	4.00
*C08BSA1F21	12.700	9.50	13.35	18.90	1.60	5.30
08ASA1F2	12.700	9.50	8.73	17.50	1.50	4.76
08ASA1F3	12.700	9.60	12.70	17.30	1.50	3.60
08ASA1F4	12.700	9.50	12.70	19.05	1.50	4.20
08ASK0F1	12.700	9.50	-	22.23	1.50	-
08BA1F52	12.700	9.50	-	15.00	1.60	-
08BHSK1F1	12.700	11.00	13.35	18.90	2.03	6.50
08BSA0F1	12.700	11.00	-	19.00	1.60	-
08BSA1F1	12.700	18.00	15.00	21.50	1.60	6.30
08BSA1F19	12.700	18.00	15.00	21.50	1.60	8.00
08BSA1F32	12.700	11.00	14.30	20.00	1.60	6.35
08BSA1F8	12.700	12.50	14.70	20.30	1.60	4.50
08BSA1F9	12.700	12.50	14.70	20.30	1.60	4.50
08BSK0F4	12.700	11.00	-	45.00	1.60	-
08BSK0F7	12.700	10.00	-	23.80	1.60	-
08BSK1F12	12.700	12.50	14.70	20.30	1.60	5.00
08BSK1F2	12.700	11.00	13.40	18.90	1.60	4.30
08BSK1F22	12.700	11.00	13.00	20.80	1.60	4.45
08BSK1F3	12.700	11.00	14.10	19.50	1.55	4.30
08BSK1F34	12.700	9.50	14.10	19.20	1.60	4.30

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

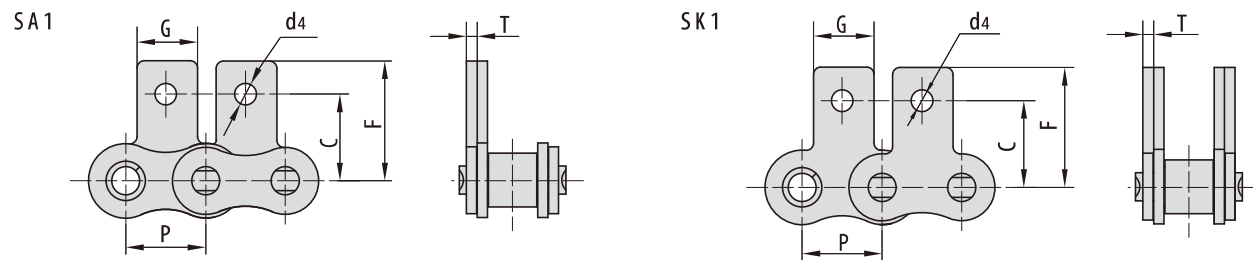


东华链号 Donghua Chain No.	P	G	C	F	T	d4
	mm	mm	mm	mm	mm	mm
08BSK1F4	12.700	11.00	13.35	18.90	1.60	6.50
08BSK1F5	12.700	9.50	13.35	18.90	1.60	6.30
08BSK1F6	12.700	11.00	14.30	19.30	1.60	4.30
08BSK1F7	12.700	11.00	13.00	20.80	1.60	4.45
41SK1F3	12.700	9.50	11.85	16.55	1.30	6.20
10ASA0F2	15.875	28.50	-	93.00	2.03	-
10ASA1F8	15.875	12.70	15.90	25.25	2.03	8.00
10ASK1F1	15.875	20.00	15.68	22.88	2.03	8.50
10ASK1F3	15.875	12.70	15.25	23.60	2.03	5.30
10ASK1F6	15.875	12.70	15.90	25.25	2.03	6.10
10BSA0F1	15.875	8.22	-	29.52	1.70	-
10BSA1F3	15.875	24.00	16.00	24.20	1.70	5.10
10BSK1F5	15.875	14.10	15.90	23.70	1.70	5.20
*C 12ASK1F6	19.050	15.75	17.78	25.50	2.42	5.70
12ASA1F4	19.050	15.90	18.30	29.33	2.42	8.50
12ASK1F1	19.050	15.90	18.30	29.33	2.42	6.10
12BSA1F3	19.050	17.00	16.00	26.60	1.85	8.00
12BSA1F4	19.050	18.00	17.00	27.00	1.85	8.00
12BSK0F1	19.050	15.00	-	26.50	1.85	-
12BSK0F4	19.050	15.90	-	26.00	3.30	-
12BSK1F1	19.050	18.00	18.20	28.10	1.80	6.40
12BSK1F2	19.050	18.00	18.30	26.10	1.85	6.20
12BSK1F6	19.050	18.00	18.20	28.10	1.80	6.40
12BSK1F7	19.050	16.00	17.90	26.20	1.85	5.60
*C 16ASA2F1	25.400	49.40	29.50	39.50	3.25	5.50
*C 16BSK0F1	25.400	25.00	-	25.00	4.15	-

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

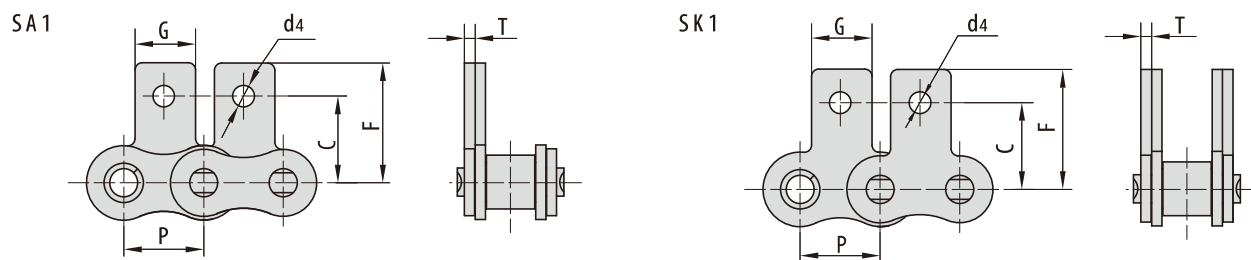


东华链号 Donghua Chain No.	P	G	C	F	T	d4
	mm	mm	mm	mm	mm	mm
*C 16BSK0F3	25.400	23.94	-	22.20	3.10	-
*C 16BSK0F4	25.400	46.90	-	20.50	3.10	-
16ASAF1	25.400	19.10	-	34.70	3.25	-
16ASAF2	25.400	19.10	-	34.70	3.25	-
16AWSK1F3	25.400	45.90	16.00	34.40	3.25	14.52
16BSA1F6	25.400	25.40	27.30	36.00	3.10	8.40
16BSK1F10	25.400	36.20	24.60	36.60	3.10	8.20
16BSK1F11	25.400	19.00	26.00	35.00	3.10	6.80
16BSK1F2	25.400	24.00	25.40	37.40	3.00	8.20
16BSK1F3	25.400	19.10	23.15	34.00	3.10	9.00
16BSK1F7	25.400	19.10	23.15	34.00	3.10	8.00
16BSK1F8	25.400	24.00	31.00	41.00	3.10	10.00
16BSK1F9	25.400	24.00	31.10	39.10	3.10	9.00
16BWSK0F8	25.400	47.00	-	38.00	4.15	-
20BSK1F1	31.750	25.40	30.50	45.70	3.50	9.00
24ASK1F3	38.100	28.60	34.40	50.70	4.80	9.80
24ASK1F4	38.100	28.60	36.50	51.60	4.80	10.30
24BSK1F1	38.100	30.00	42.65	61.70	4.80	10.50
24BSK1F2	38.100	36.00	43.20	61.50	4.80	20.3/11.6
24BSK1F4	38.100	30.00	36.50	51.40	4.80	10.50
28SK1F1	44.450	41.00	44.50	62.00	6.00	16.00
32ASWA2F1	50.800	92.00	48.90	69.50	6.40	13.10
32BSK1F1	50.800	50.80	53.50	77.00	6.00	14.00
40ASA1F2	63.500	63.50	40.00	56.00	8.00	22.00
40BSK1F1	63.500	56.00	48.00	68.00	8.50	16.20

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

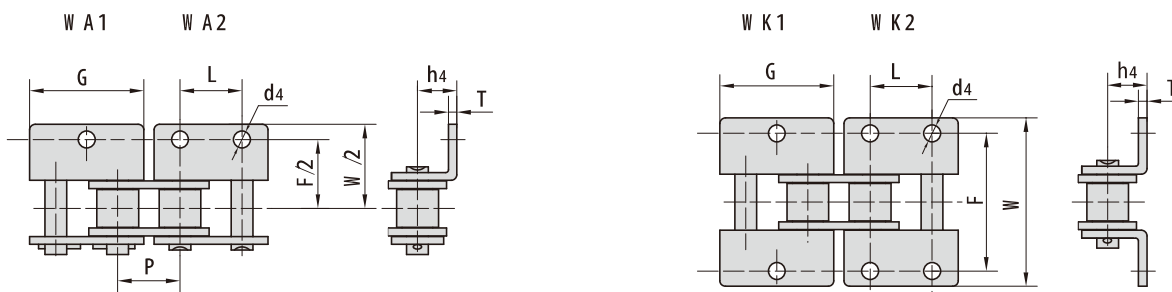


东华链号 Donghua Chain No.	P	G	L	F	W	T	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
*06BK2F2	9.525	17.75	9.520	18.80	26.80	1.15	6.50	3.50
*06BW K2F1	9.525	17.70	9.525	19.50	28.50	1.30	6.70	4.10
06CK2F4	9.525	18.50	9.525	19.10	28.60	1.30	6.45	5.00
08AW A1F2	12.700	24.00	-	56.40	68.60	2.00	9.60	5.10
08AW A2F2	12.700	23.00	12.700	25.40	35.60	1.50	7.90	3.60
08AW K1F1	12.700	23.00	-	25.40	35.60	1.50	7.90	4.20
08AW K1F2	12.700	23.00	-	25.40	35.60	1.50	7.90	M 5
08AW K1F3	12.700	23.00	-	25.52	35.72	1.50	7.90	5.50
08B (W) K2F30	12.700	23.30	12.700	28.18	37.18	1.60	8.40	4.30
08BA1F45	12.700	18.00	-	27.60	39.60	1.60	8.00	4.30
08BF30W K2	12.700	23.00	12.700	42.00	52.30	1.60	6.50	5.15
08BK2F30	12.700	23.30	12.700	28.20	37.20	1.60	8.40	4.30
08BW A1F1	12.700	23.30	-	27.40	38.80	1.60	8.00	4.30
08BW A1F16	12.700	23.10	-	26.00	36.40	1.60	8.90	6.5×4.5
08BW A1F17	12.700	25.00	-	30.00	45.00	1.60	10.00	8.00
08BW A1F18	12.700	23.30	-	25.50	35.20	1.60	8.90	6.00
08BW A1F19	12.700	24.00	-	25.40	36.60	1.60	7.00	M 5
08BW A1F6	12.700	24.00	-	25.40	38.80	1.60	8.90	6.60
08BW A2F25	12.700	24.50	12.700	25.40	35.20	1.60	8.90	4.50
08BW A2F30	12.700	23.30	12.700	30.00	42.00	1.60	8.50	4.30
08BW A2F31	12.700	23.30	14.000	25.40	43.00	1.60	8.90	4.00
08BW A2F33	12.700	23.30	12.700	27.60	40.80	1.60	8.50	4.30
08BW A2F34	12.700	23.60	12.700	32.60	44.60	1.60	9.50	4.20
08BW A2F4	12.700	24.00	12.700	25.40	36.40	1.60	8.90	4.30
08BW A2F6	12.700	25.00	12.500	26.00	35.60	1.60	8.90	4.50
08BW K1F10	12.700	24.00	-	62.83	75.43	2.00	10.00	5.00
08BW K1F11	12.700	23.30	-	25.40	35.20	1.60	8.90	5.00
08BW K1F12	12.700	23.30	-	25.40	35.10	1.60	8.90	M 5
08BW K2F2	12.700	23.20	12.700	28.40	42.60	3.00	8.50	5.40

*直链板
*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

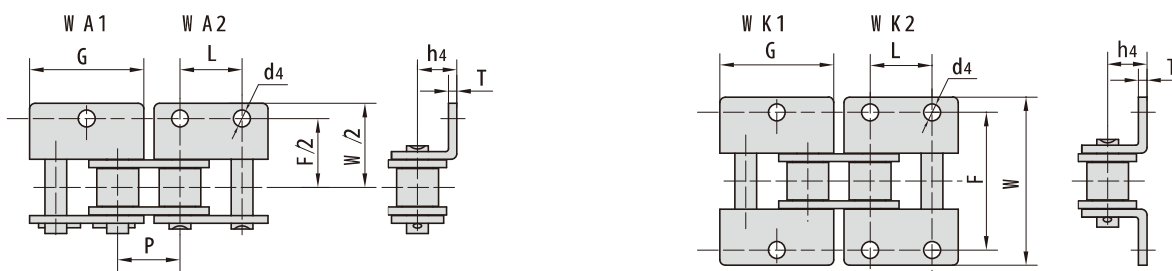


东华链号 Donghua Chain No.	P	G	L	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm
08BW K2F27	12.700	24.00	12.000	30.43	43.43	2.00	10.00	4.30
08BW K2F28	12.700	24.40	12.700	42.00	56.30	1.60	8.50	6.00
08BW K2F29	12.700	25.45	12.700	34.03	45.93	1.50	13.00	6.00
08BW K2F3	12.700	23.20	12.700	32.00	43.60	1.60	10.00	4.50
08BW K2F32	12.700	23.30	12.700	25.40	40.00	1.60	8.90	M 5
08BW K2F39	12.700	24.50	12.700	27.60	41.80	1.60	8.50	4.80
08BW K2F4	12.700	24.00	12.700	25.40	36.40	1.60	8.90	4.30
08BW K2F40	12.700	23.10	12.700	26.00	36.40	1.60	8.90	6.50×4.50
08BW K2F5	12.700	24.20	12.700	23.95	34.95	1.55	8.75	4.30
40W K2F2	12.700	24.00	12.700	25.40	34.70	1.50	8.30	3.18
41W A1F4	12.700	22.30	-	30.00	41.00	1.30	7.20	5.00
428HW K1	12.700	23.30	-	38.00	56.40	2.42	11.00	5.50
10A (W) A2F1	15.875	24.10	15.875	33.60	43.20	2.03	8.20	3.50
10AW A1F2	15.875	28.80	-	32.40	42.20	2.03	10.30	5.20
10AW A1F6	15.875	28.80	-	31.80	46.60	2.03	10.30	6.50
10AW A2F1	15.875	24.10	15.880	30.70	43.89	2.03	10.10	3.90
10AW K1F1	15.875	28.80	-	31.75	46.00	2.03	10.30	8.20
10AW K1F2	15.875	30.00	-	31.75	46.00	2.03	10.30	5.20
10BW A1F1	15.875	28.50	-	52.00	73.00	1.70	10.50	10.00×8.00
10BW A2F2	15.875	28.36	15.760	30.40	39.80	1.60	10.50	5.20
10BW K1F4	15.875	29.58	-	31.80	44.60	1.70	10.31	7.30×5.50
10BW K2F10	15.875	28.60	15.900	31.80	47.60	1.70	10.30	5.20
10BW K2F2	15.875	28.36	15.760	30.40	39.80	1.60	10.50	5.20
10BW K2F3	15.875	29.90	15.880	31.59	45.59	1.60	10.50	5.30
10BW K2F4	15.875	29.58	15.880	31.71	48.41	1.70	10.31	5.30
10BW K2F8	15.875	29.58	15.875	31.80	44.60	1.70	10.31	7.30×5.50
10BW K2F9	15.875	29.90	15.880	48.20	62.20	1.60	10.50	5.30
*C 12BW K2F12	19.050	35.00	19.050	37.20	58.00	1.85	11.00	6.60
12AF99	19.050	34.65	19.050	38.10	56.40	2.42	11.90	5.00

*直链板

*Straight side plates

短节距输送链附件


Short pitch conveyor chain attachments

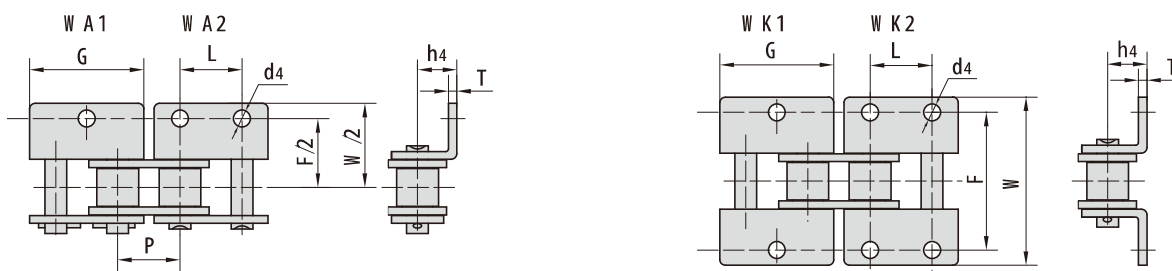

东华链号 Donghua Chain No.	P	G	L	F	W	T	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
12AHW A2F3	19.050	34.60	19.050	38.10	56.40	3.25	13.90	6.50
12AHW K2F1	19.050	34.65	19.050	40.60	59.00	3.25	11.90	5.50
12AW A1F5	19.050	34.65	—	38.10	54.40	2.42	11.90	7.00
12AW A1F6	19.050	34.65	—	44.00	62.00	2.42	11.90	10.50
12AW A1F8	19.050	36.00	—	38.10	58.20	2.42	11.90	5.00
12AW A1F9	19.050	34.65	—	38.10	54.40	2.42	11.90	6.50
12AW A2F1	19.050	34.65	19.050	38.20	56.60	2.42	11.90	6.35
12AW A2F10	19.050	34.65	19.050	47.00	62.00	2.42	11.90	8.50
12AW A2F13	19.050	34.65	19.050	38.10	56.40	2.42	11.90	M 6
12AW K1F32	19.050	34.65	—	38.10	54.40	2.42	11.90	6.00
12AW K2F5	19.050	34.65	14.300	38.10	54.40	2.42	11.90	6.00
12BF42W K2	19.050	34.90	19.000	35.20	54.60	1.85	12.20	6.40
12BW A1F13	19.050	34.65	—	35.00	51.60	1.85	13.46	7.00
12BW A1F2	19.050	34.05	—	38.10	26.20	1.85	13.46	—
12BW A2F1	19.050	34.80	19.050	35.20	61.40	1.85	12.00	5.50
12BW A2F10	19.050	34.05	19.050	38.90	56.90	1.85	13.46	7.00
12BW A2F11	19.050	32.00	19.050	38.10	56.40	1.85	11.90	5.50
12BW A2F17	19.050	37.00	19.050	38.08	52.38	1.85	13.46	6.40
12BW A2F18	19.050	34.05	19.050	38.10	52.40	1.85	18.50	6.40
12BW A2F19	19.050	37.20	19.050	35.50	56.90	1.85	12.00	6.20
12BW A2F2	19.050	34.90	19.000	35.00	50.60	1.85	12.00	6.20
12BW A2F20	19.050	35.05	19.000	35.20	50.40	1.85	12.20	6.40
12BW A2F21	19.050	34.90	19.000	35.20	54.60	1.85	12.20	6.40
12BW A2F22	19.050	34.05	19.050	37.30	56.00	1.85	11.90	6.50
12BW A2F3	19.050	30.00	20.000	37.40	53.00	1.85	12.00	6.10
12BW A2F5	19.050	30.00	20.000	39.60	55.30	1.85	14.00	M 6
12BW A2F6	19.050	30.00	20.000	38.60	57.00	1.85	13.46	6.20
12BW K0F1	19.050	30.00	—	—	55.30	3.00	14.00	5.50
12BW K1F1	19.050	34.05	—	38.10	52.40	1.85	13.46	8.50

短节距输送链附件

Short pitch conveyor chain attachments

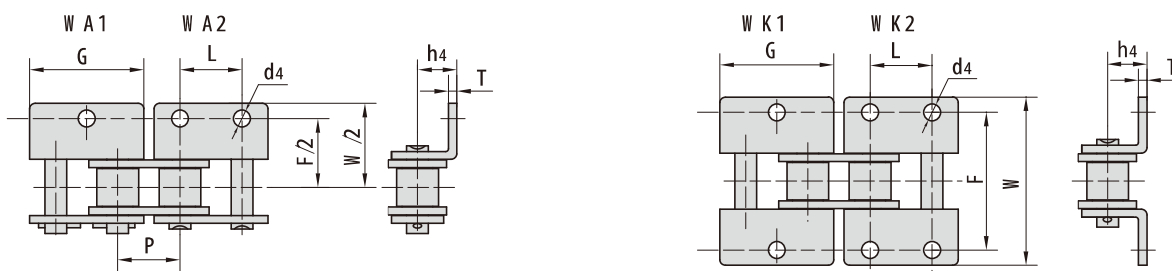


东华链号 Donghua Chain No.	P	G	L	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm
12BW K1F11	19.050	34.65	-	35.00	56.40	1.85	11.90	6.20
12BW K1F12	19.050	34.05	-	35.00	52.40	1.85	13.46	M 6
12BW K1F14	19.050	34.05	-	36.50	52.40	1.85	11.90	10.9×6.4
12BW K1F15	19.050	34.85	-	34.84	51.24	1.85	11.40	6.20
12BW K2F23	19.050	34.05	19.050	36.50	52.40	1.85	11.90	10.9×6.4
12BW K2F25	19.050	34.05	19.050	35.10	54.60	1.85	12.00	6.60
12BW K2F27	19.050	35.25	19.050	35.40	54.90	1.80	11.60	6.40
12BW K2F28	19.050	35.00	19.000	35.00	62.80	1.85	12.00	5.60
12BW K2F7	19.050	34.90	19.000	35.00	55.40	1.85	12.20	6.40
12BW K2F8	19.050	35.60	19.050	38.10	52.40	1.85	13.50	6.60
12BW K2F9	19.050	34.90	19.000	35.00	62.40	1.85	12.20	6.20
*C 16BW K2F24	25.400	46.40	25.400	50.80	72.60	3.10	15.88	8.00
16AA2F14	25.400	45.90	25.400	50.80	73.20	3.25	15.90	6.80
16AA2F18	25.400	45.90	19.050	50.80	77.50	3.25	14.125	6.70
16AA2F19	25.400	45.90	25.400	50.80	73.20	3.25	15.90	M 6
16AK2F13	25.400	45.90	25.400	50.81	73.21	3.25	15.90	11.00
16AW A2F16	25.400	45.90	25.400	50.80	73.20	3.25	15.90	8.00
16AW A2F9	25.400	45.90	19.100	50.80	73.20	3.25	15.90	9.00
16AW K0F1	25.400	45.90	-	-	82.80	3.25	15.90	-
16AW K1F1	25.400	45.90	-	50.80	73.20	3.25	15.90	8.00
16AW K1F2	25.400	45.90	-	50.80	73.20	3.25	15.90	12.00
16AW K1F7	25.400	45.90	-	50.80	73.20	3.25	15.90	9.00
16AW K2F10	25.400	45.90	25.400	50.80	73.20	3.25	15.90	8.20
16AW K2F17	25.400	45.90	25.400	50.80	73.20	3.25	15.90	6.60
16AW K2F8	25.400	45.90	25.400	50.80	73.20	3.25	15.90	8.50
16BW A1F28	25.400	36.00	-	57.58	77.58	3.10	16.00	M 8
16BW A2F12	25.400	46.40	25.400	50.80	77.80	3.10	15.90	8.20
16BW A2F21	25.400	45.50	25.000	54.80	83.80	3.10	16.00	M 6
16BW A2F22	25.400	46.40	25.400	50.80	72.60	3.10	15.88	9.00
16BW A2F30	25.400	45.40	25.000	53.00	92.00	3.10	15.88	7.00

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

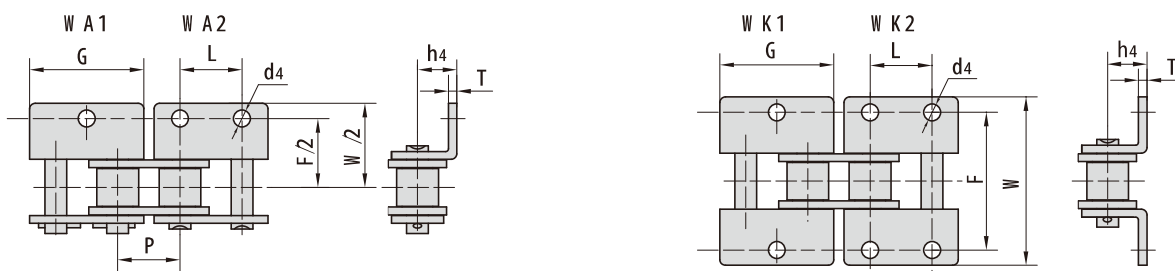



东华链号 Donghua Chain No.	P	G	L	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm
16BW A2F34	25.400	46.40	25.400	58.08	72.60	3.10	15.88	8.20
16BW A2F36	25.400	46.40	25.400	58.00	84.00	3.10	18.00	9.00
16BW A2F37	25.400	46.00	25.400	50.80	72.60	3.00	16.30	M 8
16BW A2F7	25.400	46.40	25.400	50.80	72.00	4.15	16.00	8.00
16BW K1F	25.400	46.00	-	57.20	78.50	3.10	15.90	8.10
16BW K1F21	25.400	45.50	-	70.00	90.00	3.10	15.00	11.00
16BW K1F25	25.400	46.40	-	58.62	83.12	3.10	17.50	M 6
16BW K1F26	25.400	45.50	-	70.00	90.00	3.10	15.00	11.40
16BW K1F27	25.400	46.00	-	57.20	78.50	3.10	15.90	6.50
16BW K1F3	25.400	46.40	-	50.80	72.60	3.10	15.88	M 6
16BW K1F31	25.400	46.40	25.400	54.40	72.80	3.10	16.00	12.6×9
16BW K1F35	25.400	46.40	-	50.80	72.60	3.10	15.88	8.80
16BW K1F36	25.400	46.40	-	54.40	72.80	3.10	16.00	12.6×9
16BW K1F4	25.400	46.40	-	50.74	72.50	3.10	15.88	8.30
16BW K1F5	25.400	45.00	-	70.00	91.00	4.50	15.00	10.50
16BW K2F1	25.400	48.00	25.400	58.00	75.90	3.10	18.00	9.00
16BW K2F10	25.400	46.40	25.400	52.00	72.60	3.10	15.88	6.40
16BW K2F13	25.400	47.00	25.400	58.00	75.60	4.15	18.00	9.00
16BW K2F23	25.400	46.40	25.400	58.00	84.00	3.10	19.00	8.50
16BW K2F28	25.400	46.40	25.400	50.88	75.12	3.10	15.50	7.00
16BW K2F3	25.400	46.40	25.400	58.08	72.60	3.10	15.88	8.20
16BW K2F31	25.400	46.40	25.400	54.40	72.80	3.10	16.11	12.6×9
16BW K2F32	25.400	46.40	25.400	58.00	76.00	3.10	18.00	9.30
16BW K2F33	25.400	46.40	25.400	50.80	72.60	3.10	15.88	8.20
16BW K2F38	25.400	46.40	25.400	58.12	78.12	3.10	15.90	8.40
16BW K2F39	25.400	46.00	25.400	50.80	79.40	3.10	15.90	6.80
16BW K2F5	25.400	46.00	25.400	53.58	77.58	3.00	16.30	8.20
16BW K2F6	25.400	49.00	25.400	50.20	72.60	4.00	19.00	8.20
16BW K2F8	25.400	46.40	25.400	50.80	79.40	4.15	15.88	6.60
*C 20BW K0F1	31.750	57.45	-	-	85.40	3.50	22.80	-

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

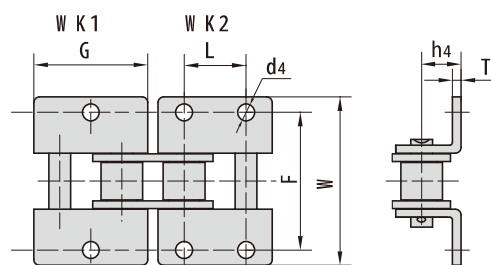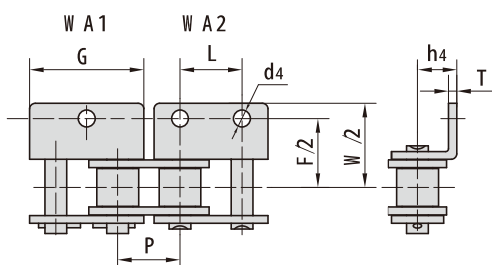


东华链号 Donghua Chain No.	P	G	L	F	W	T	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
20AH A2F2	31.750	57.65	31.750	65.60	91.70	4.80	19.80	9.20
20AW A2F4	31.750	57.65	31.750	63.60	89.70	4.00	19.80	6.40
20BW K1F1	31.750	58.15	-	69.00	98.80	3.50	21.00	10.50
20BW K2F1	31.750	58.10	31.750	67.94	100.54	3.50	19.80	9.00
20BW K2F2	31.750	60.00	31.750	68.00	88.00	3.50	23.50	9.60
20BW K2F3	31.750	60.00	31.750	68.00	88.00	3.50	23.60	9.60
24AK 2F1	38.100	69.30	38.100	76.20	109.00	4.80	23.00	10.20
24AK 2F2	38.100	69.30	38.100	76.20	108.80	4.80	23.00	10.80
24AK 2F4	38.100	69.30	38.100	76.20	95.00	4.80	23.00	9.80
24AK 2F6	38.100	69.30	38.100	76.20	108.80	4.80	23.00	11.11
24BW K2F2	38.100	71.30	38.100	80.00	118.10	4.80	26.70	10.50
28AF16W K2	44.450	82.00	44.450	70.00	98.00	5.60	24.80	11.40
28AK 2F6	44.450	80.45	42.000	69.50	107.20	5.60	28.00	10.50
28AW A2F5	44.450	80.45	44.450	88.90	123.00	5.60	28.60	20×12
28AW K2F1	44.450	82.00	42.000	69.50	99.00	5.60	25.10	10.50
28AW K2F4	44.450	82.00	42.000	69.50	99.00	6.00	25.10	11.20
*C 32AF41K2	50.800	88.80	50.800	90.00	118.00	6.40	31.80	11.00
32AW K2F3	50.800	100.00	70.000	100.00	140.00	6.40	31.75	18.00
32AW K2F46	50.800	92.80	42.000	95.00	149.00	6.40	25.00	13.10
32AW K2F50	50.800	92.00	42.000	91.00	126.00	6.40	31.75	16.50
32BF38	50.800	60.00	-	126.00	156.00	11.00	35.00	16.00
32BK 2F3	50.800	60.00	30.000	90.00	115.70	6.00	56.00	M 10
32BW A2F3	50.800	92.40	50.800	105.00	147.00	6.00	31.80	12.50
32BW K2F2	50.800	92.80	40.000	76.39	111.99	6.00	31.00	12.50
32BW K2F4	50.800	92.80	42.000	94.50	150.50	6.00	25.00	13.00
32BW K2F5	50.800	92.80	50.800	101.60	142.80	6.00	31.75	13.10
40AW K2F1	63.500	115.50	63.500	127.00	179.00	8.00	42.88	16.00
40BF7	63.500	110.00	66.000	126.20	176.00	8.00	35.00	16.00
40BF8W K2	63.500	116.50	63.500	124.71	177.71	8.00	42.90	17.00

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

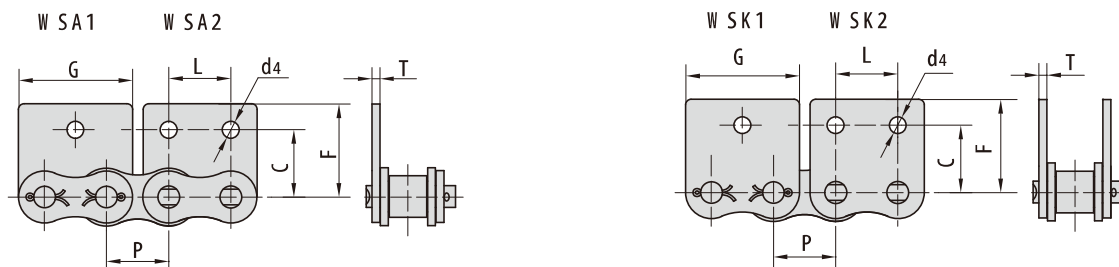


东华链号 Donghua Chain No.	P	G	L	C	F	T	d4
	mm	mm	mm	mm	mm	mm	mm
04BW SK2F1	6.000	10.50	6.000	7.00	11.00	0.60	2.20
05BW SA2F1	8.000	14.00	6.000	7.00	13.00	0.80	3.00
*06BW SA2F1	9.525	17.60	9.500	10.10	14.50	1.30	3.30
*06BW SK0F1	9.525	17.72	-	-	13.50	1.30	-
*06BW SK2F2	9.525	17.25	9.520	9.50	13.50	1.15	3.50
06CW SA2F1	9.525	17.53	9.530	8.50	14.70	1.30	4.20
06CW SA2F2	9.525	18.50	9.525	9.60	14.70	1.30	3.30
08AW SA2F1	12.700	23.00	12.700	17.47	20.65	1.50	3.60
08BW SA0F2	12.700	23.30	-	-	18.90	1.60	-
08BW SA0F4	12.700	23.20	-	-	16.00	1.60	-
08BW SA1F2	12.700	24.45	-	13.40	18.90	1.60	4.30
08BW SA2F11	12.700	23.30	12.700	13.35	18.90	1.60	4.00
08BW SA2F9	12.700	23.30	12.700	19.50	25.00	1.60	4.30
08BW SK2F1	12.700	23.30	12.700	13.35	18.90	1.60	6.10
08BW SK2F13	12.700	23.05	12.700	14.10	19.20	1.60	4.30
08BW SK2F2	12.700	24.45	12.700	13.40	18.90	1.60	4.30
08BW SK2F3	12.700	24.20	12.700	14.10	19.50	1.55	4.30
08BW SK2F4	12.700	23.30	12.700	14.10	18.50	1.60	4.30
08BW SK2F8	12.700	23.30	12.700	13.35	18.90	1.60	5.00
*C 10BW SK0F1	15.875	29.58	-	-	22.95	1.70	-
10AW SA0F5	15.875	30.30	-	-	24.10	2.03	-
10AW SA0F6	15.875	28.90	-	-	19.70	2.03	-
10AW SA1F1	15.875	30.88	-	17.50	33.50	2.03	6.00
10AW SK2F1	15.875	28.45	15.900	17.30	26.90	2.03	5.00
10BSK2F5	15.875	29.90	15.880	16.32	23.32	1.60	5.30
10BW SK2F6	15.875	28.60	15.900	15.90	23.70	1.70	5.20
*C 12AW SA1F1	19.050	34.05	-	17.60	25.80	2.42	9.00
*C 12BW SK0F7	19.050	34.05	-	-	22.00	1.85	-
12AW SA0F1	19.050	37.05	-	-	24.00	2.42	-
12AW SA0F2	19.050	34.65	-	-	26.86	2.42	-
12AW SA2F2	19.050	34.65	19.050	17.57	26.80	2.42	5.50
12AW SK1F2	19.050	34.65	-	15.75	33.53	2.42	16.13
12AW SK2F1	19.050	34.65	19.050	18.30	26.86	2.42	9.00
12BSK1F6	19.050	18.00	-	18.20	28.10	1.80	6.40
12BSK2F1	19.050	34.05	19.050	18.20	28.60	1.85	6.40
12BW SK0F10	19.050	34.05	-	-	15.00	1.85	-
12BW SK0F8	19.050	34.05	-	-	12.00	1.85	-

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

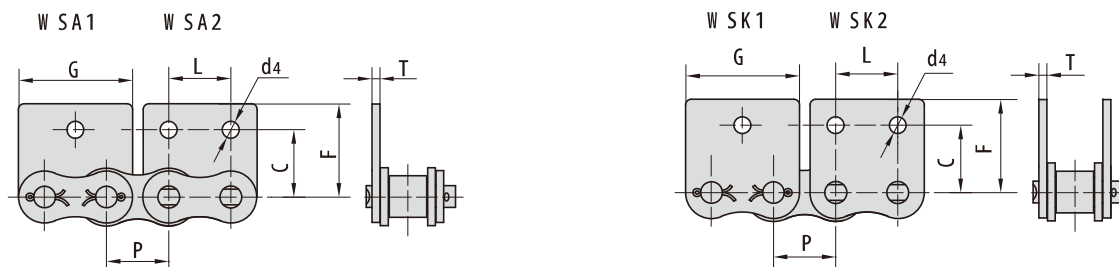


东华链号 Donghua Chain No.	P	G	L	C	F	T	d4
	mm	mm	mm	mm	mm	mm	mm
12BW SK1F1	19.050	35.20	—	20.58	30.30	1.85	6.35
12BW SK2F2	19.050	34.90	19.000	17.80	25.90	1.85	6.20
12BW SK2F3	19.050	34.90	19.000	17.80	25.90	1.85	5.50
12BW SK2F4	19.050	37.20	19.000	18.30	29.00	1.85	6.20
12BW SK2F5	19.050	34.05	19.050	19.00	30.50	1.85	5.72
12BW SK2F6	19.050	34.90	19.000	17.90	32.00	1.85	5.60
*C 16BSK0F4	25.400	35.00	—	—	25.00	3.00	—
*C 16BW SK0F1	25.400	46.40	—	—	24.00	3.10	—
*C 16BW SK0F6	25.400	25.00	—	—	25.00	3.10	—
16AW SK1F3	25.400	45.90	—	16.00	34.40	3.25	14.52
16AW SK1F4	25.400	45.90	—	16.00	34.40	3.25	15.56
16AW SK1F5	25.400	45.90	—	16.00	34.40	3.25	17.15
16AW SK1F6	25.400	45.90	—	16.00	34.40	3.25	16.00
16AW SK2F1	25.400	45.90	19.100	24.60	35.45	3.25	9.00
16BF95	25.400	46.40	25.400	27.50	40.00	3.10	8.28
16BW SA2F6	25.400	49.00	25.400	25.50	37.60	4.00	8.20
16BW SK0F9	25.400	46.40	—	—	24.00	4.15	—
16BW SK1F8	25.400	47.00	25.400	31.10	39.70	4.15	9.00
16BW SK2F10	25.400	46.50	25.400	28.60	41.50	3.10	9.00
16BW SK2F15	25.400	46.40	25.400	23.15	34.00	3.10	6.40
16BW SK2F16	25.400	45.85	25.400	26.00	36.75	3.10	6.80
16BW SK2F5	25.400	46.00	25.400	25.40	37.50	3.00	8.20
16BW SK2F7	25.400	47.00	25.400	31.10	39.70	3.10	6.60
16BW SK2F8	25.400	46.40	—	25.00	37.00	3.10	8.20
16BW SK2F9	25.400	47.00	25.400	31.10	39.70	4.15	9.00
20AW SK1F2	31.750	57.65	—	31.80	44.00	4.00	16.00
20AW SK1F3	31.750	57.65	—	31.80	34.98	4.00	16.00
20BW SK2F2	31.750	58.10	31.750	35.00	50.00	3.50	9.00
20BW SK2F3	31.750	52.00	32.000	26.00	36.00	4.50	9.00
24AW SK2F1	38.100	69.30	38.100	34.40	50.70	4.80	9.80
24BW SK2F1	38.100	71.30	38.100	45.00	55.60	4.80	10.50
24BW SK2F3	38.100	71.30	38.100	41.00	60.00	4.80	11.00
140HW SK0F1	44.450	80.48	—	—	43.00	5.00	—
28AW SK2F2	44.450	80.45	44.450	44.20	61.25	5.60	11.40
32AF5	50.800	93.00	50.800	38.10	56.65	6.40	13.50
32AW SK2F1	50.800	92.00	50.800	100.00	150.00	6.40	13.10
40AW SK2F1	63.500	115.60	63.500	63.50	89.00	8.00	17.00

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

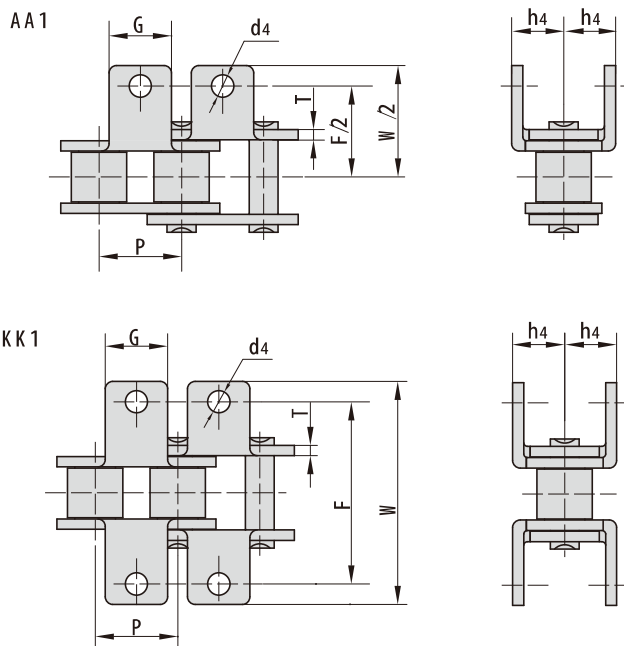


ISO 链号 ISO Chain No.	东华链号 Donghua Chain No.	P	G	F	W	T	h4	d4
		mm	mm	mm	mm	mm	mm	mm
40	08A	12.700	9.5	25.40	35.2	1.50	7.90	3.4
50	10A	15.875	12.7	31.75	46.2	2.03	10.30	5.5
60	12A	19.050	15.9	38.10	55.6	2.42	11.90	5.5
80	16A	25.400	19.1	50.80	64.8	3.25	15.90	6.8
100	20A	31.750	25.4	63.50	87.3	4.00	19.80	9.2
120	24A	38.100	28.6	76.20	108.5	4.80	23.00	9.8
*06B	*06B	9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B	08B	12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B	10B	15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B	12B	19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B	16B	25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B	20B	31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B	24B	38.100	30.0	76.20	108.4	4.80	26.67	10.5
	08AA1F9	12.700	9.6	55.40	62.5	2.03	7.50	4.2
	08AA1F10	12.700	9.6	28.00	36.4	1.50	8.50	3.2
	08AA1F11	12.700	9.5	25.40	35.2	1.50	7.90	5.5
	08AA1F12	12.700	9.5	25.40	35.2	1.50	7.90	3.2
	08AKK1F1	12.700	9.5	25.40	36.4	1.50	8.90	4.5
	80HAA1F1	25.400	20.0	62.00	79.6	3.24	35.60	8.1
	24BAA1F2	38.100	35.0	83.80	103.8	6.00	36.15	10.0
	28BKK1F2	44.450	35.0	117.00	147.0	6.00	22.50	12.0

*直链板
*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

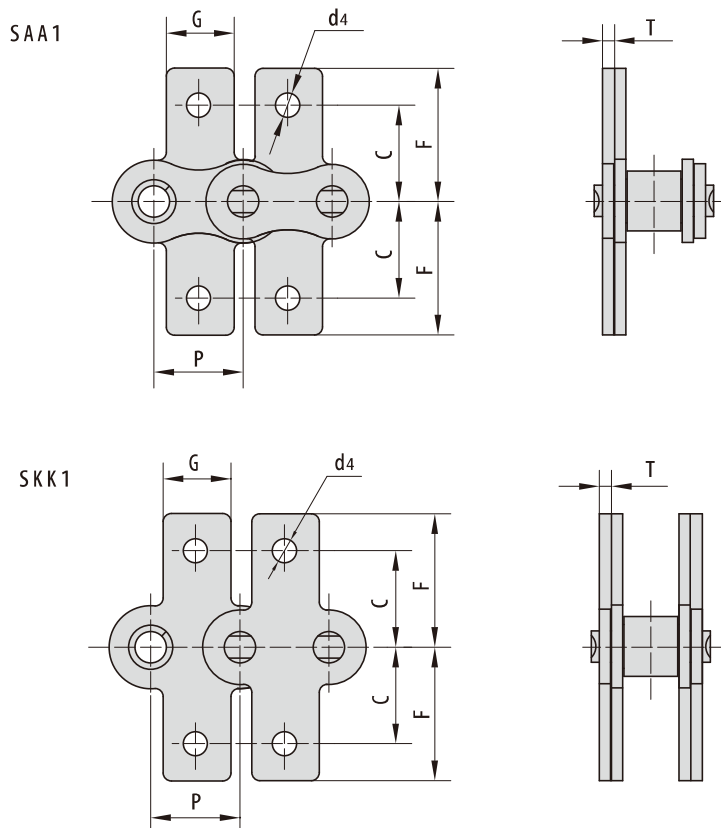

ISO 链号 ISO Chain No.	东华链号 Donghua Chain No.	P	G	C	F	T	d4
		mm	mm	mm	mm	mm	mm
40	08A	12.700	9.5	12.70	19.05	1.50	3.4
50	10A	15.875	12.7	15.90	25.25	2.03	5.5
60	12A	19.050	15.9	18.30	29.33	2.42	5.5
80	16A	25.400	19.1	24.60	34.70	3.25	6.8
100	20A	31.750	25.4	31.80	43.30	4.00	9.2
120	24A	38.100	28.6	73.00	103.20	4.80	9.8
*06B	*06B	9.525	8.0	9.52	13.50	1.30	3.5
08B	08B	12.700	9.5	13.35	18.90	1.60	4.3
10B	10B	15.875	14.3	16.50	22.95	1.70	5.3
12B	12B	19.050	16.0	21.45	28.60	1.85	6.4
16B	16B	25.400	19.1	23.15	34.00	3.10	6.4
20B	20B	31.750	35.0	30.50	45.70	3.50	9.0
24B	24B	38.100	36.0	85.40	123.0	4.80	10.5
	41F12	12.700	9.5	-	17.35	1.30	-
	12ASAA1F1	19.050	15.9	19.90	26.00	2.42	5.5

*直链板
*Straight side plates

A系列输送链特殊附件





Conveyor chain special attachments (A series)

东华链号 Donghua Chain No.	P	A	B	h ₁	h	H
	mm	mm	mm	mm	mm	mm
06CF2	9.525	6.50	8.00	5.20	20.50	24.15
06CF7	9.525	6.50	8.00	4.10	20.00	24.45
06CF9	9.525	6.50	8.00	4.10	20.00	24.45
06CF20	9.525	6.50	8.00	5.20	20.50	24.15
06CF23	9.525	6.50	8.00	5.20	20.50	24.15
06CF25	9.525	6.50	8.00	5.20	20.50	24.15
06CF34-2STC	9.525	7.00	8.20	3.60	16.40	23.80
06CF50	9.525	6.50	8.00	5.50	20.00	24.10

东华链号 Donghua Chain No.	P	A	B	C	h ₁	h	H
	mm	mm	mm	mm	mm	mm	mm
06CF5	9.525	4.3	2.0	16.9	5.3	16.0	20.0
06CF8	9.525	4.3	2.0	16.9	5.3	20.0	24.0
06CF46	9.525	4.8	1.6	17.6	4.8	16.0	20.0

东华链号 Donghua Chain No.	P	A	C	h ₁	h	H
	mm	mm	mm	mm	mm	mm
06CF6	9.525	3.25	17.5	5.25	16.00	20.00


东华链号 Donghua Chain No.	P	L	A	B	H
	mm	mm	mm	mm	mm
RS40F1	12.7	23.6	7.32	16.1	13.3

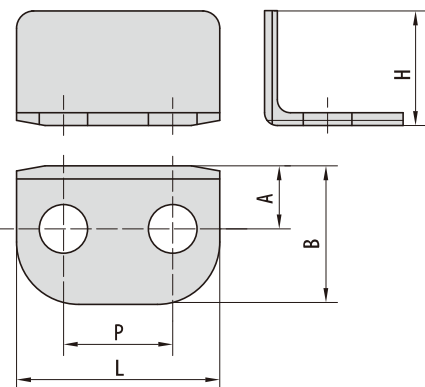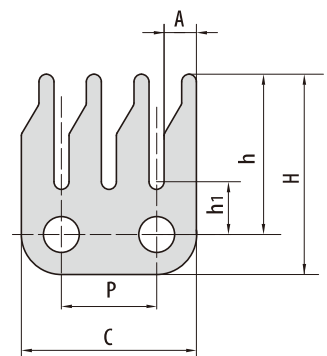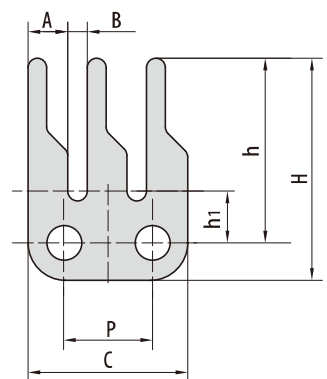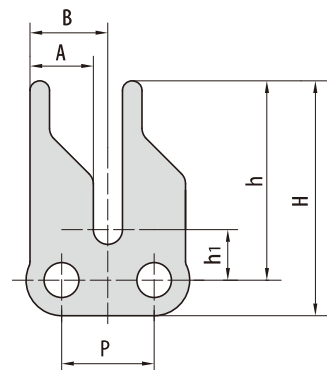


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	A	B	L	h	H	d ₃	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
08AF7	12.7	31.34	25.48	17.45	12.7	15.88	3.30	4.95

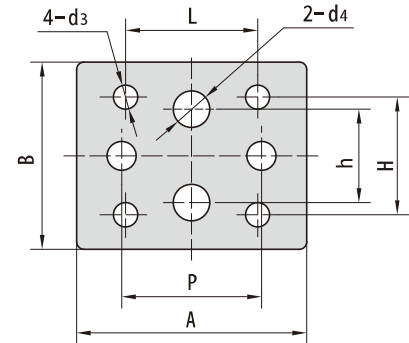


东华链号 Donghua Chain No.	P	A	B	C	h ₄
	mm	mm	mm	mm	mm
08AF9-2	12.7	23.00	28.80	16.00	10.00

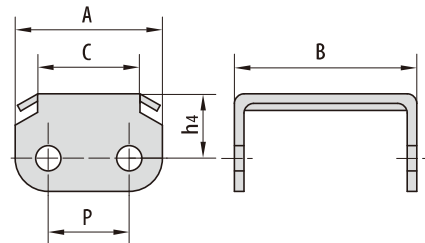

东华链号 Donghua Chain No.	P	b ₁	C	G	H	h	W	T
	mm	mm	mm	mm	mm	mm	mm	mm
08A-U1F1	12.7	7.85	16.50	24.50	17.4	7.0	27.4	1.60

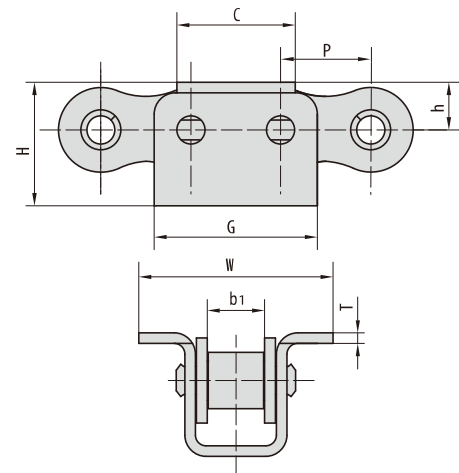


东华链号 Donghua Chain No.	P	b ₁	G ₁	G ₂	F	W	C	h
	mm	mm	mm	mm	mm	mm	mm	mm
08ASAF1	12.7	7.85	9.50	25.0	19.05	35.0	21.5	22.0
08ASAF3	12.7	7.85	9.53	25.0	17.45	35.0	21.5	22.0

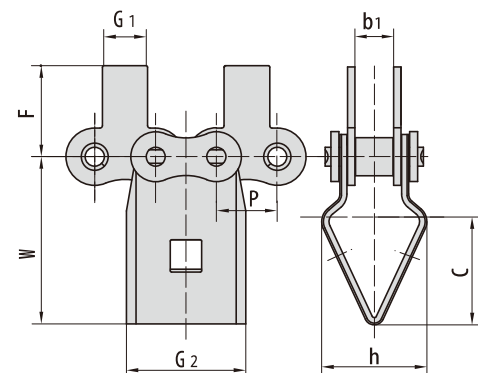


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	G	H	h ₂
	mm	mm	mm	mm
12ASA	19.05	10.00	204.00	18.00




东华链号 Donghua Chain No.	P	G	A	R ₁	R ₂
	mm	mm	mm	mm	mm
12AF7	19.05	15.50	1.47	7.80	26.50



东华链号 Donghua Chain No.	P	G	F	W	h ₃	h ₄
	mm	mm	mm	mm	mm	mm
10AF12	15.875	7.00	14.55	21.20	7.80	8.50

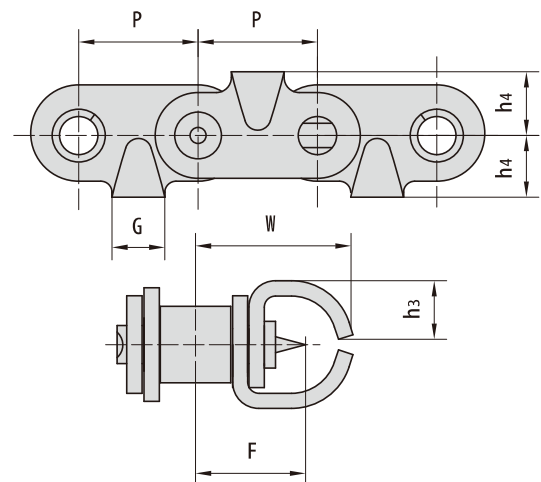


东华链号 Donghua Chain No.	P	A	G	h ₁	h ₄	H	d ₄
	mm	mm	mm	mm	mm	mm	mm
12AF8	19.05	12.0	37.05	-	12.0	26.50	-
12AF17	19.05	20.0	34.65	20.69	11.9	29.48	8.0

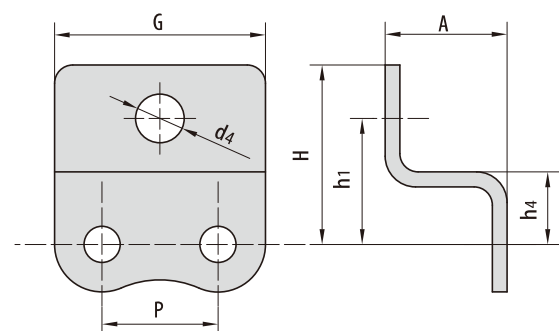


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
C 60TS	19.05	14.10	22.30	35.45




东华链号 Donghua Chain No.	P	L	h ₁	h	H	d ₄
	mm	mm	mm	mm	mm	mm
16AF6	25.40	47.63	7.92	21.44	34.93	4.98

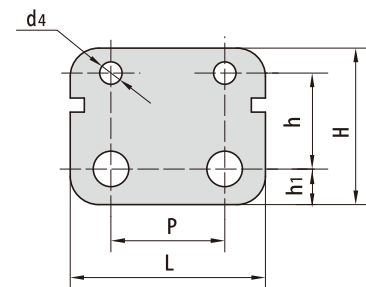


东华链号 Donghua Chain No.	P	h	H	A	S
	mm	mm	mm	mm	mm
16AF8	25.40	11.20	40.20	29.20	3.10

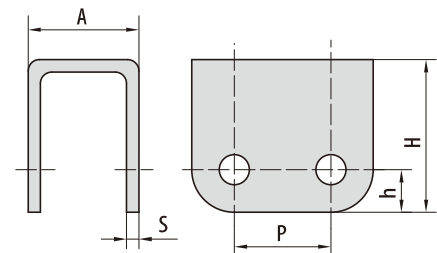

东华链号 Donghua Chain No.	P	d ₄	R ₁	R ₂
	mm	mm	mm	mm
16AF13	76.20	45.00	11.90	31.00




东华链号 Donghua Chain No.	P	h	H	α
	mm	mm	mm	
20AF2	31.75	12.50	51.00	74°




A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	G	C ₁	C ₂	C ₃	d ₄	α
	mm	mm	mm	mm	mm	mm	
20ASK1F1	31.75	25.4	23.0	30.0	40.0	8.70	75°




东华链号 Donghua Chain No.	P	H	h ₂	α
	mm	mm	mm	
41F5	12.70	23.90	8.51	14°




东华链号 Donghua Chain No.	P	H	h ₂	L	α
	mm	mm	mm	mm	
10ASA0F1	15.875	38.50	13.00	29.50	30°



东华链号 Donghua Chain No.	P	H	h	G	A
	mm	mm	mm	mm	mm
16AF21	25.40	24.00	20.10	49.40	28.10




东华链号 Donghua Chain No.	P	H	h	α
	mm	mm	mm	
12AHF27	19.05	30.20	15.60	70°




A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
12AHF30	19.05	47.20	15.60	10.00

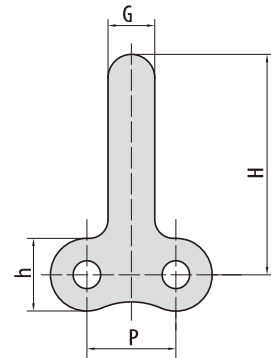


东华链号 Donghua Chain No.	P	H	h	A	G
	mm	mm	mm	mm	mm
10AF25	15.875	25.40	15.00	6.35	12.70



东华链号 Donghua Chain No.	P	H	h	A	G
	mm	mm	mm	mm	mm
10AF17	15.875	25.00	10.30	27.80	28.88

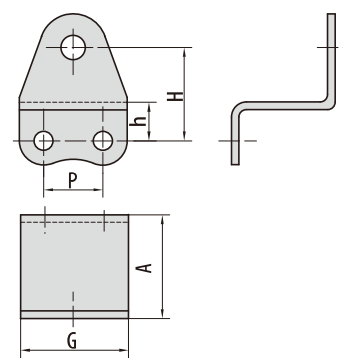


东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
12AF44	19.05	55.00	15.60	36.85

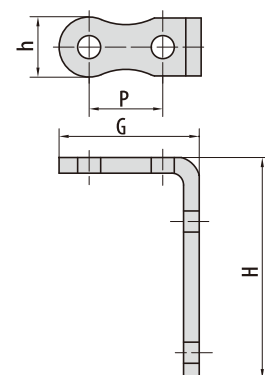


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	H	G	α
	mm	mm	mm	
20AF21	31.75	49.46	61.50	22°




东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
20AF18	63.50	40.00	15.00	93.00



东华链号 Donghua Chain No.	P	h2	H	A	B
	mm	mm	mm	mm	mm
05BF1	8.00	7.10	16.00	5.00	12.00




东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
05BF3	8.00	17.55	14.00	4.00

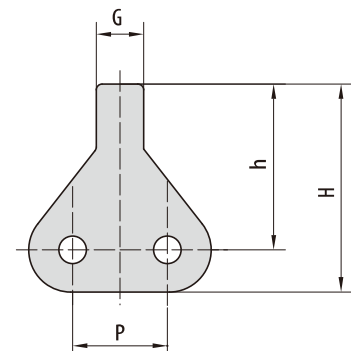


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	b ₁	G ₁	G ₂	F	W	C	h
	mm	mm	mm	mm	mm	mm	mm	mm
08ASA F2	12.70	7.85	14.00	24.70	11.00	35.00	21.00	21.80

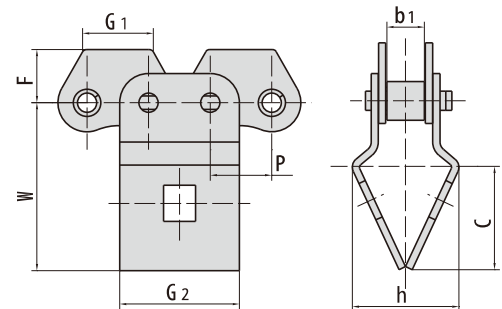


东华链号 Donghua Chain No.	P	G	C	F	d ₄
	mm	mm	mm	mm	mm
06CSA 1F2	9.525	12.80	18.00	22.50	M 4



东华链号 Donghua Chain No.	P	G	A	B	h	h ₁	h ₂	H
	mm	mm	mm	mm	mm	mm	mm	mm
06CF47	9.525	12.20	4.00	4.00	10.60	12.00	18.50	22.00

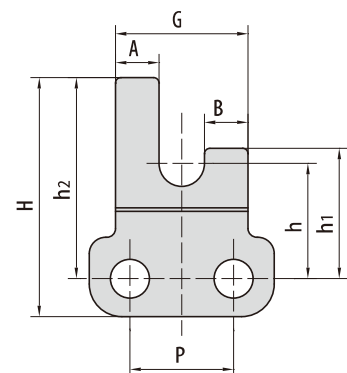


东华链号 Donghua Chain No.	P	G	A	B	h	h ₁	H
	mm	mm	mm	mm	mm	mm	mm
06CF45	9.525	17.20	6.20	6.20	10.20	16.20	23.20

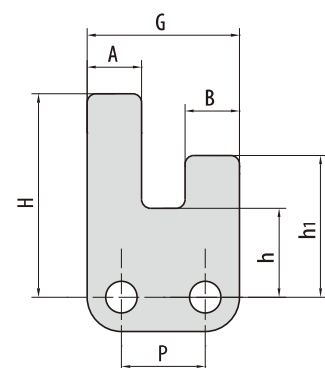


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	h ₂	A	B	C	h	h ₁	H	α
	mm	mm	mm	mm	mm	mm	mm	mm	
06CF27	9.525	7.80	6.26	2.00	6.50	3.00	14.00	20.00	45°
06CF44	9.525	9.00	5.80	2.70	7.50	3.50	13.80	20.00	45°




东华链号 Donghua Chain No.	P	G	A	B	C	h	h ₁	H	α
	mm	mm	mm	mm	mm	mm	mm	mm	
06CF28	9.525	16.10	6.65	8.05	2.80	11.90	3.10	15.70	90°




东华链号 Donghua Chain No.	P	A	C	h ₁	h	H
	mm	mm	mm	mm	mm	mm
06CF15	9.525	2.50	17.70	5.05	15.90	20.00



东华链号 Donghua Chain No.	P	G	L	h	H	H ₁	d ₃
	mm	mm	mm	mm	mm	mm	mm
C 50SA2F1	15.875	22.23	9.53	24.46	30.81	4.06	3.60
C 50SA2F2	15.875	22.20	9.50	24.70	30.20	4.06	3.60

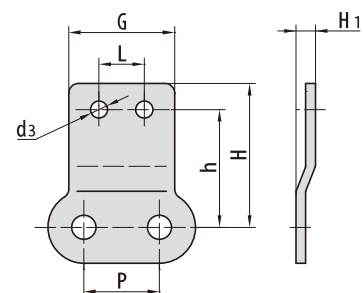


东华链号 Donghua Chain No.	P	G	h	H	d ₃
	mm	mm	mm	mm	mm
10AW A1F4	15.875	30.50	23.50	40.50	25.00




A系列输送链特殊附件

Conveyor chain special attachments (A series)

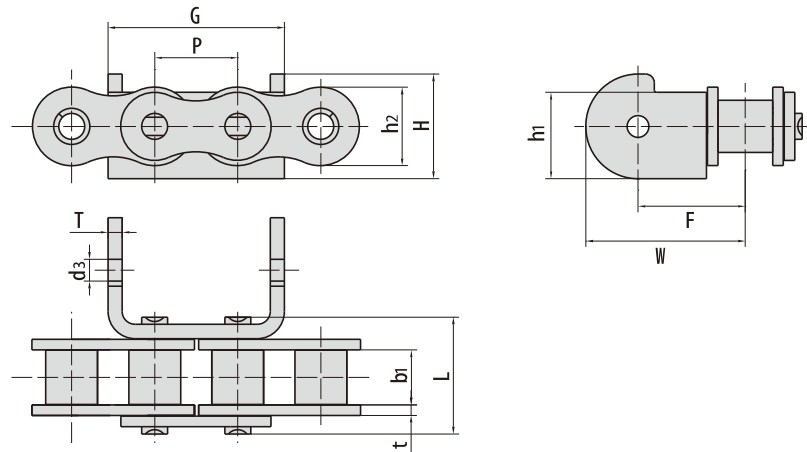


东华链号 Donghua Chain No.	P	b ₁	L	G	d ₃	F	W	H	h ₁	h ₂	t	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
12AAA1F1	19.05	12.57	28.60	40.50	8.00/6.00	24.70	36.70	24.00	—	18.00	2.42	3.25
12AAA1F2	19.05	12.57	28.60	40.50	8.00/6.00	24.70	36.70	24.00	19.80	18.00	2.42	3.25
12AAA1F3	19.05	12.57	28.60	40.50	6.00	24.70	36.70	24.00	19.80	18.00	2.42	3.25

东华链号 Donghua Chain No.	P	b ₁	G	h	W	T
	mm	mm	mm	mm	mm	mm
12AK0F1	19.05	12.57	15.90	20.28	10.42	2.42
20BSK0F1	31.75	19.56	35.00	39.32	16.80	3.50

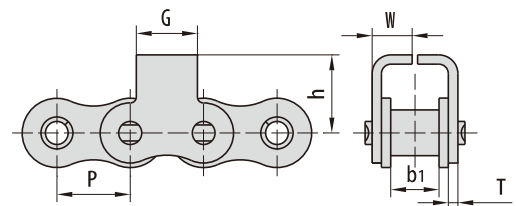


东华链号 Donghua Chain No.	P	h ₄	G	h	H	T	d ₄	α
	mm	mm	mm	mm	mm	mm	mm	°
16AHA1F2	25.40	14.80	20.00	45.10	55.10	4.00	7.00	13°

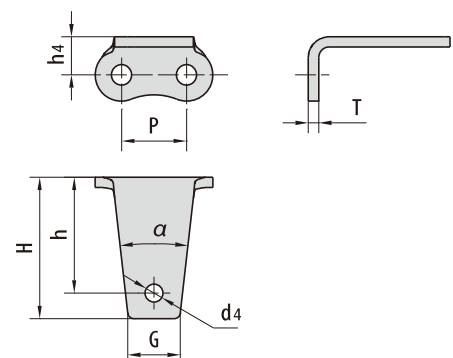


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	h ₄	G	A	B	C	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm
08BA2F41	12.70	8.90	10.00	8.40	10.00	24.00	4.20	1.60
16AA2F1	25.40	15.90	32.00	25.00	20.75	58.25	9.00	3.25

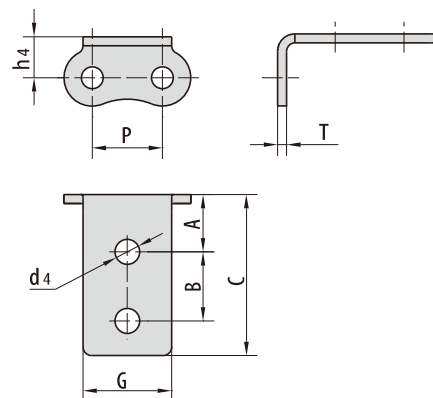


东华链号 Donghua Chain No.	P	A	B	C	L	G	d ₄
	mm	mm	mm	mm	mm	mm	mm
20ASK4F1	31.75	45.20	90.00	155.20	30.00	57.65	9.00

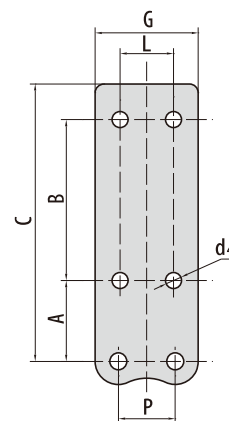

东华链号 Donghua Chain No.	P	L	G	h	h ₁	H	d ₄	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm
32AF47SA3	50.80	50.80	92.00	56.00	85.00	115.00	18.00	12.50




东华链号 Donghua Chain No.	P	G	h	H
	mm	mm	mm	mm
10AF72	15.875	56.00	16.10	44.00
10AF73	15.875	43.00	30.30	44.00




A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	G	L	h ₄
	mm	mm	mm	mm
10AF70	15.875	31.00	18.70	13.20

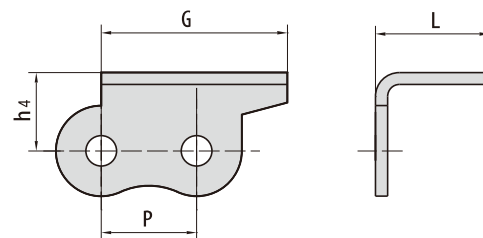


东华链号 Donghua Chain No.	P	H	h	α	β
	mm	mm	mm		
10AF60	15.875	37.50	31.00	30°	75°

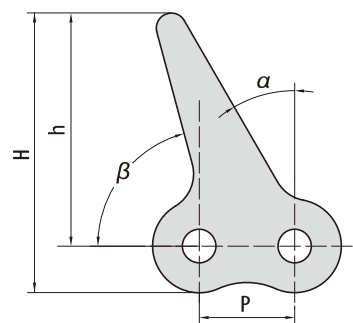

东华链号 Donghua Chain No.	P	G	H	h	h ₁	H ₂
	mm	mm	mm	mm	mm	mm
10AF67	15.875	27.00	40.30	23.00	33.80	5.03

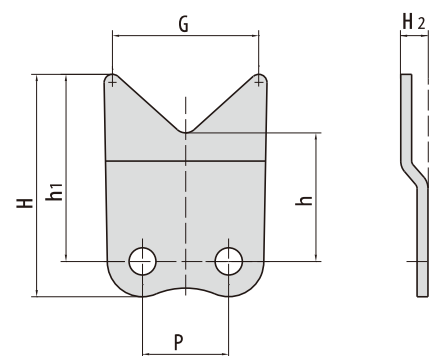


东华链号 Donghua Chain No.	P	G	C	H	h	h ₁
	mm	mm	mm	mm	mm	mm
10AF65	15.875	30.00	4.90	41.00	18.00	34.50
10AF66	15.875	30.00	4.90	41.00	23.70	34.50

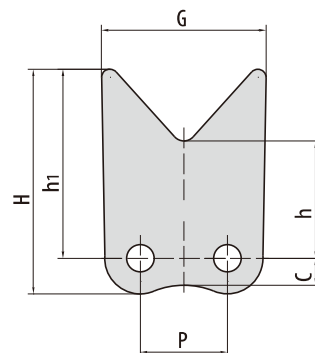


A系列输送链特殊附件

Conveyor chain special attachments (A series)


东华链号 Donghua Chain No.	P	C	F	H	H ₂	d ₃
	mm	mm	mm	mm	mm	mm
12AF117	19.05	40.00	50.00	57.35	12.61	6.30




东华链号 Donghua Chain No.	P	B	h ₁	h ₂	α
	mm	mm	mm	mm	
20AHF42	31.75	10.00	30.00	30.00	52°




东华链号 Donghua Chain No.	P	C	C ₁	C ₂	F	G	d ₄
	mm	mm	mm	mm	mm	mm	mm
20AF39-G 1	31.75	45.00	30.00	30.00	125.00	57.65	13.00



东华链号 Donghua Chain No.	P	G	G ₁	A	C	C ₁	H	α
	mm	mm	mm	mm	mm	mm	mm	
32AF45	50.80	98.80	12.00	16.00	18.00	60.00	37.00	30°



东华链号 Donghua Chain No.	P	h ₂	C	F	d ₄
	mm	mm	mm	mm	mm
40ASA1F1	62.50	52.00	30.00	47.80	14.50

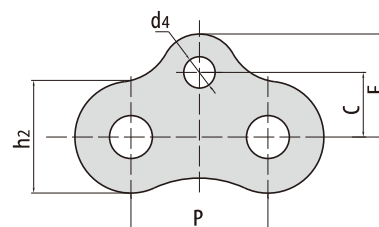

B系列输送链特殊附件

Conveyor chain special attachments (B series)






东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
05BF4	8.0	12.7	9.7	2.5

东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
05BF6	8.0	17.55	16.95	21.0

东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
08B-D53	12.7	20.0	10.6	11.5

东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
08BSK0F2	12.70	17.0	11.1	17.0
C12BF74	19.05	20.0	12.0	23.0

东华链号 Donghua Chain No.	P	H	h	G	L
	mm	mm	mm	mm	mm
08BF61	12.7	25.4	9.9	14.3	24.3

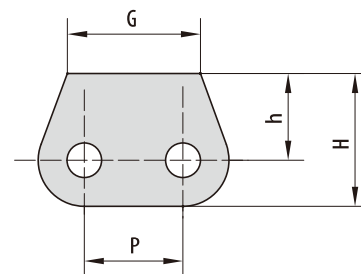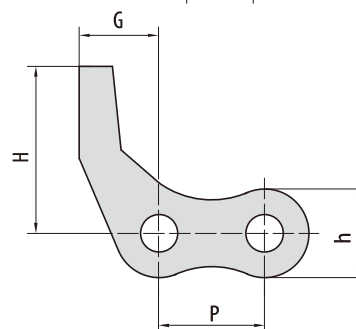






B系列输送链特殊附件 Conveyor chain special attachments (B series)

东华链号 Donghua Chain No.	P	R	h	α	β
	mm	mm	mm		
08BF24	12.70	6.20	31.00	30°	75°

东华链号 Donghua Chain No.	P	G	C	F	h	d4
	mm	mm	mm	mm	mm	mm
08BSA1F18	12.70	14.00	11.70	11.70	5.30	4.10


东华链号 Donghua Chain No.	P	h4	L	G	h	H	d4	d5	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm
08BA3F1	12.70	7.80	17.50	22.70	10.90	17.80	2.90	6.70	1.60
08BA3F2	12.70	8.00	17.50	24.60	10.60	17.80	2.50	16.60	1.60
12BW A3F3	19.05	11.50	19.05	34.90	10.00	17.30	2.80	6.70	1.85
12BW A3F4	19.05	12.20	17.40	34.05	11.30	18.00	2.80	6.30	1.85

东华链号 Donghua Chain No.	P	H	h	G	L	α
	mm	mm	mm	mm	mm	
08BF169	12.70	22.70	11.70	28.10	35.40	25°
08BF207	12.70	22.70	11.70	28.60	34.70	27°

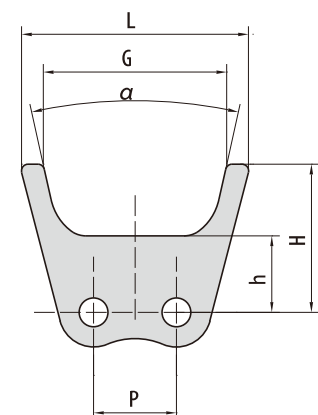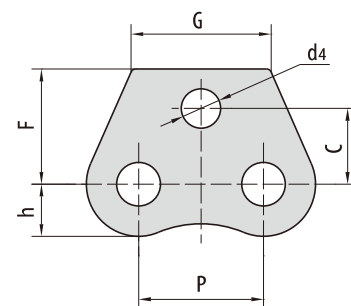


B系列输送链特殊附件 Conveyor chain special attachments (B series)


东华链号 Donghua Chain No.	P	h	A
	mm	mm	mm
C 72BF3SK0	114.30	151.80	30.00




东华链号 Donghua Chain No.	P	h	H	d4
	mm	mm	mm	mm
16BF121NP	25.40	25.50	36.10	8.00




东华链号 Donghua Chain No.	P	L1	G	h	H	d4
	mm	mm	mm	mm	mm	mm
16BF120	25.40	16.50	45.70	19.90	26.50	5.05
20BF47	31.75	21.17	61.71	25.00	33.00	10.19

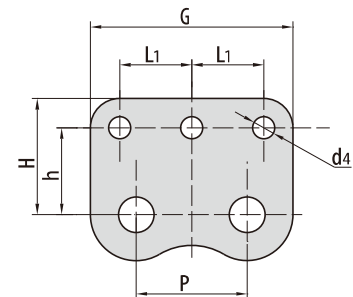

东华链号 Donghua Chain No.	P	h	H	G	A	d4
	mm	mm	mm	mm	mm	mm
16BF109	49.70	47.50	64.50	32.70	32.50	6.00

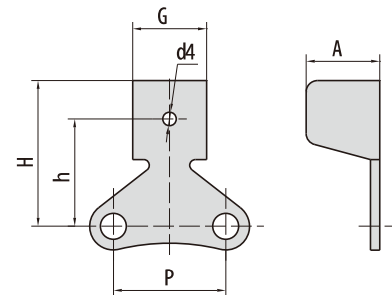


东华链号 Donghua Chain No.	P	G	A	h
	mm	mm	mm	mm
C 20BF51	31.75	21.75	10.00	40.00




B系列输送链特殊附件 Conveyor chain special attachments (B series)


东华链号 Donghua Chain No.	P	G	h	H
	mm	mm	mm	mm
20BF46	31.75	78.00	35.00	50.00




东华链号 Donghua Chain No.	P	G	h
	mm	mm	mm
C 20BF41	31.75	20.00	53.20




东华链号 Donghua Chain No.	P	h ₁	h	G
	mm	mm	mm	mm
08BF37	12.70	5.00	11.80	20.00



东华链号 Donghua Chain No.	P	h	H	A	B	d ₃	d ₄
	mm	mm	mm	mm	mm	mm	mm
12B-K 188	19.05	14.00	26.70	35.00	25.00	18.00	4.30

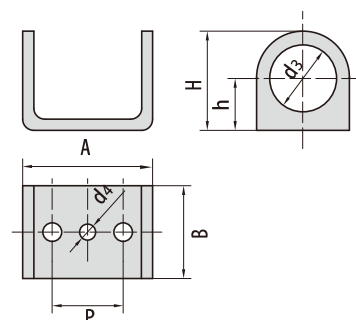


东华链号 Donghua Chain No.	P	h ₂	H	A	B	d ₄	L
	mm	mm	mm	mm	mm	mm	mm
16BF11	25.40	47.50	64.50	36.00	35.00	6.00	52.70
20BF2	31.75	-	70.00	43.00	35.00	-	65.15

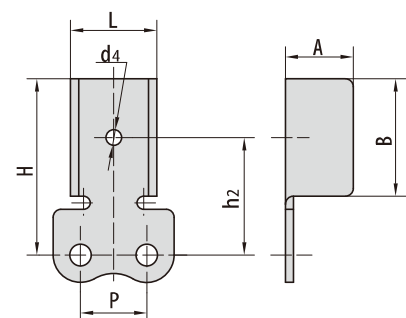

短节距加长销输送链


Short pitch conveyor chains with extended pins

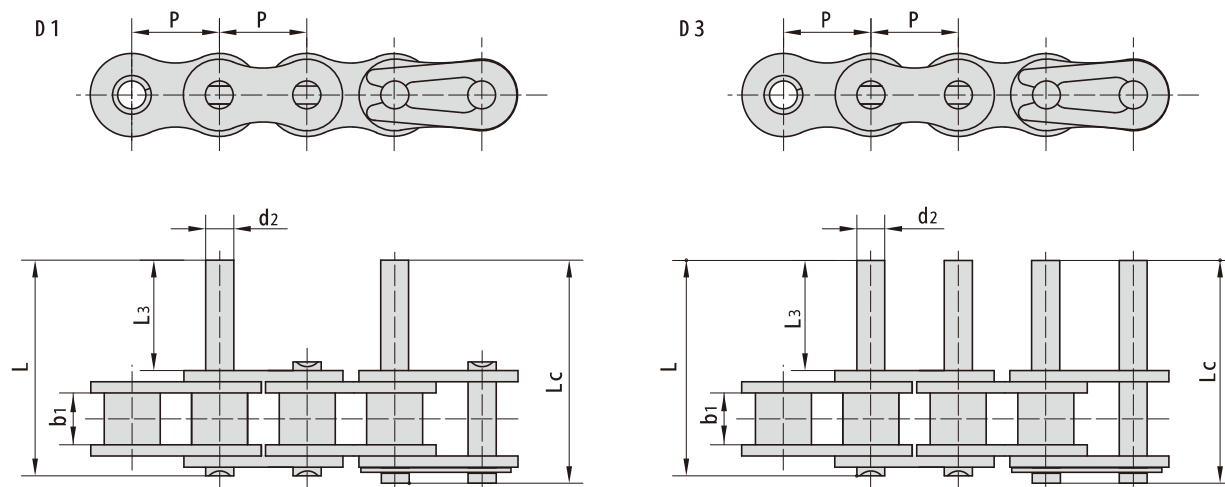

ISO 链号 ISO Chain No.	DIN 链号 DIN Chain No.	P	b ₁	d ₂	L ₃	L	L _c
		mm	mm	mm	mm	mm	mm
35	06C	9.525	4.77	3.58	9.5	20.8	21.6
40	08A	12.700	7.85	3.96	9.5	25.1	26.2
50	10A	15.875	9.40	5.08	11.9	31.3	33.1
60	12A	19.050	12.57	5.94	14.3	38.6	40.6
80	16A	25.400	15.75	7.92	19.1	50.3	53.3
100	20A	31.750	18.90	9.53	23.8	61.8	66.1
120	24A	38.100	25.22	11.10	28.6	76.4	80.4
140	28A	44.450	25.22	12.70	33.3	84.8	89.4
160	32A	50.800	31.55	14.27	38.1	99.6	104.4
08B	08B	12.700	7.75	4.45	9.5	25.1	26.6
10B	10B	15.875	9.65	5.08	11.9	30.1	31.5
12B	12B	19.050	11.68	5.72	14.3	35.4	37.1
16B	16B	25.400	17.02	8.28	19.1	53.0	54.3
20B	20B	31.750	19.56	10.19	41.0	79.9	83.6
24B	24B	38.100	25.40	14.63	50.7	101.4	105.8
28B	28B	44.450	30.99	15.90	61.9	124.0	128.4
32B	32B	50.800	30.99	17.81	64.8	126.8	131.8

特殊加长销输送链


Conveyor chains with special extended pins

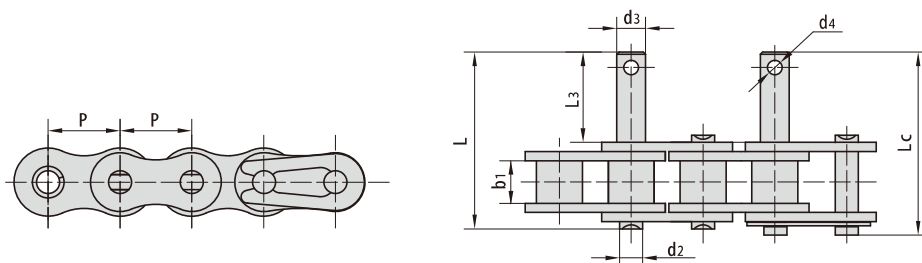

东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L ₃	L	L _c	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
06B-D 1F21	9.525	-	3.28	5.00	15.00	-	28.40	-
06C-D 1F12	9.525	4.77	3.58	3.55	14.75	26.20	-	-
08A-D 1F37	12.700	-	3.96	4.85	35.35	-	52.00	-
08A-D 1F48	12.700	7.85	3.96	5.00	45.00	-	61.90	-
08A-D 1F49	12.700	-	3.96	5.00	35.00	-	51.65	-
08B-D 1F53	12.700	7.75	4.45	6.00	20.00	35.60	-	-
08B-D 1F67	12.700	7.75	4.45	6.00	15.50	31.40	-	-
08B-D 1F74	12.700	7.75	4.45	4.45	16.00	31.70	-	1.60
08B-D 1F79	12.700	7.75	4.45	6.00	15.00	30.90	32.20	-
08B-D 1F80	12.700	7.75	4.45	6.00	15.00	30.90	-	2.60
08B-D 3F101	12.700	7.75	4.45	6.00	9.00	24.80	-	-
08B-D 3F95	12.700	7.75	4.45	7.00	25.00	40.80	-	42.30
08B-D 4	12.700	7.75	4.45	6.00	15.00	31.20	32.40	-
08B-D 7	12.700	7.75	4.45	6.00	14.00	30.20	31.40	2.60
08BF3	12.700	7.75	4.45	6.00	8.00	24.20	25.40	-
10A-D 1F31	15.875	9.40	5.08	8.00	15.00	34.40	-	-
10A-D 1F32	15.875	9.40	5.08	7.50	19.00	38.40	-	3.00
10A-D 1F36	15.875	9.40	5.08	6.60	20.00	39.40	-	-
10A-D 1F40	15.875	9.40	5.08	5.96	25.30	44.70	-	-
10A-D 1F43	15.875	-	5.08	8.00	40.00	-	60.90	-
10A-D 1F48	15.875	9.40	5.08	6.00	25.00	44.40	-	-
10A-D 3F44	15.875	9.40	5.08	6.00	13.60	33.00	-	-
10A-D 9	15.875	9.40	5.08	6.35	20.00	39.50	41.10	-
10B-D 1F31	15.875	9.65	5.08	6.00	20.00	38.20	-	-
10B-D 1F39	15.875	9.65	5.08	5.08	29.90	48.10	-	1.60
10B-D 1F42	15.875	9.65	5.08	6.00	51.00	62.90	-	-
10B-D 1F45	15.875	9.65	5.08	6.50	18.00	36.30	-	-
10B-D 3F50	15.875	9.65	5.08	8.00	9.00	27.20	-	-
10B-D 7	15.875	9.65	5.08	6.50	40.00	58.50	60.10	-
10BF2	15.875	9.65	5.08	6.00	25.00	43.40	44.80	-
10BF3	15.875	9.65	5.08	8.00	25.00	43.40	44.80	-
12A-D 1F30	19.050	12.57	5.94	8.00	28.60	53.10	-	-
12A-D 1F36	19.050	12.57	5.94	7.00	43.00	67.60	70.00	-
12A-D 1F37	19.050	12.57	5.94	12.70	41.20	65.80	-	-
12A-D 1F41	19.050	12.57	5.94	8.00	15.00	39.30	-	-
12A-D 1F46	19.050	12.57	5.94	5.94	16.35	40.65	-	2.60
12A-D 1F53	19.050	12.57	5.94	8.00	40.00	64.50	-	-
12A-D 1F54	19.050	12.57	5.94	8.10	25.50	49.80	-	2.50
12A-D 1F55	19.050	12.57	5.94	8.00	40.00	-	66.10	-
12A-D 1F61	19.050	12.57	5.94	7.00	42.00	66.30	-	-
12A-D 1F72	19.050	12.57	5.94	8.00	35.00	59.30	-	-

特殊加长销输送链


Conveyor chains with special extended pins

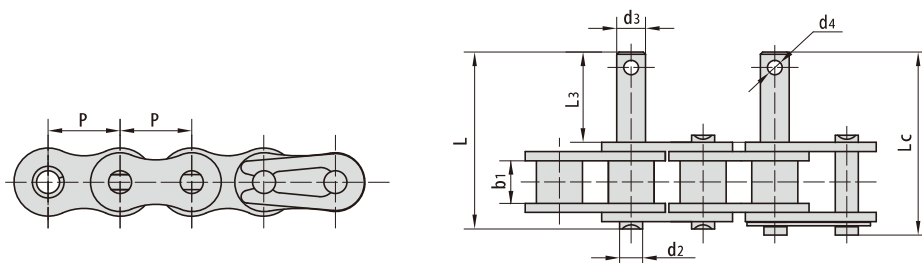

东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L ₃	L	L _c	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
12A-D 1F77	19.050	12.57	5.94	5.94	30.00	54.50	-	2.00
12A-D 1F79	19.050	12.57	5.94	12.00	19.00	43.30	-	3.00
12A-D 1F80	19.050	12.57	5.94	5.94	27.00	51.30	-	2.00
12B-D 1F100	19.050	11.68	5.72	8.00	24.00	45.10	-	-
12B-D 1F106	19.050	11.68	5.72	7.90	36.00	57.20	-	-
12B-D 1F42	19.050	11.68	5.72	5.96	16.00	37.30	-	-
12B-D 1F43	19.050	11.68	5.72	10.00	40.00	61.30	-	-
12B-D 1F51	19.050	11.68	5.72	10.00	18.00	39.30	-	-
12B-D 1F55	19.050	11.68	5.72	6.00	20.00	41.10	-	-
12B-D 1F77	19.050	11.68	5.72	8.00	40.00	61.10	-	-
12B-D 1F81	19.050	11.68	5.72	8.00	26.00	47.10	-	-
12B-D 1F85	19.050	11.68	5.72	7.00	22.50	43.60	-	-
12B-D 1F94	19.050	11.68	5.72	5.72	14.30	35.40	-	2.00
12B-D 3F105	19.050	11.68	5.72	6.00	38.10	59.20	61.00	-
12B-D 3F47	19.050	11.68	5.72	6.35	20.00	41.10	-	-
12B-D 3F87	19.050	11.68	5.72	5.72	23.40	44.50	-	2.50
12B-D 5	19.050	11.68	5.72	8.00	40.00	61.40	63.10	-
12B-D 6	19.050	11.68	5.72	6.00	20.00	41.10	42.90	-
12B-D 7	19.050	11.68	5.72	8.00	25.00	46.40	48.20	-
16A-D 1F35	25.400	15.75	7.92	16.00	14.00	45.20	47.40	-
16A-D 1F53	25.400	15.75	7.92	10.00	47.00	78.00	-	3.20
16A-D 1F55	25.400	15.75	7.92	7.92	22.00	53.20	-	2.50
16A-D 1F67	25.400	15.75	7.92	7.92	46.00	76.90	-	2.00
16A-D 1F69	25.400	15.75	7.92	7.92	50.10	81.00	-	3.00
16A-D 1F73	25.400	15.75	7.92	8.50	36.20	67.20	-	-
16A-D 3F2	25.400	-	7.92	12.70	50.00	-	87.40	-
16A-D 3F22	25.400	15.75	7.92	8.40	36.00	67.10	-	-
16A-D 3F48	25.400	15.75	7.92	9.00	21.00	51.90	55.70	-
16AF1-D 3F1	25.400	15.75	7.92	9.00	20.00	51.20	54.70	2.50
16B-D 1F34	25.400	17.02	8.28	12.00	20.50	54.50	-	-
16B-D 1F38	25.400	17.02	8.28	14.00	22.00	55.90	-	-
16B-D 1F43	25.400	17.02	8.28	10.00	23.10	57.00	-	3.30
16B-D 1F48	25.400	17.02	8.28	9.00	25.00	58.90	-	-
16B-D 3F30	25.400	17.02	8.28	6.20	19.00	53.00	54.40	1.50
16B-D 3F56	25.400	17.02	8.28	10.00	32.00	65.90	68.90	-
20A-D 1F11	31.750	18.90	9.53	9.53	20.30	62.00	-	3.00
20A-D 1F19	31.750	18.90	9.53	9.53	22.00	60.00	-	2.00
20A-D 1F21	31.750	-	9.53	9.53	38.10	-	76.40	-
20B-D 3F10	31.750	19.56	10.19	10.19	16.00	54.90	-	3.20
24A-D 1F16	38.100	25.22	11.10	11.10	42.00	89.80	-	4.00
24B-D 3F2	38.100	25.40	14.63	14.63	99.60	156.60	-	4.00
32A-D 1F3	50.800	31.55	14.27	18.00	45.00	106.80	-	-

特殊加长销输送链


Conveyor chains with special extended pins

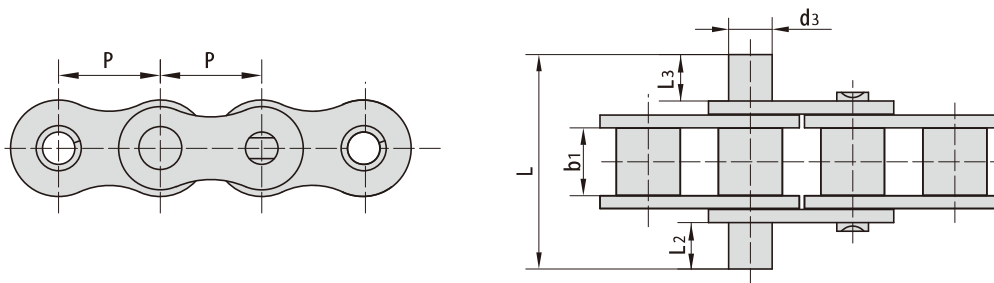

东华链号 Donghua Chain No.	P	b1	d3	L2	L3	L
	mm	mm	mm	mm	mm	mm
06B-D 4	9.525	5.72	3.28	3.00	5.00	19.40
08A-DD 1F 4	12.700	7.85	3.96	17.80	17.80	49.90
08A-DD 3F 6	12.700	7.85	3.96	9.50	9.50	33.40
08B-D 8	12.700	7.75	4.45	10.00	38.00	62.50
08B-DD 3F 13	12.700	7.75	4.45	15.20	15.20	44.90
08B-DD 3F 14	12.700	7.75	4.45	13.00	13.00	40.80
08B-DD 3F 9-B	12.700	7.75	4.45	3.50	3.50	21.10
08BF 7	12.700	7.75	4.45	3.00	5.00	22.80
10A-DD 3F 3	15.875	9.40	5.08	2.90	2.90	24.00
10A-DD 3F 4	15.875	9.40	5.08	12.45	12.45	43.00
10B-DD 1F 41	15.875	9.65	5.08	18.10	18.10	53.20
12A-D 7	19.050	12.57	8.10	8.60	8.60	40.00
12A-DD 3F 3	19.050	12.57	5.94	4.50	4.50	32.00
12A-DD 3F 5	19.050	12.57	8.10	8.60	8.60	40.00
12A-DD 3F 6	19.050	12.57	5.94	3.10	3.10	29.00
12A-DD 3F 7	19.050	12.57	5.94	3.20	3.20	29.40
12B-DD 1F 1	19.050	11.68	5.72	11.00	11.00	41.70
12B-DD 3F 3	19.050	11.68	5.72	5.20	5.20	30.00
12B-DD 3F 6	19.050	11.68	5.72	25.00	25.00	69.70
12B-DD 3F 7	19.050	11.68	5.72	21.10	21.10	61.80
16A-DD 1F 2	25.400	15.75	7.92	22.70	22.70	75.00
16A-DD 1F 4	25.400	15.75	7.92	19.05	19.05	67.20
16A-DD 1F 6	25.400	15.75	7.92	22.90	22.90	75.00
16B-DD 1F 13	25.400	17.02	8.28	11.00	11.00	53.80
16B-DD 1F 9	25.400	17.02	8.28	34.00	34.00	100.00
16B-DD 3F 10	25.400	17.02	8.28	14.45	14.45	60.60
16B-DD 3F 4	25.400	17.02	8.28	3.00	3.00	38.00
16BF 4	25.400	17.02	8.28	18.00	18.00	68.00
80SHF1-DD 1	25.400	15.75	7.92	14.95	32.45	80.00
20A-DD 3F 3	31.750	18.90	9.53	4.10	4.10	44.00
20A-DD 3F 4	31.750	18.90	9.53	3.80	3.80	43.40
24B-DD 1F 3	38.100	25.40	14.63	16.70	16.70	81.00
28B-DD 3F 3	44.450	30.99	15.90	20.00	20.00	98.70
32A-DD 1F 1	50.800	31.55	14.27	38.10	38.10	134.50
40B-DD 1F 1	63.500	38.10	22.89	21.56	21.56	180.00

特殊加长销输送链


Conveyor chains with special extended pins

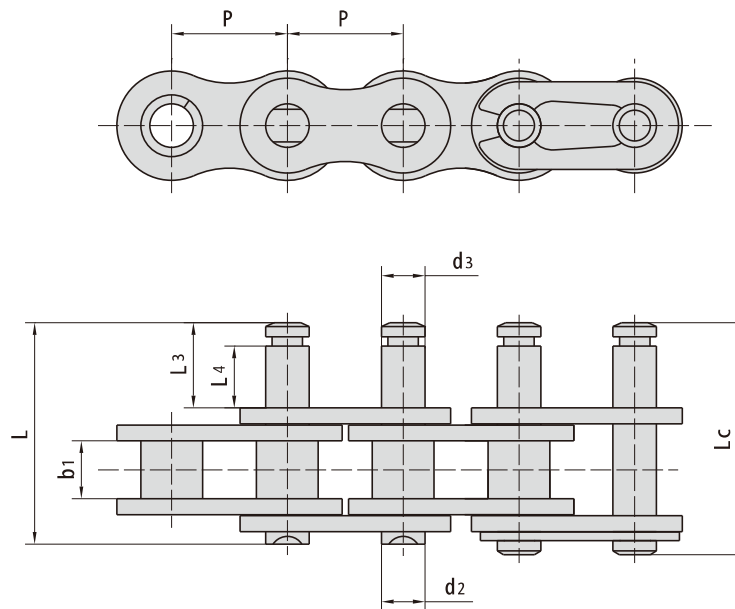


东华链号 Donghua Chain No.	P	b1	d2	d3	L3	L4	L	Lc
	mm	mm	mm	mm	mm	mm	mm	mm
06C-D 3F10	9.525	4.77	3.58	3.30	4.80	3.10	16.30	17.30
06C-D 3F12	9.525	4.77	3.58	3.58	7.00	5.00	18.50	19.50
A06B-D 12	9.525	5.72	3.28	3.28	3.50	1.50	15.80	-
08A-D 1F32	12.700	7.85	3.96	3.96	17.55	13.85	33.00	-
08B-D 1F60	12.700	7.75	4.45	4.45	9.50	7.00	25.10	26.60
08B-D 3F40	12.700	-	4.45	4.45	16.80	14.50	-	34.10
10B-D 1F46	15.875	9.65	5.08	5.08	35.00	32.20	53.20	-
10B-D 1F49	15.875	9.65	5.08	7.00	10.70	8.00	28.90	-
10B-D 1F56	15.875	9.65	5.08	5.08	29.90	26.80	48.10	-
12A-D 1F60	19.050	12.57	5.94	5.94	7.00	4.90	-	31.30
12B-D 1F86	19.050	11.68	5.72	5.72	25.00	22.60	46.10	-
C 12B-D 1F111	19.050	11.68	5.72	5.72	10.00	6.80	31.10	32.80
C 12BNP-D 3F68	19.050	11.68	5.72	5.00	10.50	8.00	31.60	33.30
C 12BNP-D 3F76	19.050	11.68	5.72	5.00	6.50	4.00	27.60	29.30
16B-D 1F11	25.400	17.02	8.28	8.28	37.80	35.40	71.80	73.10
16B-D 1F44	25.400	17.02	8.28	8.28	35.40	32.00	69.30	-
16B-D 3F59	25.400	17.02	8.28	8.28	26.40	23.00	60.30	61.60
C 16A-D 1F49	25.400	15.75	7.92	8.00	39.00	35.40	70.10	-

特殊加长销输送链

Conveyor chains with special extended pins

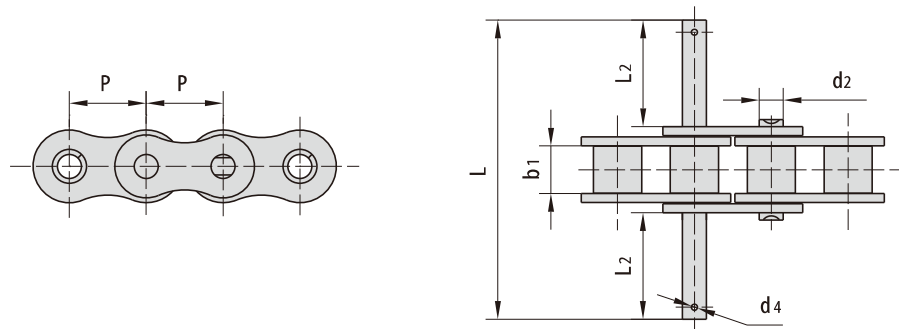


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₄	L ₂	L
	mm	mm	mm	mm	mm	mm
08A-DD 1F5	12.700	7.85	3.96	1.00	17.65	49.60
16A-DD 1F3	25.400	15.75	7.92	2.60	28.95	87.00
24A-DD 1F2	38.100	25.22	11.10	2.50	42.35	130.00

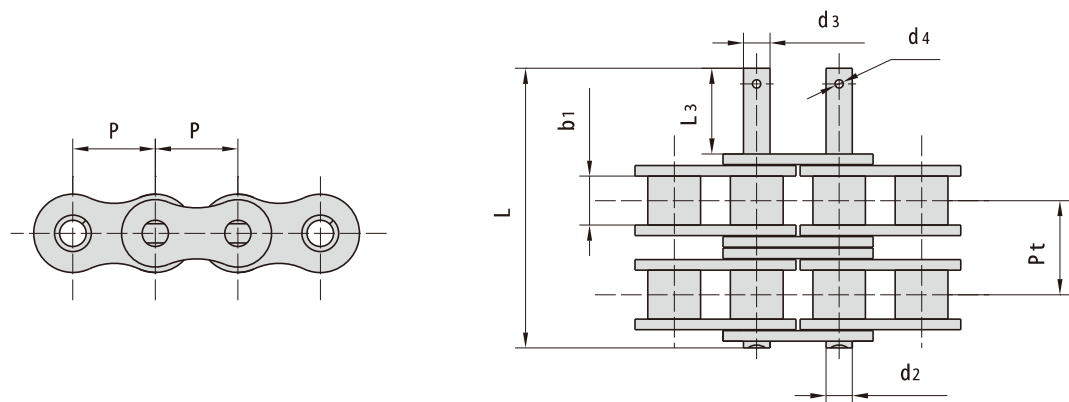


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	d ₄	L ₃	L	P _t
	mm	mm	mm	mm	mm	mm	mm	mm
08B-2-D 1F39	12.700	7.75	4.45	4.45	1.60	17.70	47.60	13.92
08B-D 3F79-2	12.700	7.75	4.45	7.00	-	25.00	55.10	13.92
10A-2-D 3F67	15.875	9.40	5.08	5.08	1.60	16.50	54.10	18.11
12A-2-D 3F47	19.050	12.57	5.94	8.00	-	28.00	75.50	22.78
12A-2-D 3F48	19.050	12.57	5.94	8.00	-	32.00	79.50	22.78
12A-D 3F44-2	19.050	12.57	5.94	8.00	-	18.00	65.20	22.78
12A-D 3F85-2	19.050	12.57	5.94	8.00	-	18.00	65.20	66.90
32A-2-D 3F2	50.800	31.55	14.27	14.27	4.00	77.89	197.00	58.55

特殊加长销输送链

Conveyor chains with special extended pins

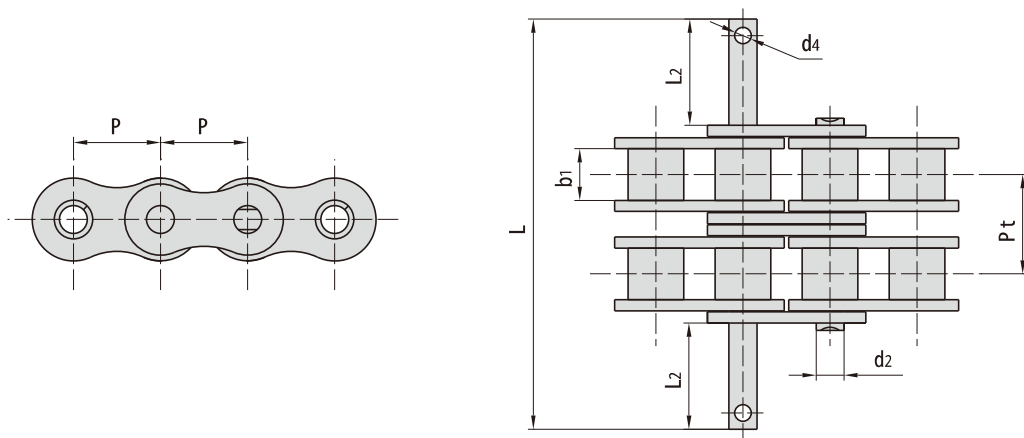


东华链号 Donghua Chain No.	P mm	b ₁ mm	d ₂ mm	d ₄ mm	L ₂ mm	L mm	Pt mm
10A-DD 3F2-2	15.875	9.40	5.08	2.00	17.70	47.80	19.70
20A-DD 1F4-2	31.750	18.90	9.53	3.20	14.40	110.00	35.76
24A-2-D 1F1	38.100	25.22	11.10	2.40	42.60	176.00	45.44

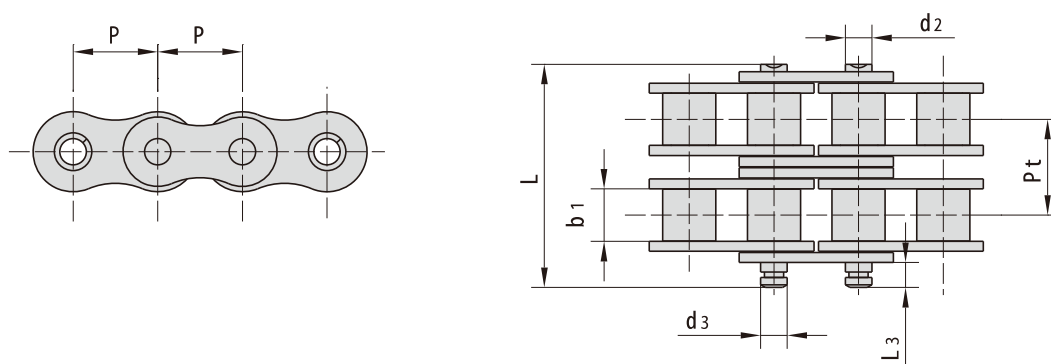


东华链号 Donghua Chain No.	P mm	b ₁ mm	d ₂ mm	d ₃ mm	L mm	L ₃ mm	Pt mm
08A-2-D 3F39	12.70	7.85	3.96	3.96	33.75	3.90	14.38

特殊加长销输送链

Conveyor chains with special extended pins

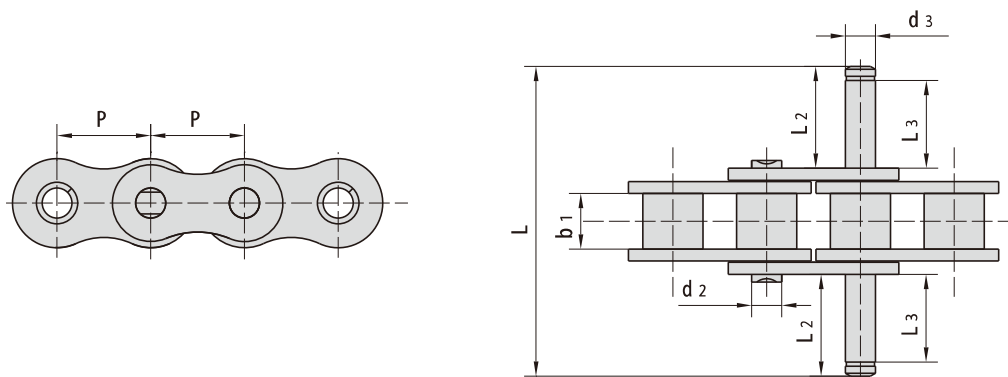


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L	L ₂	L ₃
	mm	mm	mm	mm	mm	mm	mm
10AF94	15.875	9.40	5.08	5.08	52.50	17.20	14.80
20B-DD1F3	31.750	19.56	10.19	10.19	119.30	41.50	38.35
24B-DD1F2	38.100	25.40	14.63	14.63	149.20	50.80	47.65
24B-DD1F4	38.100	25.40	14.63	14.63	143.20	47.65	43.55
28A-DD1F1	44.450	25.22	12.70	12.60	106.00	28.70	25.70

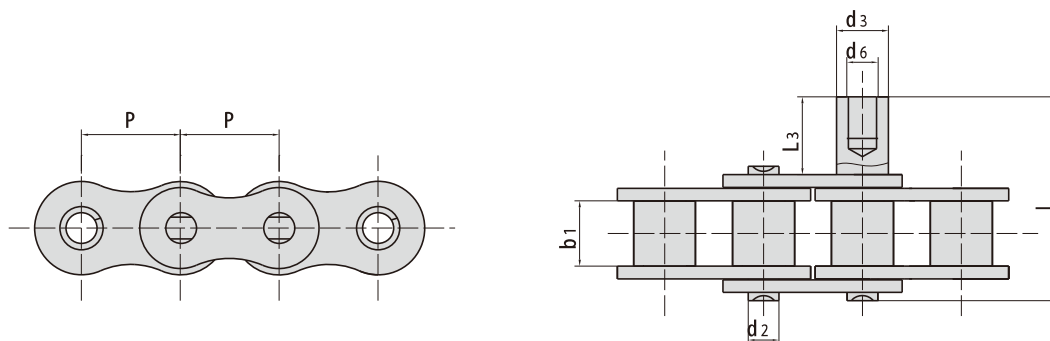

东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L ₃	L	d ₆
	mm	mm	mm	mm	mm	mm	mm
12A-D1F38	19.050	12.57	5.94	9.60	15.00	39.50	M 6
12A-D1F39	19.050	12.57	5.94	9.00	15.00	39.30	M 4
12A-D1F42	19.050	12.57	5.94	10.00	15.00	39.70	M 6
24A-D1F13	38.100	25.22	11.10	25.00	50.00	101.80	18.00
24A-D1F14	38.100	25.22	11.10	25.00	100.00	151.80	18.00
24A-D3F9	38.100	25.22	11.10	25.00	50.00	102.00	18.20
24A-D3F10	38.100	25.22	11.10	25.00	100.00	152.00	18.20

特殊加长销输送链


Conveyor chains with special extended pins

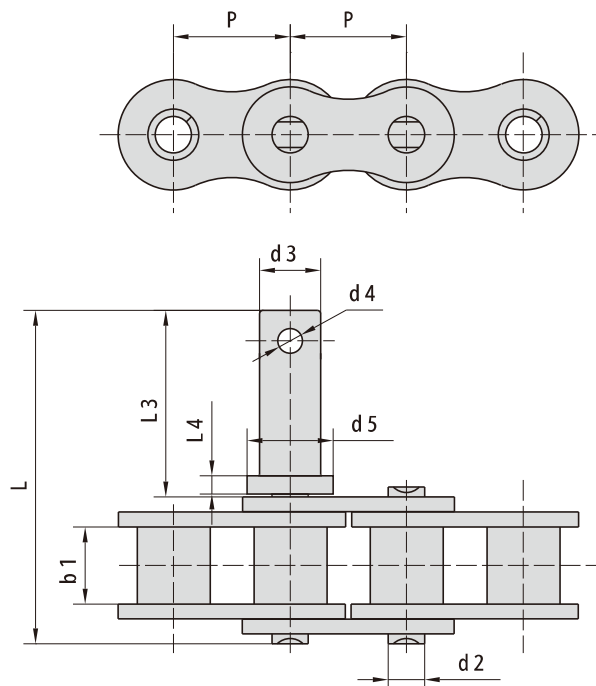


东华链号 Donghua Chain No.	P	b1	L	L3	L4	d2	d3	d4	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm
08B-D 1F70	12.700	7.75	30.50	14.50	2.50	4.45	6.00	-	9.00
08B-D 1F75	12.700	7.75	34.00	18.00	3.00	4.45	7.00	-	10.00
12A-D 1F33	19.050	12.57	43.40	19.00	8.00	5.94	12.00	-	12.00
12A-D 1F52	19.050	12.57	44.10	18.70	1.50	5.94	8.30	3.00	10.00
12A-D 1F57	19.050	12.57	49.30	23.00	2.00	5.94	8.00	2.20	12.00
12A-D 1F66	19.050	12.57	42.30	18.00	3.00	5.94	7.00	-	10.00
12A-D 1F73	19.050	12.57	54.40	30.00	3.00	5.94	10.00	4.00	14.00
12B-D 1F78	19.050	11.68	44.60	23.50	5.50	5.72	7.40	-	12.00
12B-DD 1F5	19.050	11.68	52.90	27.70	7.20	5.72	7.70	-	12.00
16A-D 1F25	25.400	15.75	56.00	20.00	5.00	7.92	11.00	2.50	16.00
16A-D 1F42	25.400	15.75	55.80	24.50	5.50	7.92	8.00	-	12.00
16A-D 1F51	25.400	15.75	47.90	17.00	2.50	7.92	8.10	2.20	14.00
16A-D 1F58	25.400	15.75	54.70	20.00	4.50	7.92	10.00	2.50	12.70
16A-D 1F63	25.400	15.75	54.70	20.00	4.50	7.92	8.00	2.50	12.70
16A-D 1F70	25.400	15.75	55.90	25.00	6.00	7.92	8.00	-	12.00
16A-D 1F77	25.400	15.75	55.70	21.50	12.00	5.94	8.00	2.00	11.00
16B-D 1F32	25.400	17.02	84.40	50.50	12.00	8.28	7.60	2.00	15.00
16B-D 1F52	25.400	17.02	60.70	26.50	2.50	8.28	9.00	3.00	12.00
16B-D 28	25.400	17.02	75.40	41.00	3.00	8.28	8.25	2.50	13.00
20A-D 1F7	31.750	18.90	61.80	23.70	3.70	9.53	14.00	-	20.00
20A-D 1F8	31.750	18.90	63.30	25.20	3.70	9.53	14.00	-	20.00
C 20AH-D 1F1	31.750	18.90	69.50	38.00	3.50	9.53	11.00	-	15.00
24A-D 1F19	38.100	25.30	77.00	25.00	3.00	11.10	11.00	3.00	14.00

特殊加长销输送链

Conveyor chains with special extended pins

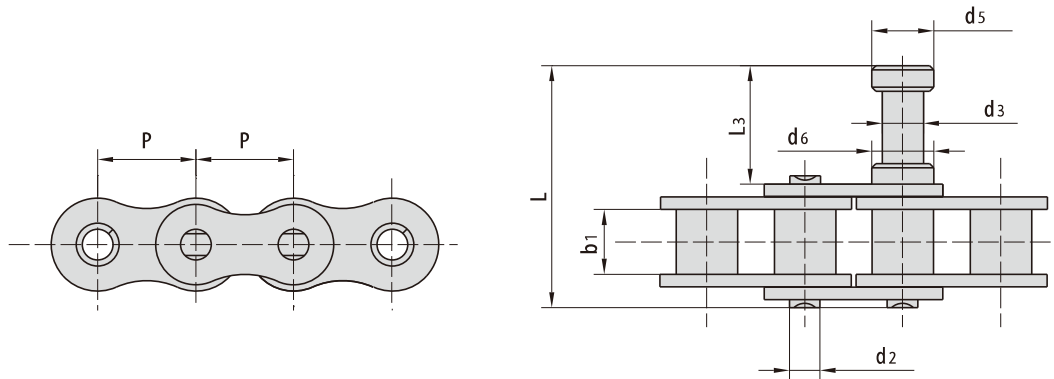


东华链号 Donghua Chain No.	P	b ₁	L	L ₃	d ₂	d ₃	d ₅	d ₆
	mm	mm	mm	mm	mm	mm	mm	mm
12A-D 3F48	19.050	12.57	47.30	23.00	5.94	8.00	12.00	12.00
16A-D 1F36	25.400	15.75	55.20	24.00	7.92	12.00	16.00	-
16B-D 1F39	25.400	17.02	67.50	33.60	8.28	8.28	16.00	16.00

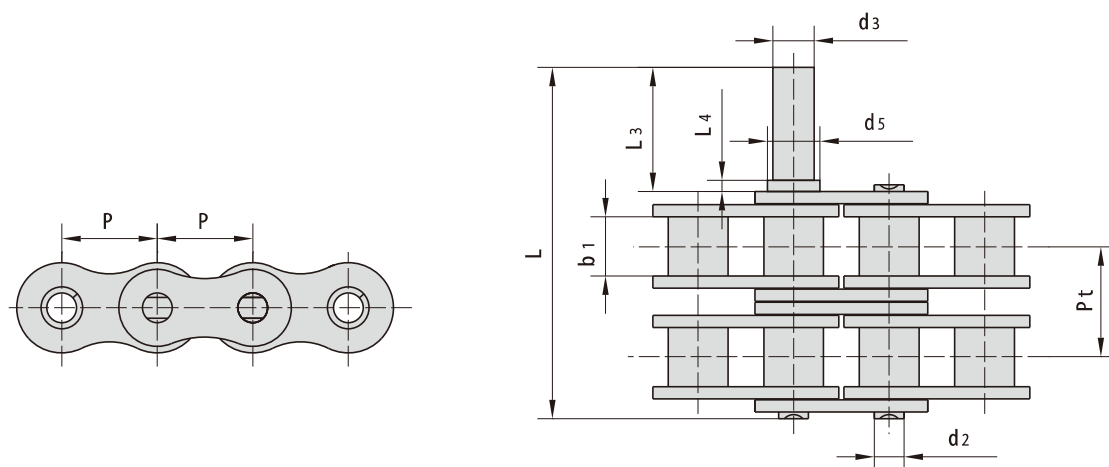


东华链号 Donghua Chain No.	P	b ₁	L	L ₃	L ₄	d ₂	d ₃	d ₅	Pt
	mm	mm	mm	mm	mm	mm	mm	mm	mm
16A-D 1F72-2	25.400	15.75	94.00	33.00	3.00	7.92	11.00	14.00	29.29

特殊加长销输送链

Conveyor chains with special extended pins

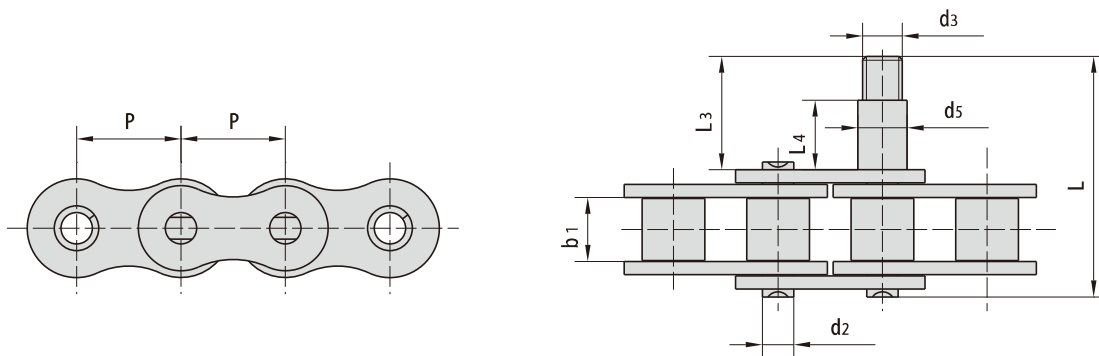


东华链号 Donghua Chain No.	P	b ₁	L	L ₃	L ₄	d ₂	d ₃	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm
16A-DD 1F61	25.400	-	57.20	24.00	17.00	7.92	M 8	10.00
20A-DD 1F17	31.750	18.90	73.00	35.00	23.00	9.53	M 12	15.00

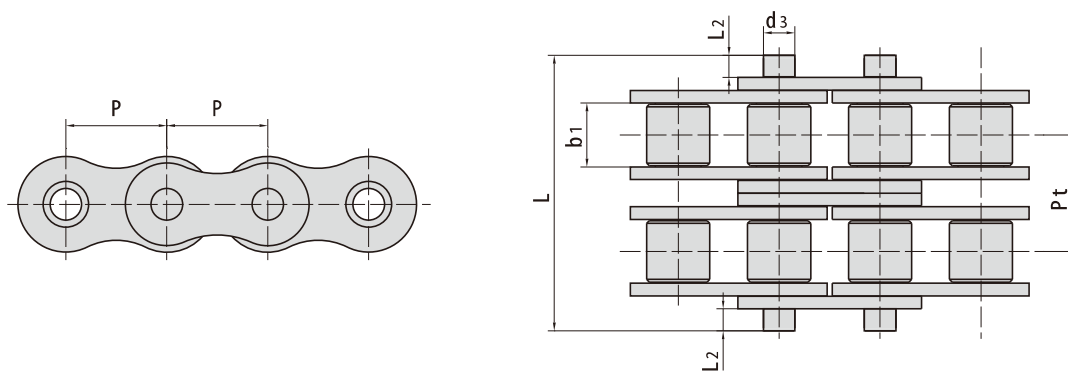


东华链号 Donghua Chain No.	P	b ₁	L	L ₂	d ₃	Pt
	mm	mm	mm	mm	mm	mm
08B-DD 3F17-2	12.700	7.75	40.80	6.00	4.45	13.92
08BNP-2-DD 3F15	12.700	7.75	81.80	26.50	4.45	13.92
28B-DD 3F3-2	44.450	30.99	172.20	27.00	15.90	59.56
48A-DD 3F1-2	76.200	48.20	208.00	16.60	23.81	87.83

特殊加长销输送链

Conveyor chains with special extended pins

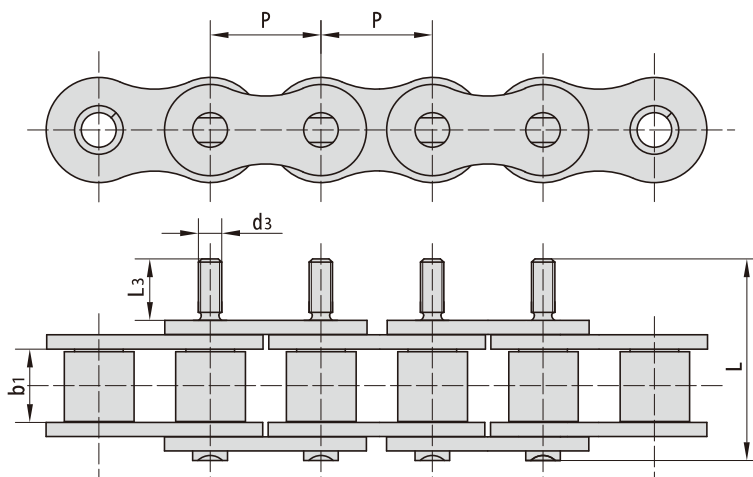


东华链号 Donghua Chain No.	P	b ₁	d ₃	L ₃	L
	mm	mm	mm	mm	mm
12A-D 3F32	19.050	12.57	M 4	10.30	34.60
12AF19	19.050	12.57	M 4	10.00	34.50
12AF108	19.050	12.57	M 4	10.80	35.20
12BF13	19.050	11.68	M 4	10.00	31.00
12BF102	19.050	-	M 5	12.45	33.45

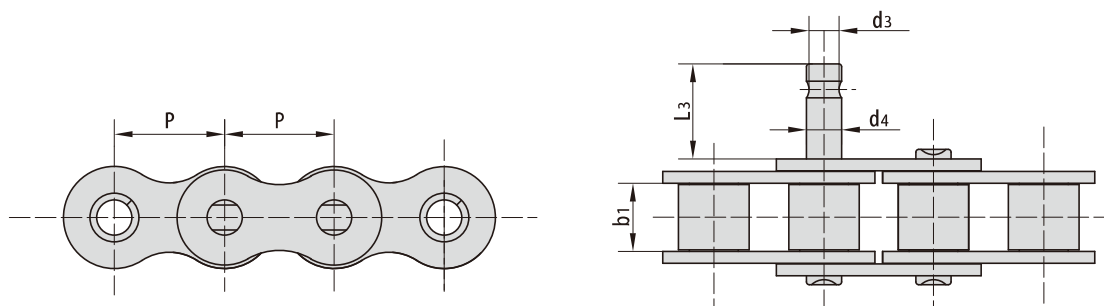


东华链号 Donghua Chain No.	P	b ₁	d ₃	d ₄	L ₃
	mm	mm	mm	mm	mm
10B-D 12	15.875	9.65	4.50	5.08	12.00
10B-D 1F27	15.875	9.65	5.08	4.50	13.00
10B-D 9	15.875	9.65	4.50	5.08	13.00
12B-D 1F58	19.050	11.68	5.72	5.00	13.00
12B-D 8	19.050	11.68	5.15	5.72	13.00
20A-D 1F15	31.750	18.90	10.00	11.10	56.90

双节距输送链 Double pitch conveyor chains

小滚子型 Small Roller Type

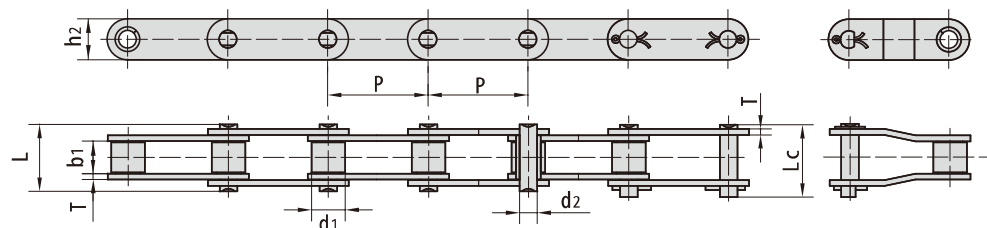

大滚子型 Large Roller Type

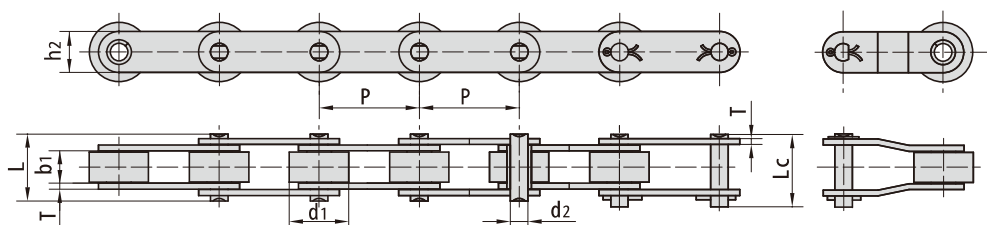

ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min kN/bf	Q0 kN	q kg/m
C 208A	C 2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1/3205	16.7	0.50
C 208AL	C 2042		15.88									0.84
C 208AH	C 2040H	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	14.1/3205	17.2	0.65
C 208AHL	C 2042H		15.88									1.00
C 208B		25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	18.0/4091	19.4	0.55
C 208BL			15.88									0.89
C 210A	C 2050	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	22.2/5045	28.1	0.78
C 210AL	C 2052		19.05									1.27
C 210B		31.75	10.16	9.65	5.08	19.5	20.9	14.7	1.70	22.4/5036	24.6	0.75
C 210BL			19.05									1.21
C 212A	C 2060	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8/7227	36.8	1.12
C 212AL	C 2062		22.23									1.61
C 212AH	C 2060H	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	31.8/7227	41.6	1.44
C 212AHL	C 2062H		22.23									2.07
C 212B		38.10	12.07	11.68	5.72	22.5	24.2	16.0	1.85	29.0/6519	31.9	0.90
C 212BL			22.23									1.55
C 216A	C 2080	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	56.7/12886	65.7	2.08
C 216AL	C 2082		28.58									3.12
C 216AH	C 2080H	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	56.7/12886	70.0	2.54
C 216AHL	C 2082H		28.58									3.58
C 216B		50.80	15.88	17.02	8.28	36.1	39.1	21.0	4.15/3.10	60.0/13489	66.0	2.14
C 216BL			28.58									3.27
C 220A	C 2100	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	88.5/20114	102.6	3.01
C 220AL	C 2102		39.67									4.83
C 220AH	C 2100H	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.80	88.5/20114	112.4	3.56
C 220AHL	C 2102H		39.67									5.38
C 220B		63.50	19.05	19.56	10.19	41.3	45.0	26.4	4.50/3.50	95.0/21357	104.5	2.93
C 220BL			39.67									5.01
C 224A	C 2120	76.20	22.23	25.22	11.10	50.3	54.3	35.7	4.80	127.0/28864	147.3	4.66
C 224AL	C 2122		44.45									7.66
C 224AH	C 2120H	76.20	22.23	25.22	11.10	53.5	57.5	35.7	5.60	127.0/28864	160.9	5.26
C 224AHL	C 2122H		44.45									8.26
C 224B		76.20	25.40	25.40	14.63	53.4	57.8	33.2	6.00/4.80	160.0/35969	176.0	5.17
C 224BL			44.45									7.88
C 232A	C 2160	101.60	28.58	31.75	14.27	64.8	69.6	47.8	6.40	226.8/51545	278.9	8.15
C 232AL	C 2162		57.15									13.00
C 232AH	C 2160H	101.60	28.58	31.75	14.27	68.2	73.0	47.8	7.20	226.8/51545	285.8	9.06
C 232AHL	C 2162H		57.15									13.84


双节距输送链

Double pitch conveyor chains


非标双节距输送链

Non-standard double pitch conveyor chains

小滚子型 Small Roller Type

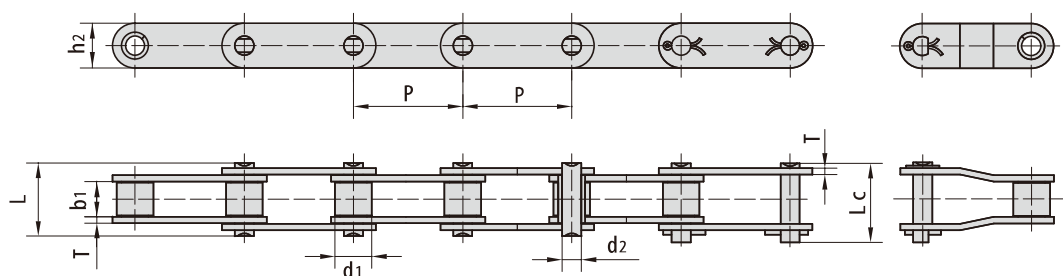

大滚子型 Large Roller Type

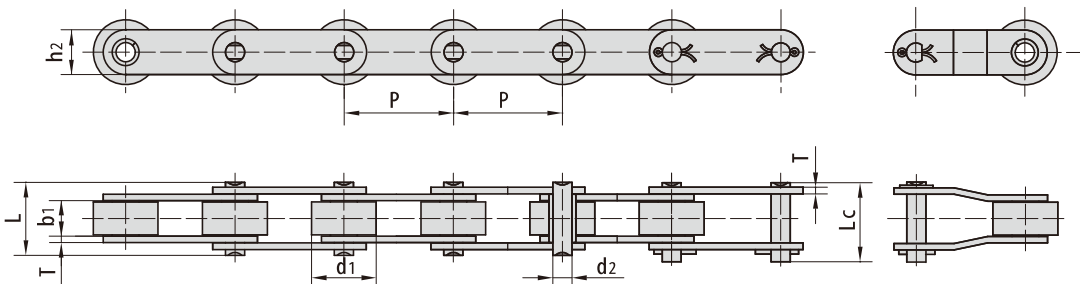

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min kN/bf	Q0 kN	q kg/m
	mm	mm	mm	mm	mm	mm	mm	mm			
208AF17	25.40	7.95	4.00	3.96	12.75	15.00	12.00	1.50	13.80/3102	15.2	0.40
208AF18	25.40	7.95	5.10	3.96	13.76	16.00	12.00	1.50	13.80/3102	15.2	0.38
208BF45	25.40	8.51	47.64	4.45	57.00	58.50	11.80	1.60	17.80/4001	19.6	1.15
C208BF3	25.40	8.51	7.95	4.45	16.70	—	11.80	1.50	10.00/22480	11.5	0.61
C2050F12	31.75	10.16	9.52	5.08	20.20	21.70	15.00	2.03	18.53/4165	20.0	1.05
C2052F51	31.75	19.05	9.40	5.08	20.70	—	15.00	2.03	21.80/4901	24.0	0.81
2060F75	38.10	11.91	16.07	5.94	29.50	31.90	18.00	2.42	31.10/6991	34.2	1.11
212BF1	38.10	12.07	11.68	5.94	25.20	28.00	40.80	2.42	31.80/7149	36.6	2.73
C2060F28	38.10	11.91	12.57	5.72	25.90	27.70	20.00	2.42	28.90/6496	32.4	1.40
C2060F75	38.10	11.91	16.07	5.94	29.50	31.90	18.00	2.42	31.10/6991	34.2	1.32
C2062F101	38.10	22.23	12.57	5.94	35.00	—	18.00	2.42	31.10/6991	34.2	1.98
C2062F95	38.10	22.23	12.70	5.94	25.80	29.30	18.00	2.42	24.00/5395	26.4	2.20
C212BF2	38.10	12.07	11.68	5.72	22.50	25.50	35.00	1.85	28.90/6496	33.3	1.88
C212BF9	38.10	12.07	11.68	5.72	22.50	25.20	20.00	1.85	28.90/6496	33.3	1.10


双节距输送链

Double pitch conveyor chains


非标双节距输送链

Non-standard double pitch conveyor chains

小滚子型 Small Roller Type

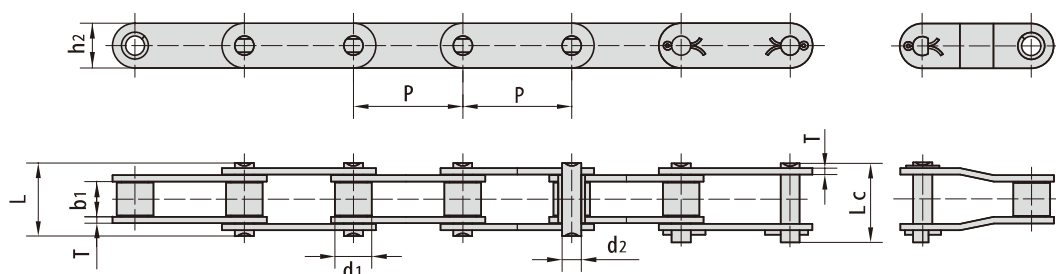

大滚子型 Large Roller Type

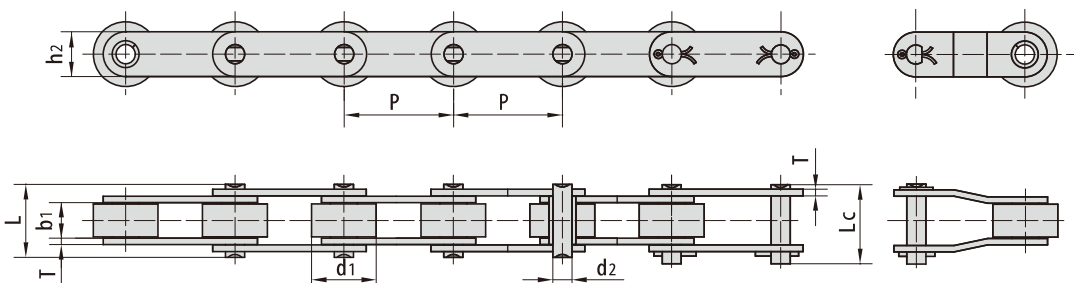


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min kN/bf	Q0 kN	q kg/m
	mm	mm	mm	mm	mm	mm	mm	mm			
2082HF83	50.80	28.58	15.75	7.92	36.20	38.90	29.00	4.00	56.7/12746	62.4	3.90
216BF4	50.80	15.88	17.90	8.28	36.10	39.10	21.00	3.70	60.0/13488	66.0	1.80
C 2060H-50.8F1	50.80	11.91	12.57	5.94	29.20	31.00	17.20	3.25	31.1/6991	34.2	2.67
C 2080HF1	50.80	15.88	15.75	7.92	36.20	39.40	23.00	4.00	55.6/12499	61.1	2.49
C 2080HF51	50.80	18.00	32.00	7.92	54.00	57.50	24.00	4.00	55.6/12499	61.1	2.66
C 2080HF87	50.80	18.00	32.00	7.92	52.80	56.00	24.00	4.00	55.6/12499	61.2	2.67
C 2082HF94	50.80	25.40	15.75	7.92	36.20	39.40	23.00	4.00	60.0/13488	66.0	3.23
C 216BF1	50.80	15.88	17.02	8.28	36.10	39.10	20.00	4.00/3.00	60.0/13488	66.0	2.01
220BF1	63.50	19.05	19.56	10.19	36.50	37.60	27.00	3.00	65.0/14612	74.7	1.81
220BF3	63.50	19.05	19.56	10.19	42.30	43.40	26.40	4.50/4.00	56.7/12746	62.4	2.68
C 220AH-BF1	63.50	19.05	18.90	9.53	43.60	46.90	30.00	4.80	86.7/19490	95.5	3.74
C 224AHF2	76.20	27.20	25.22	11.10	-	57.50	35.70	5.60	124.6/280112	139.5	5.78
C 224AHLF5	76.20	43.00	25.22	11.10	53.50	-	35.70	5.60	124.6/280112	142.6	7.94
C 232BF1	101.60	29.21	30.99	17.81	68.00	73.00	42.00	7.00	250.0/56200	275.0	7.85


双节距输送链附件

Double pitch conveyor chain attachments


K1

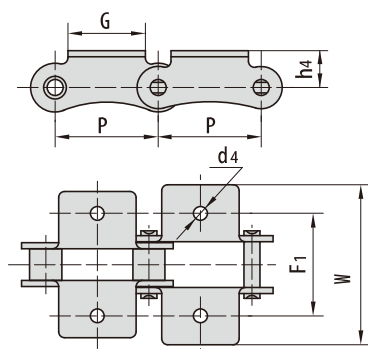

SK1

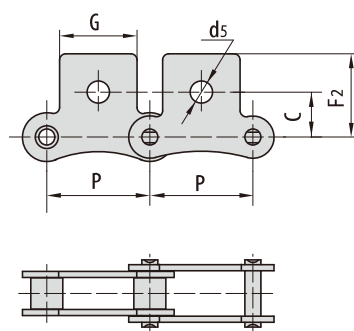

SK2




DIN/ISO 链号 Chain No.	ANSI 链号 Chain No.	P	G	F ₁	W	h ₄	d ₄	C	F ₂	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm	mm
208A	2040	25.40	19.1	25.4	39.6	9.1	3.4	11.1	20.5	5.5
210A	2050	31.75	23.8	31.8	49.0	11.1	5.5	14.3	25.0	6.6
212A	2060	38.10	28.6	42.9	67.8	14.7	5.5	17.5	32.9	9.2
216A	2080	50.80	38.1	55.6	87.8	19.1	6.8	22.2	43.5	11.0
220A	2100	63.50	47.6	66.6	107.5	23.4	9.2	28.6	50.4	13.0
224A	2120	76.20	57.2	79.3	121.4	27.8	10.5	33.3	55.5	15.0
208B		25.40	23.2	25.4	39.6	9.1	4.5	11.1	20.5	5.5
210B		31.75	23.8	31.8	49.0	11.1	5.5			
212B		38.10	35.0	38.1	57.0	14.7	6.6			
216B		50.80	44.0	50.8	84.0	19.1	6.6			
220B		63.50	52.0	63.5	104.0	23.4	8.4			
224B		76.20	60.0	76.2	120.0	27.8	10.5			

东华链号 Donghua Chain No.	P	G	L	F ₁	W	h ₄	d ₄	C	F ₂	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
208BA1F4	25.40	23.80	-	26.20	39.40	10.00	4.30	-	-	-
2060HK1F26	38.10	28.60	-	42.90	67.80	14.70	8.50	-	-	-
212BK2F2	38.10	36.20	-	34.90	55.50	13.00	6.20	-	-	-
212BA0F1	38.10	50.80	-	-	72.80	14.70	-	-	-	-
216BSA2F1	50.80	45.00	25.50	-	-	-	-	30.00	40.00	7.50


双节距输送链附件

Double pitch conveyor chain attachments


A1

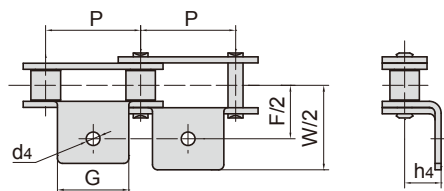


K1

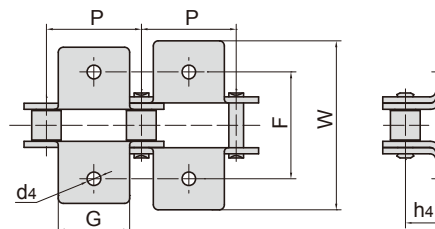

A2

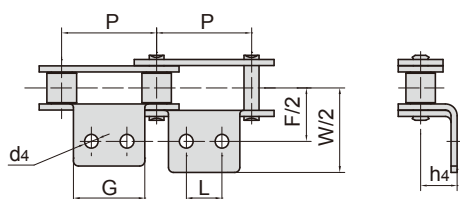

K2

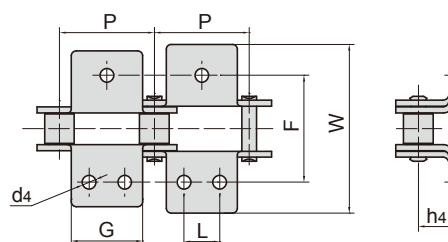


ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	F	W	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm
C 208A	C 2040	25.40	19.1	9.5	25.4	39.6	9.1	3.4
C 208AL	C 2042							
C 208B		25.40	23.2	12.7	25.4	39.6	9.1	4.5
C 208BL								
C 210A	C 2050	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C 210AL	C 2052							
C 212A	C 2060	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C 212AL	C 2062							
C 212AH	C 2060H	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C 212AHL	C 2062H							
C 216A	C 2080	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C 216AL	C 2082							
C 216AH	C 2080H	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C 216AHL	C 2082H							
C 220A	C 2100	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C 220AL	C 2102							
C 220AH	C 2100H	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C 220AHL	C 2102H							
C 224A	C 2120	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C 224AL	C 2122							
C 224AH	C 2120H	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C 224AHL	C 2122H							
C 232A	C 2160	101.60	76.2	38.1	104.7	151.6	36.5	13.1
C 232AL	C 2162							
C 232AH	C 2160H	101.60	76.2	38.1	104.7	151.6	36.5	13.1
C 232AHL	C 2162H							


双节距输送链附件

Double pitch conveyor chain attachments


A1

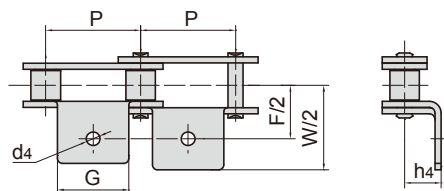


K1

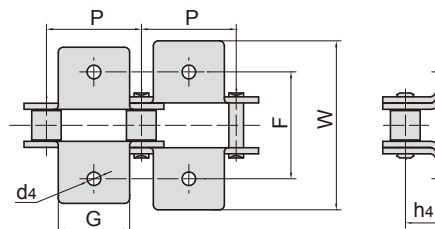

A2

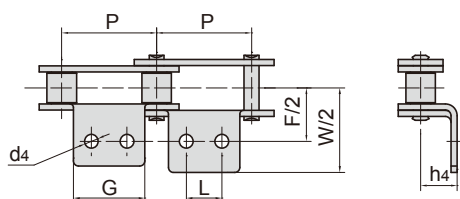

K2

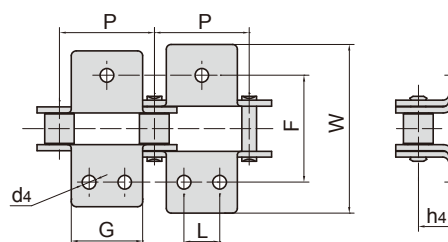


东华链号 Donghua Chain No.	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C 2040A1F3	25.40	19.00	-	25.4	38.20	19.80	5.30
C 2040A1F4	25.40	19.10	-	25.4	36.20	9.10	5.00
C 2040A2F1	25.40	19.00	9.00	25.4	38.40	9.00	5.20
C 2040A2F18	25.40	19.10	9.50	25.4	39.60	9.10	M 4
C 2040K1F6	25.40	19.10	-	25.4	39.60	9.10	M 5
C 2040K1F8	25.40	19.00	-	25.4	39.60	9.10	6.50
C 2042A1F4	25.40	19.00	-	25.4	39.60	9.10	5.00
C 2042F1	25.40	19.00	-	25.4	40.00	9.00	5.20
C 2042HK1F1	25.40	19.00	-	47.0	60.00	9.10	7.00
C 2042K2F4	25.40	20.00	12.00	26.4	35.40	9.00	M 4
C 208AF1	25.40	19.00	-	25.7	38.30	8.80	4.10
C 208BA1F8	25.40	14.80	-	25.6	37.80	9.80	5.50
C 208BA2F2	25.40	23.20	12.70	25.4	39.60	9.10	M 5
C 208BA2F3	25.40	23.20	9.50	25.4	39.70	9.10	4.50
C 208BHK1F7	25.40	23.20	-	25.4	39.60	9.10	6.50
C 208BK1F11	25.40	23.20	-	25.4	39.60	9.10	6.50
C 2050A1F6	31.75	23.80	-	31.8	49.00	11.40	6.30
C 2052A2F1	31.75	19.00	11.90	31.8	49.00	11.10	6.00
C 2052A2F2	31.75	19.00	15.88	31.8	49.00	11.10	5.50
C 2052A2F3	31.75	25.80	12.70	31.8	49.20	11.10	4.80
C 2052K1F10	31.75	25.00	-	32.5	57.00	11.10	5.50
C 2060A1F38	38.10	28.60	-	42.9	67.80	14.70	5.50
C 2060A2F26	38.10	30.00	18.00	38.0	50.00	14.70	5.50
C 2060A2F27	38.10	30.00	18.00	44.0	62.00	14.70	5.50
C 2060A2F93	38.10	50.00	30.00	44.0	63.00	30.00	9.00
C 2060HA1F12	38.10	28.00	-	43.4	61.80	13.90	6.60


双节距输送链附件

Double pitch conveyor chain attachments


A1

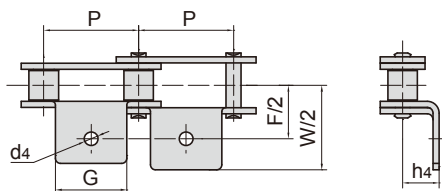


K1

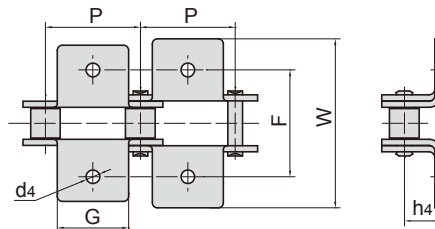

A2

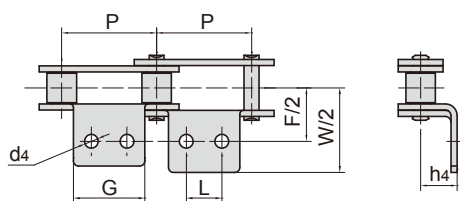

K2

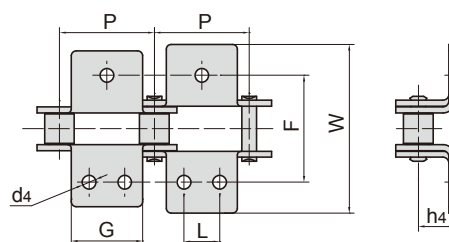


东华链号 Donghua Chain No.	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C 2060HA 2F26	38.10	46.00	32.00	42.0	56.00	15.70	5.50
C 2060HF 3A2	38.10	28.60	14.30	42.9	67.80	14.70	5.20
C 2060HK 1F	38.10	28.60	—	42.9	67.80	14.70	8.00
C 2060HK 1F22	38.10	28.60	—	42.9	67.80	14.70	8.50
C 2060HK 1F26	38.10	28.60	—	42.9	67.80	14.70	9.20
C 2060HK 1F33	38.10	28.60	—	42.9	67.80	14.70	8.90
C 2060HK 2F3	38.10	28.60	14.30	42.9	64.80	14.70	5.00
C 2060HK 2F94	38.10	28.00	14.30	42.8	60.40	14.70	5.60
C 2060K 1F1	38.10	28.60	—	42.9	68.00	14.70	8.50
C 2060K 1F3	38.10	76.20	—	104.7	151.60	36.50	13.10
C 2060K 1F32	38.10	29.00	—	43.5	63.50	14.85	8.50
C 2062A 1F13	38.10	30.00	—	70.2	98.00	14.70	8.50
C 2062A 1F36	38.10	28.60	—	42.9	67.80	12.50	6.80
C 2062A 2F22	38.10	28.60	14.30	42.9	57.40	14.70	5.50
C 2062A 2F24	38.10	28.60	14.30	42.9	67.80	14.70	4.76
C 2062A 2F6	38.10	28.60	14.30	42.9	67.80	14.70	6.00
C 2062HA 1F25	38.10	28.00	—	59.0	75.00	9.00	6.00
C 2062HA 1F4	38.10	20.00	—	45.8	65.80	9.00	6.80
C 2062HA 1F7	38.10	28.60	—	42.9	67.80	14.70	5.20
C 2062HA 2F18	38.10	28.60	14.30	42.2	57.00	14.70	5.50
C 2062HA 2F7	38.10	28.60	14.30	42.9	67.80	14.70	6.50
C 2062HF 15	38.10	28.60	14.30	42.9	67.80	14.70	M 5
C 2062HK 1F5	38.10	28.60	—	42.9	67.80	14.70	7.90
C 2062HK 2F4	38.10	28.60	14.30	42.9	56.40	14.70	5.20
C 2062HK 2F5	38.10	28.60	14.30	55.6	76.00	11.10	5.50
C 2062K 2F7	38.10	28.60	14.30	42.9	67.80	14.70	6.50
C 2080A 1F78	50.80	38.10	—	55.6	87.80	19.10	6.50


双节距输送链附件

Double pitch conveyor chain attachments


A1

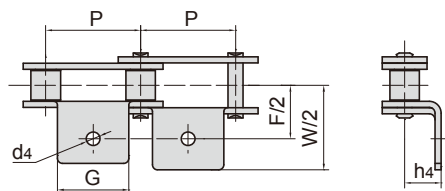


K1

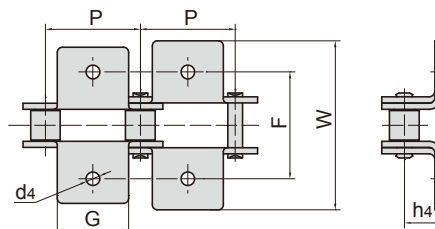

A2

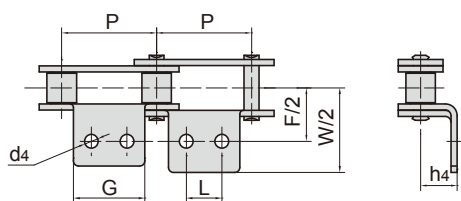

K2

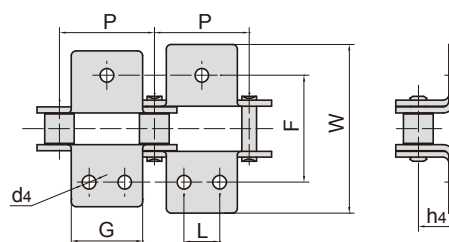


东华链号 Donghua Chain No.	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C 2080A2F78	50.80	64.00	40.00	68.0	88.00	30.00	9.00
C 2080HA2F12	50.80	38.10	19.10	55.6	73.00	19.10	8.10
C 2080HF	50.80	38.10	19.10	55.6	75.20	17.80	10.00
C 2080HK1F13	50.80	38.10	-	55.6	80.00	19.10	9.00
C 2080HK1F24	50.80	38.10	-	55.6	87.80	19.10	11.11×7.94
C 2080HK1F8	50.80	38.10	-	55.6	87.80	19.10	9.00
C 2082A1F22	50.80	38.10	-	49.6	76.20	16.00	10.50
C 2082A1F79	50.80	39.00	-	59.0	78.50	23.00	7.00
C 2082A2F1	50.80	39.00	19.00	58.0	82.00	21.50	7.00
C 2082A2F2	50.80	39.00	19.00	58.0	82.00	21.50	10.00
C 2082A2F23	50.80	65.00	44.00	62.0	86.00	19.40	7.00
C 2082A2F26	50.80	40.00	18.00	62.0	86.00	19.10	7.00
C 2082A2F27	50.80	38.10	19.10	55.6	87.80	19.10	8.20
C 2082F64K2	50.80	34.90	20.00	54.0	79.00	16.00	M 6
C 2082F88K1	50.80	35.00	-	60.0	79.00	16.50	8.00
C 2082HA1F17	50.80	38.10	-	55.6	87.80	19.10	9.50
C 2082HA1F21	50.80	38.10	-	55.6	88.30	19.10	10.20
C 2082HA1F6	50.80	38.10	-	55.6	77.80	19.10	10.00
C 2082HA1F76	50.80	38.10	-	55.6	87.80	19.10	8.50
C 2082HA1F78	50.80	38.10	-	55.6	87.80	19.10	M 8
C 2082HA2F22	50.80	60.00	40.00	62.6	82.60	39.50	9.00
C 2082HA2F6	50.80	38.10	19.10	55.6	87.80	19.10	8.00
C 2082HA2F77	50.80	38.10	19.10	55.6	87.80	19.10	8.50
C 2082HHA1F4	50.80	38.10	-	55.6	87.80	19.10	9.50
C 2082HHA1F5	50.80	38.10	-	55.6	87.80	19.10	10.50


双节距输送链附件

Double pitch conveyor chain attachments


A1

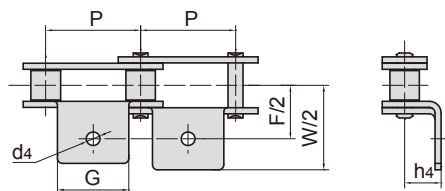


A2

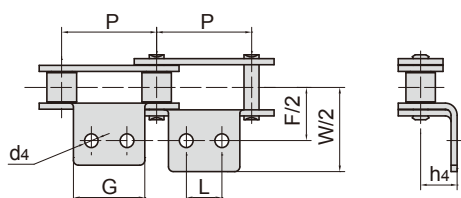

K1

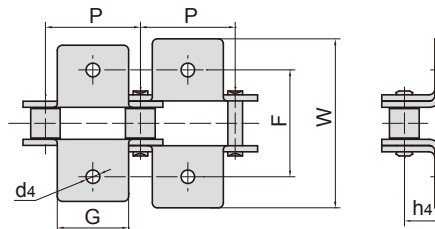

K2

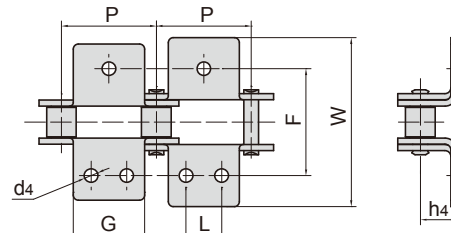


东华链号 Donghua Chain No.	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C 2082HK 1F23	50.80	38.10	—	55.6	87.80	19.10	8.00
C 2082HK 1F5	50.80	38.10	—	55.6	79.60	19.10	8.00
C 2082HK 1F7	50.80	38.10	—	55.6	79.60	19.10	6.50
C 2082HK 1F79	50.80	50.80	—	55.6	87.80	19.10	6.80
C 2082HK 1F80	50.80	38.10	—	55.6	87.80	19.10	6.00
C 2082HK 1F81	50.80	38.10	—	55.6	87.80	19.10	8.20
C 2082HK 1F9	50.80	38.10	—	55.6	81.50	19.10	M 8
C 2082K 2F5	50.80	38.10	19.10	120.0	140.00	19.10	6.80
C 216BA 2F9	50.80	42.00	25.40	50.8	70.80	18.00	6.20
C 2100HK 1F1	63.50	47.60	—	66.0	92.00	25.00	12.50
C 2102HA 1F16	63.50	47.60	—	66.6	107.50	23.40	11.20
C 2102HA 1F3	63.50	47.60	—	66.0	96.60	23.40	12.40
C 2102HA 1F4	63.50	47.60	—	66.6	107.50	23.40	10.00
C 2102HA 2F3	63.50	47.60	23.80	66.6	99.80	23.40	3/8"
C 2102HA 2F4	63.50	47.60	23.80	66.6	107.50	23.40	10.00
C 220AHA 2F2	63.50	47.60	23.80	66.6	107.50	23.40	9.20
C 220AHK 1F1	63.50	47.60	—	66.0	92.00	25.00	12.50
C 220ALA 1F11	63.50	47.60	—	66.6	107.40	23.40	9.20
C 220ALA 1F5	63.50	47.60	—	76.6	107.50	23.40	11.00
C 220ALA 1F8	63.50	47.60	—	66.6	107.40	23.40	8.70
C 220ALA 1F9	63.50	47.60	—	68.6	109.60	23.40	M 8
C 220ALA 2F5	63.50	52.00	31.00	66.6	107.40	23.40	9.20
C 2122HA 1F3	76.20	57.20	—	79.3	121.58	27.80	14.00
C 224AHA 2F9	76.20	72.00	40.00	79.3	121.40	27.80	13.00
C 224AHK 2F2	76.20	72.00	40.00	79.3	121.40	27.80	13.00
C 2162A 2F1	101.60	76.20	38.10	104.7	151.50	36.50	18.00
C 2162HA 2F2	101.60	36.50	38.10	104.7	151.60	36.50	18.00
C 2162HA 2F3	101.60	76.20	38.10	120.0	167.00	36.50	13.10
C 2162HF 1A2	101.60	76.20	38.10	104.6	151.60	36.50	13.10
C 2162HK 1-M 8	101.60	76.20	—	110.0	149.60	37.50	M 8


双节距输送链附件

Double pitch conveyor chain attachments


AA1

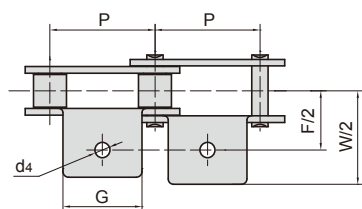


AA2

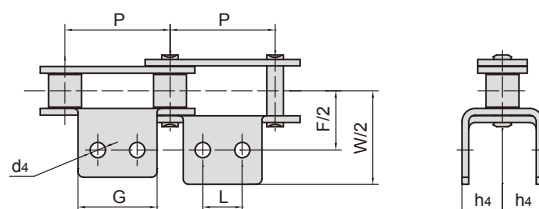

KK1

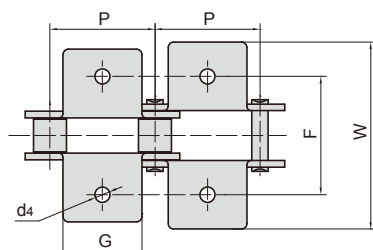


KK2

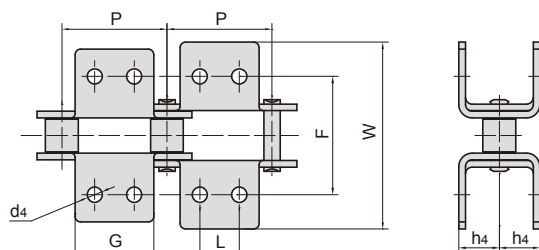

东华链号 Donghua Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	F	W	h4	d4
		mm	mm	mm	mm	mm	mm	mm
C 208A C 208AL	C 2040 C 2042	25.40	19.1	9.5	25.4	39.6	9.10	3.4
C 208B C 208BL		25.40	23.2	12.7	25.4	39.6	9.10	4.5
C 210A C 210AL	C 2050 C 2052	31.75	23.8	11.9	31.8	49.0	11.10	5.5
C 212A C 212AL	C 2060 C 2062	38.10	28.6	14.3	42.9	67.8	14.70	5.5
C 212AH C 212AHL	C 2060H C 2062H	38.10	28.6	14.3	42.9	67.8	14.70	5.5
C 216A C 216AL	C 2080 C 2082	50.80	38.1	19.1	55.6	87.8	19.10	6.8
C 216AH C 216AHL	C 2080H C 2082H	50.80	38.1	19.1	55.6	87.8	19.10	6.8
100HAA1F1		31.75	35.0	-	71.2	93.4	35.75	8.0
A2050AA1F1		31.75	20.0	-	47.0	66.0	35.50	8.1
2060AA2F1		38.10	38.1	19.0	37.5	57.5	14.80	6.5
C 2062AA1F1		38.10	14.0	-	33.4	52.0	9.00	6.4
C 2080K1F4		50.80	38.1	-	80.0	112.0	15.30	8.5
C 2082HAA1F1		50.80	25.0	-	78.8	128.8	17.50	8.0
C 2082HAA1F2		50.80	25.0	-	77.8	127.8	17.50	12.0
C 2100HF6AA1		63.50	47.8	-	68.0	100.0	23.40	10.0
C 2120AA1F1		76.20	31.8	-	88.7	115.6	35.00	10.5
C 2122HAA1		76.20	57.2	-	79.3	121.4	27.80	11.0

双节距输送链附件





Double pitch conveyor chain attachments

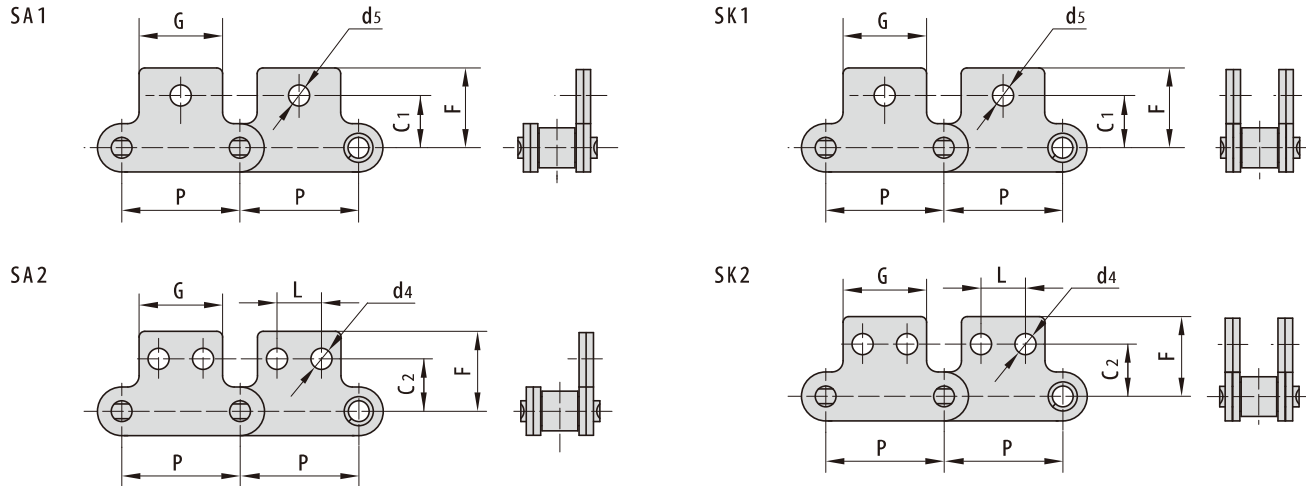

东华链号 Donghua Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	C ₁	C ₂	F	d ₄	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm
C 208A	C 2040	25.40	19.10	9.50	11.1	13.50	20.5	3.4	5.50
C 208AL	C 2042								
C 208B		25.40	23.20	12.70	11.1	13.50	20.5	4.5	5.50
C 208BL									
C 210A	C 2050	31.75	23.80	11.90	14.3	15.90	25.0	5.5	6.60
C 210AL	C 2052								
C 212A	C 2060	38.10	28.60	14.30	17.5	19.10	32.9	5.5	9.20
C 212AL	C 2062								
C 212AH	C 2060H	38.10	28.60	14.30	17.5	19.10	32.9	5.5	9.20
C 212AHL	C 2062H								
C 216A	C 2080	50.80	38.10	19.10	22.2	25.40	43.5	6.6	11.00
C 216AL	C 2082								
C 216AH	C 2080H	50.80	38.10	19.10	22.2	25.40	43.5	6.6	11.00
C 216AHL	C 2082H								
C 220A	C 2100	63.50	47.60	23.80	28.6	31.80	50.4	8.4	13.00
C 220AL	C 2102								
C 220AH	C 2100H	63.50	47.60	23.80	28.6	31.80	50.4	8.4	13.00
C 220AHL	C 2102H								
C 2042HW SA2		25.40	37.30	9.50	-	13.50	20.5	3.4	-
C 2050HW SA2F1		31.75	46.75	31.75	-	15.90	25.0	5.5	-
C 2060SA2F1		38.10	28.60	14.30	-	19.10	26.1	5.5	-
C 2062H SK2F1		38.10	28.60	14.30	-	19.10	23.8	5.2	-
C 2060H SK1F1		38.10	28.60	-	17.3	-	30.0	-	11.80
C 216AH2F		50.80	38.10	19.10	-	25.40	43.5	6.5	-
C 2082F58SA1		50.80	38.50	-	27.0	-	39.5	-	8.10
C 2100HSA1		63.50	47.60	-	28.6	-	50.4	-	13.00
C 224ALS K2F1		76.20	57.20	28.60	-	37.30	59.9	-	11.00
C 2122H SA1F1		76.20	57.20	-	37.3	-	59.9	-	14.30
C 224AHL SA2F1		76.20	57.20	28.60	-	37.30	59.9	-	9.53
208B SK1F2		25.40	14.00	-	17.7	-	21.3	-	3.20
208B SK1F3		25.40	13.00	-	14.7	-	26.7	-	3.10
208B SK1F4		25.40	24.20	-	14.3	-	20.5	-	4.20

双节距输送链附件

Double pitch conveyor chain attachments

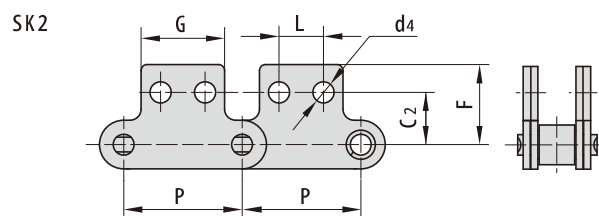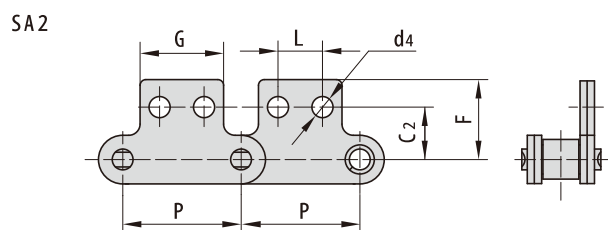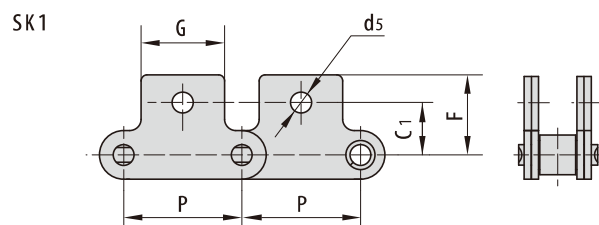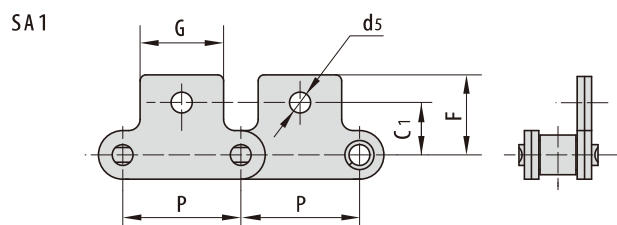


东华链号 Donghua Chain No.	P	G	L	C ₁	C ₂	F	d ₄	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm
C 2040F23SK0	25.40	19.10	-	-	-	25.70	-	-
C 208BSK2F2	25.40	23.20	12.70	-	13.02	20.17	4.50	-
C 208BSA2F2	25.40	31.80	22.00	-	18.30	22.80	4.50	-
C 2050SK1F2	31.75	24.80	-	17.00	-	36.00	-	15.00
C 2050SA0F6	31.75	46.75	-	-	-	15.50	-	-
C 210BSA2F3	31.75	30.00	18.00	-	21.00	28.00	5.50	-
C 2060HSF6SK2	38.10	28.60	14.30	-	19.10	32.90	6.50	-
C 2062HSA1F2	38.10	28.60	-	17.50	-	30.50	-	8.30
C 2060SK0F4	38.10	20.00	-	-	-	49.00	-	-
C 2082SA1F2	50.80	38.10	-	27.70	-	39.70	-	8.20
C 2080HF91	50.80	38.10	-	-	-	43.50	-	-
C 220AHSA2F1	63.50	47.60	23.80	-	31.80	50.40	8.70	-
C 224ALSK2F2	76.20	57.20	28.60	-	37.50	52.50	12.50	-
C 224AHSK1F2	76.20	57.20	-	43.80	-	59.02	-	17.60
C 224AHLA2F2	76.20	57.00	28.60	-	37.30	58.90	11.00	-
C 2160HSK0F1	101.60	40.00	-	-	-	17.50	-	-


双节距输送链附件

Double pitch conveyor chain attachments


SAA1

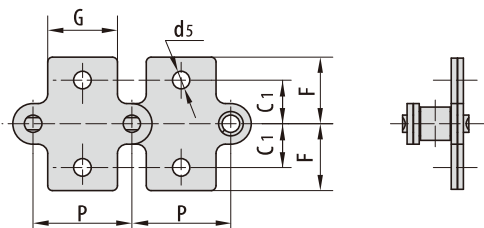


SKK1

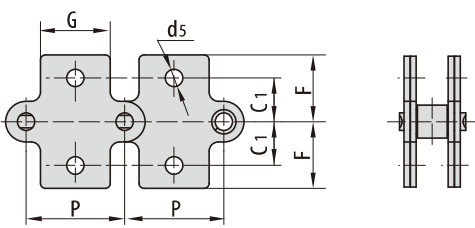

SAA2

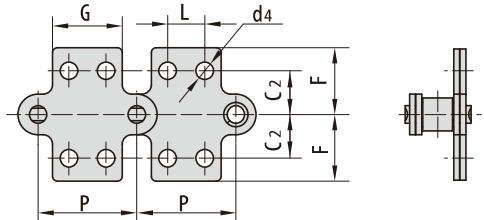


SKK2

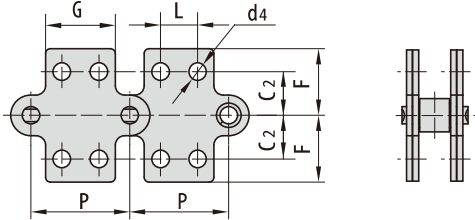

东华链号 Donghua Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	C ₁	C ₂	F	d ₄	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm
C 208A C 208AL	C 2040 C 2042	25.40	19.1	9.5	11.10	13.5	20.50	3.4	5.5
C 208B C 208BL		25.40	23.2	12.7	11.10	13.5	20.50	4.5	5.5
C 210A C 210AL	C 2050 C 2052	31.75	23.8	11.9	14.30	15.9	25.00	5.5	6.6
C 212A C 212AL	C 2060 C 2062	38.10	28.6	14.3	17.50	19.1	32.90	5.5	9.2
C 212AH C 212AHL	C 2060H C 2062H	38.10	28.6	14.3	17.50	19.1	32.90	5.5	9.2
C 216A C 216AL	C 2080 C 2082	50.80	38.1	19.1	22.20	25.4	43.50	6.6	11.0
C 216AH C 216AHL	C 2080H C 2082H	50.80	38.1	19.1	22.20	25.4	43.50	6.6	11.0
C 2040F23SAA1		25.40	19.1	—	11.15	—	19.75	—	5.4
C 2060HSAA1F1		38.10	24.0	—	25.40	—	43.50	11.0	—
C 2120SAA2F1		76.20	45.0	30.0	—	28.0	35.00	6.5	10.5

双节距输送链附件


Double pitch conveyor chain attachments

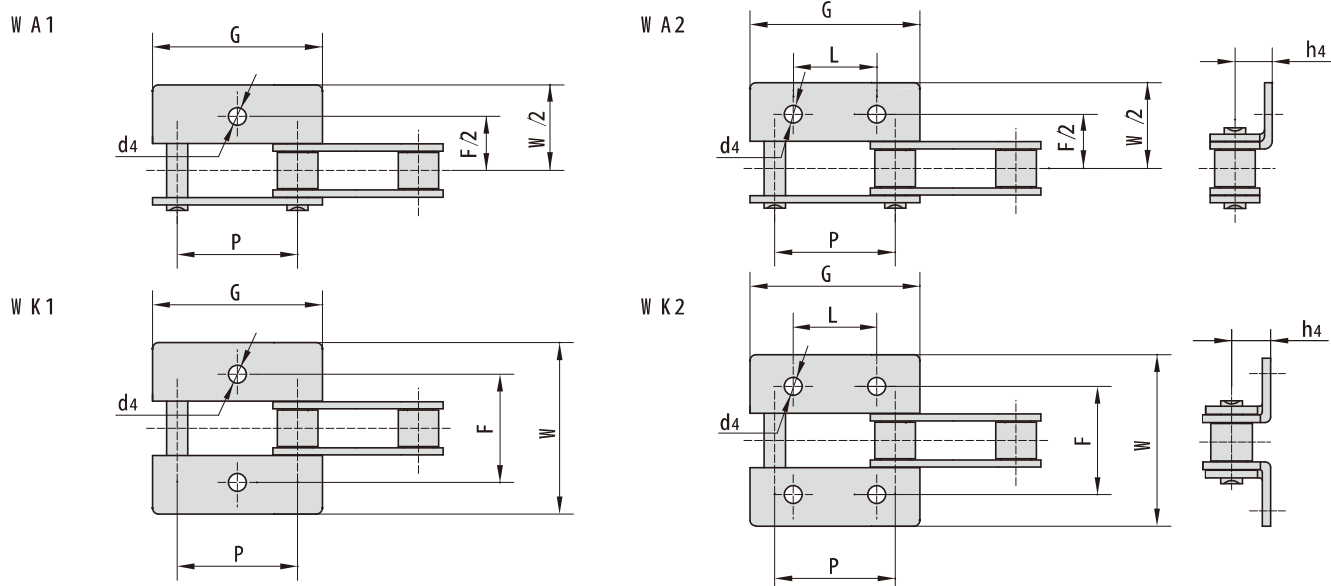

东华链号 Donghua Chain No.	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C 2040HW K1F2	25.40	37.00	-	62.00	110.00	10.65	7.00
C 2040K1F2	25.40	37.00	-	62.00	110.00	9.10	7.00
C 2042HF1	25.40	37.40	-	42.50	65.50	6.00	7.00
C 208BK2F	25.40	37.20	12.70	28.00	42.00	8.50	5.50
C 208BW A2F1	25.40	37.20	25.40	28.00	42.00	8.50	5.50
C 2052W A1F2	31.75	46.80	-	76.20	95.20	7.50	7.10
C 2052W A2F4	31.75	46.75	30.00	48.52	65.52	15.00	6.50
212BW K2F1	38.10	54.10	19.00	35.20	54.80	12.20	6.40
212BW K2F2	38.10	54.10	19.00	35.00	54.80	12.70	7.00
C 2060HW K2F7	38.10	56.00	32.00	42.90	72.00	14.70	5.50
C 2060W A2	38.10	56.10	38.10	42.90	58.50	14.70	5.50
C 2062HW A1F4	38.10	55.60	-	76.20	95.30	8.70	7.10
C 2062HW A1F5	38.10	56.00	-	76.00	95.00	9.00	7.30
C 2062HW A2	38.10	56.10	14.30	42.90	67.80	14.70	5.50
C 2062HW A2F4	38.10	55.60	38.10	76.20	95.30	8.70	7.10
C 2062HW A2F7	38.10	63.50	38.10	76.20	96.00	17.50	6.35
C 2062W A2F1	38.10	56.10	38.10	42.90	67.80	14.70	6.50
C 2062W K2F2	38.10	56.10	38.10	43.00	68.00	14.70	7.80
216BW A2F1	50.80	71.80	25.40	58.00	80.00	17.00	8.40
C 2080HW K1F1	50.80	74.80	-	55.60	87.80	19.10	10.50
C 2080HW K2	50.80	74.80	50.80	55.60	87.80	19.10	6.80
C 2082F12	50.80	74.80	50.80	55.60	88.00	19.10	8.40
C 2082F24	50.80	74.80	56.80	55.60	87.80	19.10	6.80
C 2082HF1A2	50.80	74.80	30.00	60.00	84.00	18.00	8.50
C 2082HW A1F1	50.80	76.20	-	57.20	82.60	35.60	12.70
C 2082W A2F4	50.80	74.80	50.80	55.60	88.00	14.00	7.00
C 216ALF5	50.80	74.80	44.30	62.20	88.00	19.10	7.00
C 2100HW A2	63.50	93.50	63.50	66.60	107.40	23.40	8.40
C 2102HK2-M 8	63.50	47.60	23.80	66.60	107.50	23.40	M 8
C 220ALW A2F1	63.50	93.50	50.00	97.80	127.80	15.00	13×9
C 224AHW K2	76.20	111.90	76.20	79.30	111.90	27.80	11.00


双节距输送链附件

Double pitch conveyor chain attachments

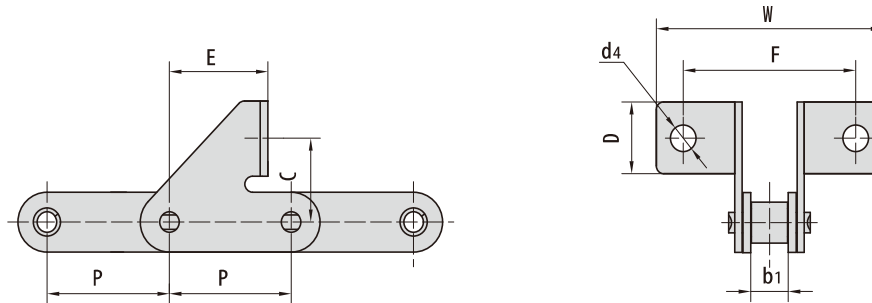


东华链号 Donghua Chain No.	P	b ₁	F	W	C	D	E	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C 2050SD	31.75	9.40	45.0	59.0	21.2	18.0	25.7	6.6
C 2062H 0 R S D F 1	38.10	12.57	52.0	67.0	30.0	22.5	31.4	6.3

C 2052A 1F1

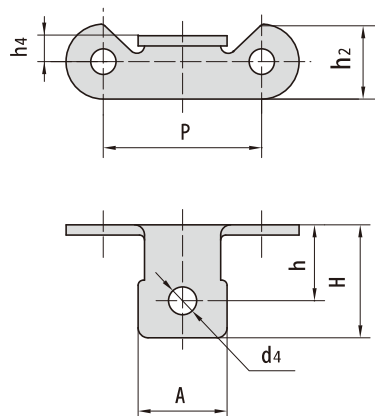

C 2062HA 1F4

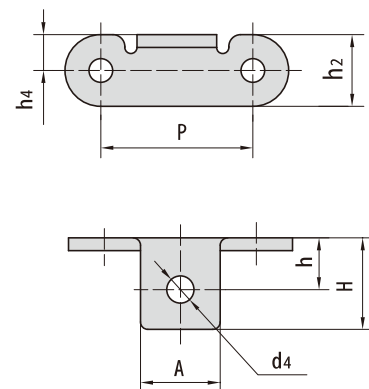

东华链号 Donghua Chain No.	P	A	h	H	h ₂	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
C 2052A 1F1	31.75	17.8	14.7	22.6	15.0	5.2	6.5
C 2062HA 1F4	38.10	20.0	13.0	23.0	18.0	9.0	6.8

双节距输送链附件

Double pitch conveyor chain attachments





东华链号 Donghua Chain No.	P	A	h	H	h ₂	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
C 2052HF6	31.75	16.00	18.30	28.20	15.00	4.92	6.00

东华链号 Donghua Chain No.	P	h ₁	h ₂	H	A	B	C	d ₃
	mm	mm	mm	mm	mm	mm	mm	mm
C 2050F71	31.75	20.50	56.00	95.00	53.10	12.25	12.50	9.00
C 224AF13	76.20	49.00	131.40	216.00	120.00	21.90	17.00	13.00

东华链号 Donghua Chain No.	P	h	h ₄	H	d ₄
	mm	mm	mm	mm	mm
2060HK 1F27	38.10	13.40	14.00	21.87	8.50
2060HK 1F28	38.10	13.40	14.00	21.87	10.00
*C 2060K 1F29	38.10	13.46	10.50	22.76	8.50

*直链板
*Straight side plates

东华链号 Donghua Chain No.	P	h ₂	G	F	W	d ₄	h
	mm	mm	mm	mm	mm	mm	mm
C 2060HF81	38.10	18.00	27.20	50.80	75.14	6.75	5.90

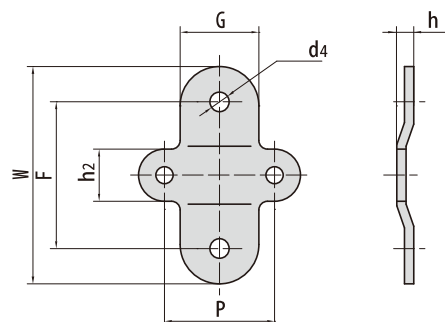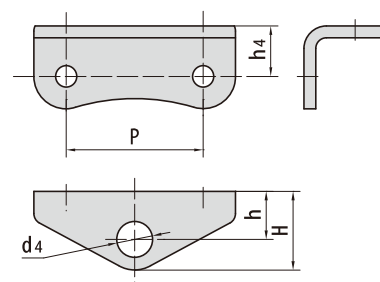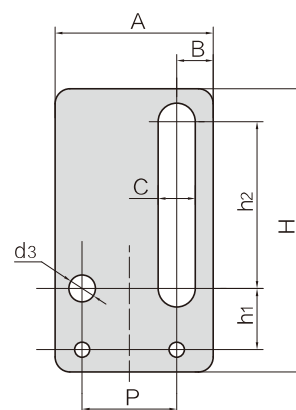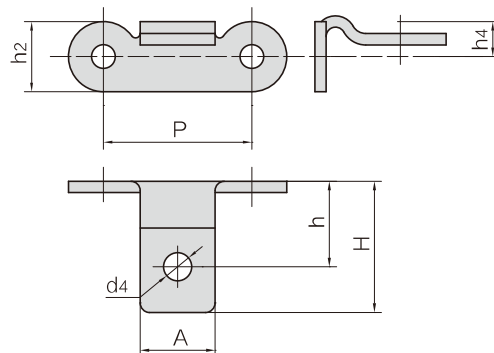

双节距输送链附件





Double pitch conveyor chain attachments

东华链号 Donghua Chain No.	P	G	h ₄	h	H	d ₄
	mm	mm	mm	mm	mm	mm
C 2060HK 1F31	38.10	20.30	14.70	18.10	27.600	10.50
C 2060K 1F37	38.10	21.40	14.70	15.00	24.200	10.50

东华链号 Donghua Chain No.	P	h ₂	h	h ₄	H	L	G	d ₄	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2062HA 2F91	38.10	17.50	15.05	8.00	27.00	14.30	28.00	5.50	10.60
C 220ALA 2F7	63.50	30.00	31.00	15.00	46.00	30.40	52.00	9.00	-
C 220ALA 2F8	63.50	30.00	27.80	15.00	48.20	23.80	47.60	9.20	-

东华链号 Donghua Chain No.	P	h ₂	h ₄	h	H	G	d ₄
	mm	mm	mm	mm	mm	mm	mm
C 2062HA 1F29	38.10	18.00	10.40	15.30	25.40	20.00	M 6
C 2082HA 1F25	50.80	24.00	11.00	22.68	35.18	25.00	M 8


东华链号 Donghua Chain No.	P	L	G	C	F	d ₄
	mm	mm	mm	mm	mm	mm
C 2050HW SA2F1	31.75	31.75	46.75	15.90	25.00	5.50

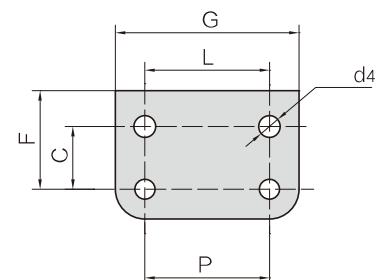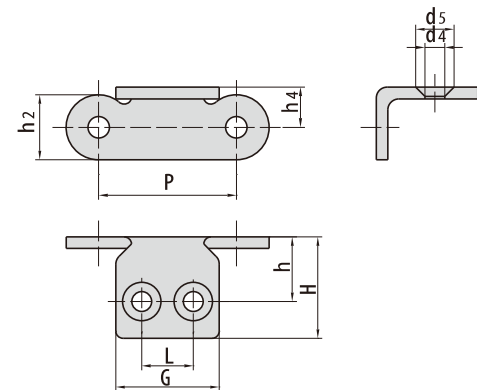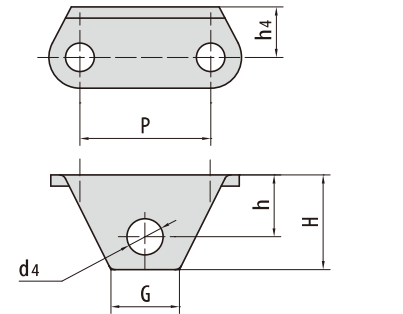


双节距输送链附件

Double pitch conveyor chain attachments


东华链号 Donghua Chain No.	P	h ₂	h ₄	L	G	C	F	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C 2050F47	31.75	15.00	7.22	11.90	23.80	21.00	30.10	5.50

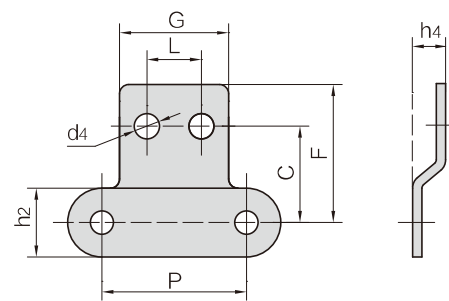


东华链号 Donghua Chain No.	P	G	h ₂	h	H	d ₄
	mm	mm	mm	mm	mm	mm
C 2062HF84	38.10	16.00	17.00	16.40	24.40	5.94
C 2062HF112	38.10	15.20	18.00	15.93	23.53	7.15

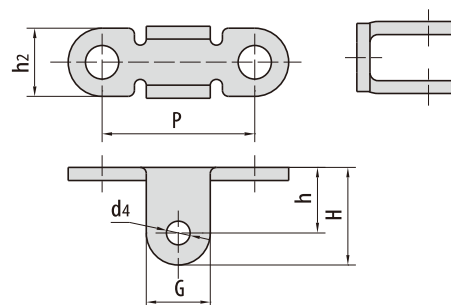

东华链号 Donghua Chain No.	P	h ₂	h	A	B	d ₃	d ₄
	mm	mm	mm	mm	mm	mm	mm
C 2062F85	38.10	18.00	33.00	47.66	25.00	9.00	8.33
C 2062HF101	38.10	18.00	33.50	47.66	25.00	9.00	8.33

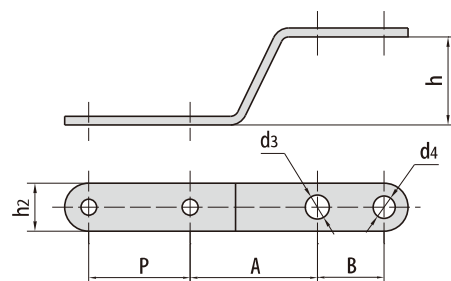


东华链号 Donghua Chain No.	P	G	L ₁	L ₂	C	h	H	α ₁	α ₂
	mm	mm	mm	mm	mm	mm	mm		
C 2062F102	38.10	72.00	24.00	24.00	9.00	30.00	45.00	40°	40°

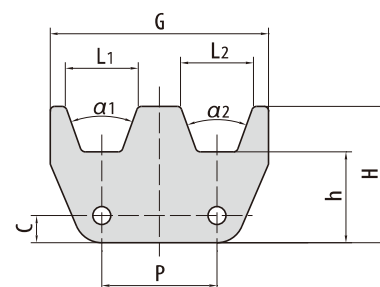


双节距输送链附件

Double pitch conveyor chain attachments


东华链号 Donghua Chain No.	P	G	h	H	A	B	C	D	E	d4
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2062F82	38.10	74.00	60.00	80.00	25.00	10.00	5.00	30.00	55.00	M 6




东华链号 Donghua Chain No.	P	G	h	H	L	L1	L2
	mm	mm	mm	mm	mm	mm	mm
C 2062HU 1F1	38.10	62.00	25.00	34.00	26.30	76.00	102.00

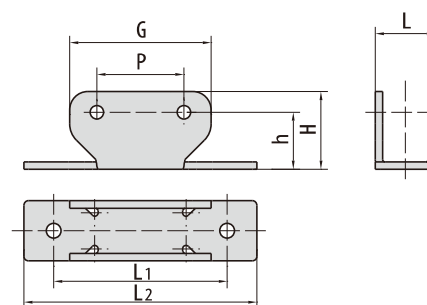

东华链号 Donghua Chain No.	P	h2	h4	h	H	d4
	mm	mm	mm	mm	mm	mm
C 2082F1AA1-D3	50.80	24.00	12.00	19.50	26.00	6.00

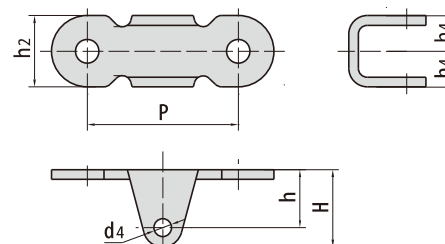


东华链号 Donghua Chain No.	P	G	h2	h4	h	H	d4
	mm	mm	mm	mm	mm	mm	mm
C 2082HF76	50.80	30.00	24.00	9.50	21.20	34.20	8.50

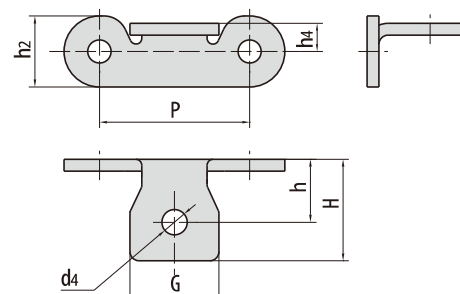


双节距输送链附件

Double pitch conveyor chain attachments


东华链号 Donghua Chain No.	P	h ₂	h	B	α
	mm	mm	mm	mm	
C 2162F1	101.60	47.80	120.00	30.00	21°

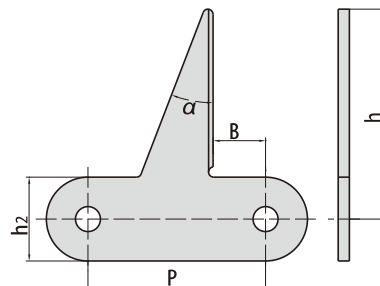


东华链号 Donghua Chain No.	P	H	d ₄
	mm	mm	mm
220AHF1-1C	63.50	50.80	25.40

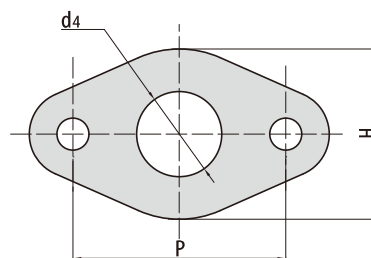

东华链号 Donghua Chain No.	P	h ₂	C	L	F	G	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm
C 210BSA2F2	31.75	14.70	48.00	15.00	83.00	18.00	M 4	1.70
C 210BSA2F4	31.75	14.70	48.00	15.00	83.00	18.00	M 4	1.42

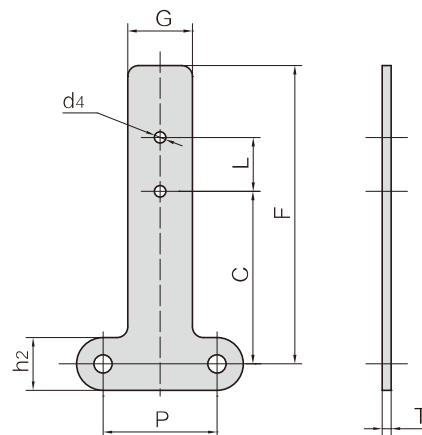


东华链号 Donghua Chain No.	P	h ₁	C	L	F	G	d ₄
	mm	mm	mm	mm	mm	mm	mm
208BF49	25.40	8.00	31.49	20.00	80.00	16.00	5.50

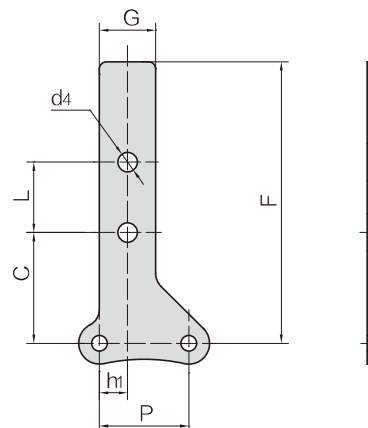


双节距输送链附件

Double pitch conveyor chain attachments


东华链号 Donghua Chain No.	P	G	G ₁	h	h ₁	α	γ
	mm	mm	mm	mm	mm		
208BF41	25.40	13.00	60.00	102.60	16.20	90°	96°
208BF43	25.40	14.66	60.00	94.10	16.20	90°	96°
C 208BF46	25.40	11.00	59.00	111.50	16.00	91°	102°

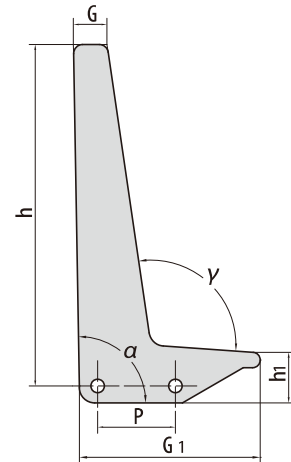

东华链号 Donghua Chain No.	P	G	h	H
	mm	mm	mm	mm
208BF42	25.40	7.70	74.10	80.00

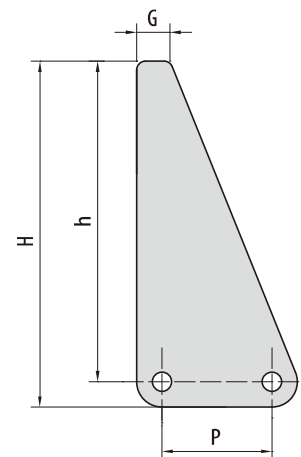


东华链号 Donghua Chain No.	P	G	h	h ₁	H	h ₄
	mm	mm	mm	mm	mm	mm
210BF3	34.25	13.00	16.20	7.00	23.60	10.50

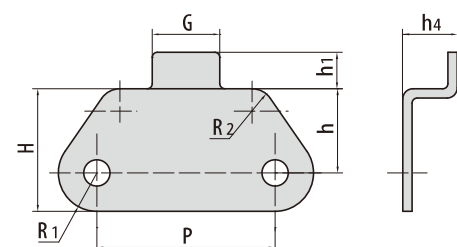


双节距带特殊附件输送链

Double pitch conveyor chains with special attachments


东华链号 Donghua Chain No.	P	b ₁	C	F	d ₃
	mm	mm	mm	mm	mm
C 2042F4	25.40	7.85	18.50	28.50	M 8
C 2062HF86	38.10	12.57	28.60	39.60	10.50
C 2062HF87	38.10	12.57	30.40	41.40	10.50

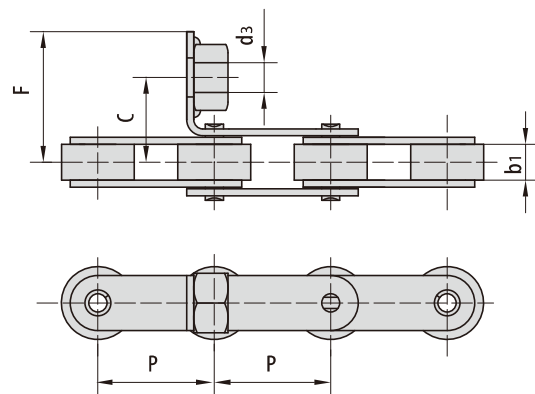

东华链号 Donghua Chain No.	P	b ₁	h ₂	A	B	C
	mm	mm	mm	mm	mm	mm
C 2050F9	31.75	9.4	15.0	5.0	21.0	10.0

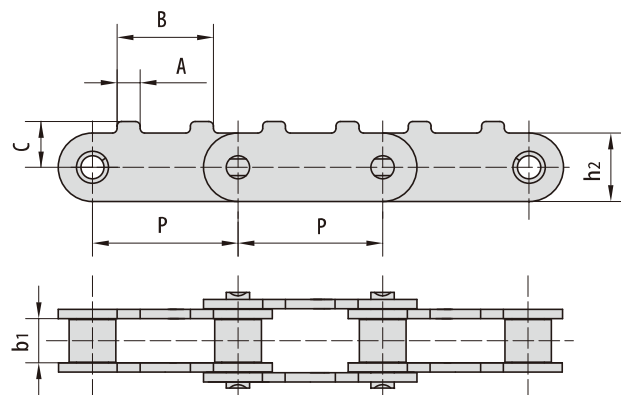


东华链号 Donghua Chain No.	P	b ₁	G	L	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C 2050HF2	31.75	9.4	18.0	13.0	36.1	56.5	13.5	M 5

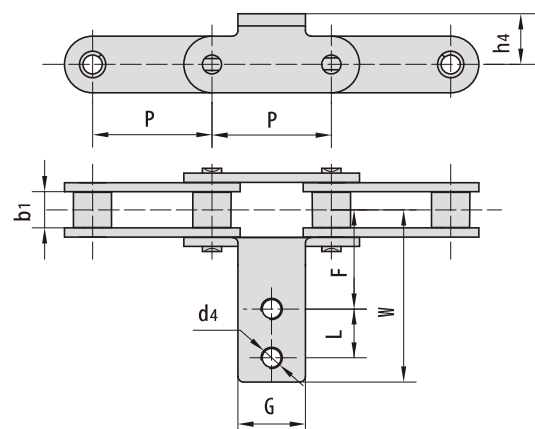


双节距带特殊附件输送链

Double pitch conveyor chains with special attachments


东华链号 Donghua Chain No.	P	b ₁	C	d	R
	mm	mm	mm	mm	mm
C 2062F5	38.1	12.57	28.0	30	20

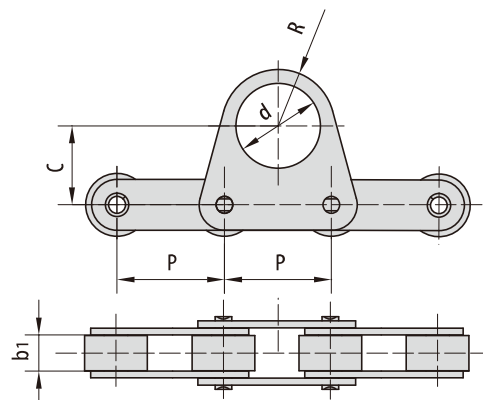

东华链号 Donghua Chain No.	P	b ₁	C	F	d ₄	h ₄
	mm	mm	mm	mm	mm	mm
C 2042F8	25.4	7.85	17.75	28	8.5	10
C 2062HF13	38.1	12.57	31.9	42.9	6	9.8
C 224AF2	76.2	25.22	52.7	77.75	13	26.8

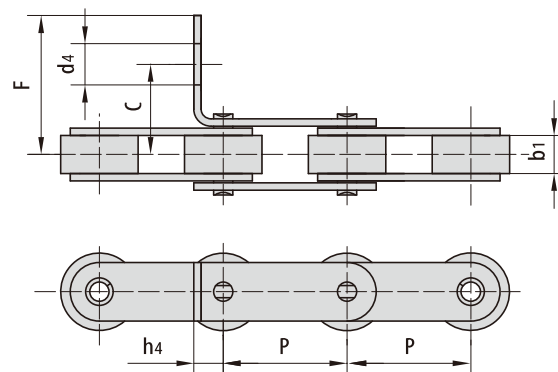


东华链号 Donghua Chain No.	P	b ₁	C	h ₂	d ₁
	mm	mm	mm	mm	mm
C 2062F6	38.1	12.57	3.0	23.0	22.23
C 2082F8	50.8	15.75	3.5	25.0	28.58

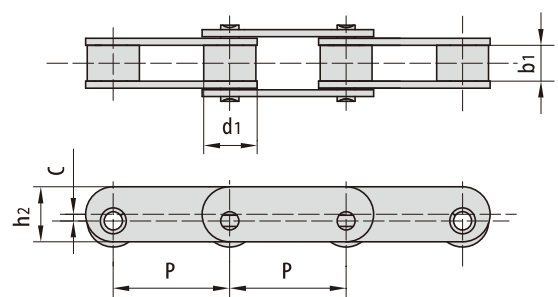


双节距带特殊附件输送链

Double pitch conveyor chains with special attachments

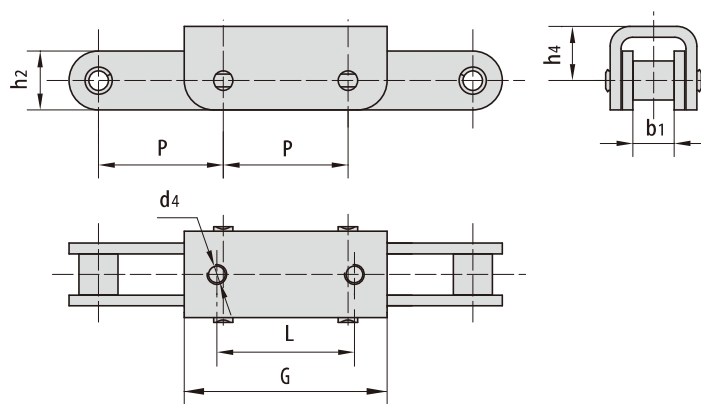


东华链号 Donghua Chain No.	P	b ₁	L	G	d ₄	h ₂	h ₄
	mm	mm	mm	mm	mm	mm	mm
C 2060H-U 1F1	38.1	12.57	42.0	62.0	M 6	18.0	16.5

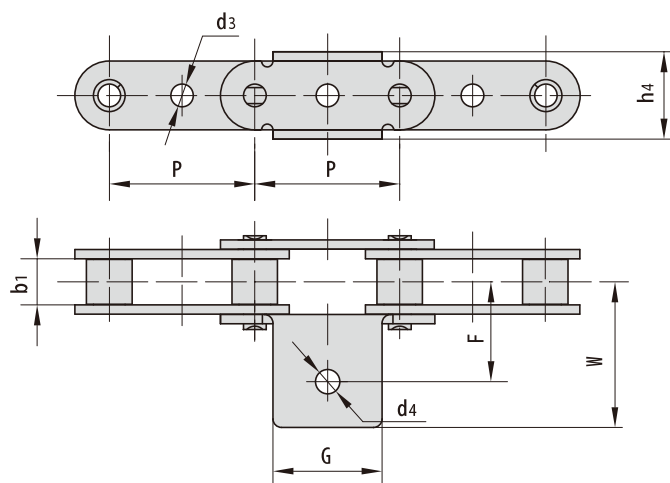


东华链号 Donghua Chain No.	P	b ₁	G	F	W	h ₄	d ₄	d ₃
	mm	mm	mm	mm	mm	mm	mm	mm
C 2080K 1F4	50.8	15.75	38.1	40.0	56.0	30.5	8.5	-
C 2080HG F1	50.8	15.75	36.0	38.0	46.0	28.4	6.0	8.1

双节距带特殊附件输送链

Double pitch conveyor chains with special attachments

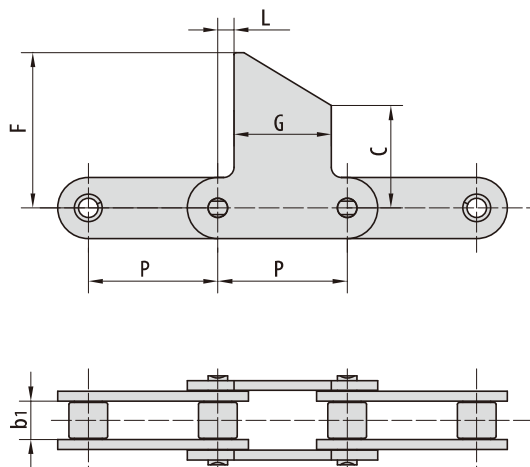

东华链号 Donghua Chain No.	P	b ₁	L	G	C	F
	mm	mm	mm	mm	mm	mm
C 2060F110	38.10	12.57	5.00	30.00	15.00	30.00
C 2100HF4	63.50	18.90	7.90	47.80	50.80	76.20
C 2100HF5	63.50	18.90	7.90	47.80	95.30	133.40

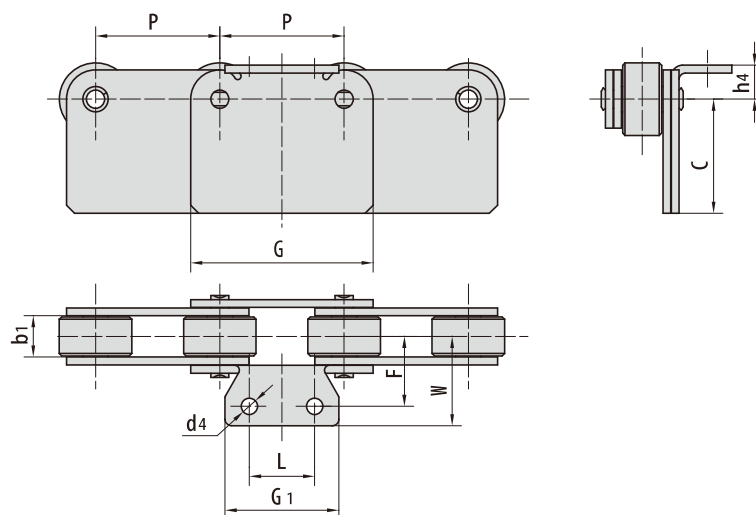


东华链号 Donghua Chain No.	P	b ₁	L	G ₁	G	h ₄	d ₄	C	F	W
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2082HW SA0F1	50.80	15.75	—	38.10	74.80	19.10	8.50	64.90	27.80	40.50
C 2082HF93	50.80	15.75	—	38.10	74.80	19.10	—	64.90	—	40.50
C 224ALK2F2	76.20	25.22	40.00	70.00	111.90	20.80	10.00	70.00	43.00	55.00


双节距带特殊附件输送链

Double pitch conveyor chains with special attachments


东华链号 Donghua Chain No.	P	b ₁	L ₁	L ₂	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C 2080HF6	50.8	15.75	43.0	—	60.0	160.0	20.45	5.5
C 2080HF11	50.8	15.75	30.0	—	110.0	210.0	19.00	8.2
C 2080HF78	50.8	15.75	42.5	—	63.5	163.5	21.20	5.0
C 2100HF2	63.5	18.90	52.5	52.5	70.0	300.0	30.00	5.5
C 224AHF8A2	76.2	25.22	40.0	—	118.0	238.0	28.50	12.0

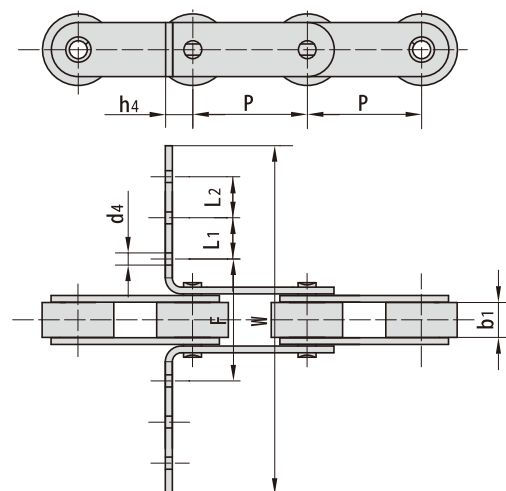

东华链号 Donghua Chain No.	P	b ₁	G	L	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C 2082HF4	50.8	15.75	28.6	50.8	57.4	181.4	8.7	11.1

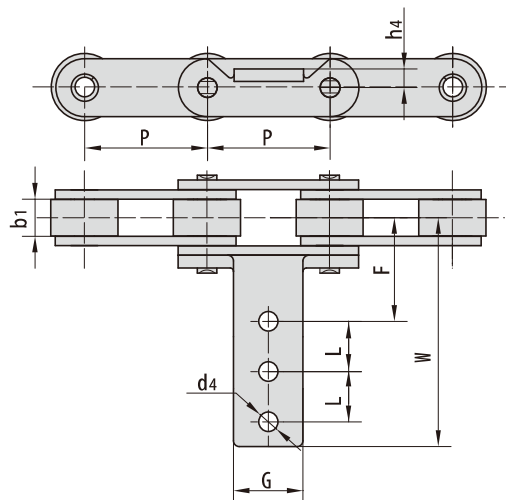


东华链号 Donghua Chain No.	P	b ₁	h ₂	G	L	F	W	d ₄	C
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2050A6	31.75	9.4	15.0	16.0	—	23.4	32.8	5.5	0.50
C 2052F11	31.75	9.4	15.0	16.0	—	26.6	34.6	6.2	0.50
C 2062HF63A2F1	38.10	25.4	18.0	28.6	14.4	34.5	40.0	5.2	1.43
C 2062HF63A2F4	38.10	25.4	18.0	28.6	14.4	69.0	87.0	5.2	1.45
C 2062HF77A2	38.10	25.4	18.0	33.0	16.3	39.0	47.0	8.5	5.30

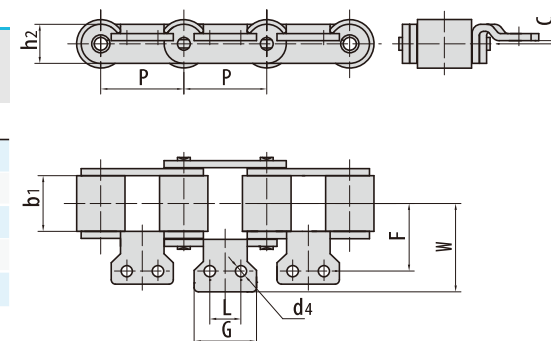

双节距带特殊附件输送链

Double pitch conveyor chains with special attachments

GK1

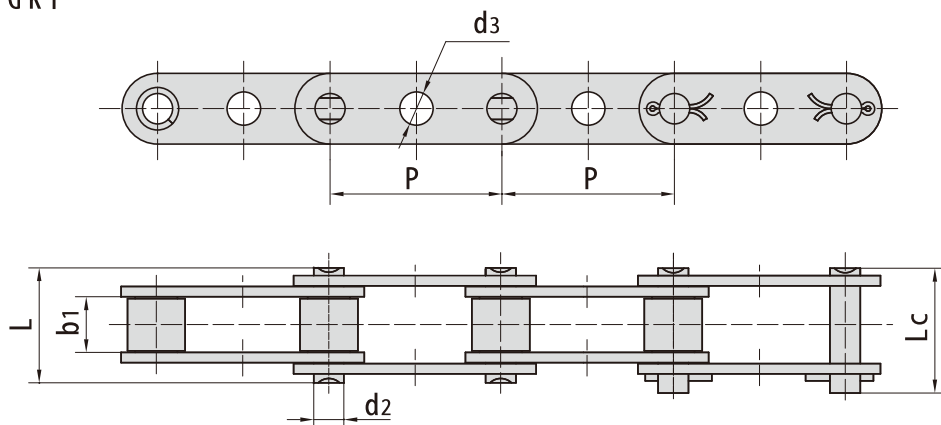


ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	b1	d2	d3	L	Lc
		mm	mm	mm	mm	mm	mm
C 208A	C 2040	25.40	7.85	3.96	4.1	16.6	18.8
C 208AL	C 2042						
C 210A	C 2050	31.75	9.40	5.08	5.1	20.7	23.3
C 210AL	C 2052						
C 212A	C 2060	38.10	12.57	5.94	6.1	25.9	28.3
C 212AL	C 2062						
C 212AH	C 2060H	38.10	12.57	5.94	6.1	29.2	31.6
C 212AHL	C 2062H						
C 216A	C 2080	50.80	15.75	7.92	8.1	32.7	36.5
C 216AL	C 2082						
C 216AH	C 2080H	50.80	15.75	7.92	8.1	36.2	39.4
C 216AHL	C 2082H						
C 220A	C 2100	63.50	18.90	9.53	10.1	40.4	44.7
C 220AL	C 2102						
C 220AH	C 2100H	63.50	18.90	9.53	10.1	43.6	46.9
C 220AHL	C 2102H						

双节距带特殊附件输送链

Double pitch conveyor chains with special attachments

GK1

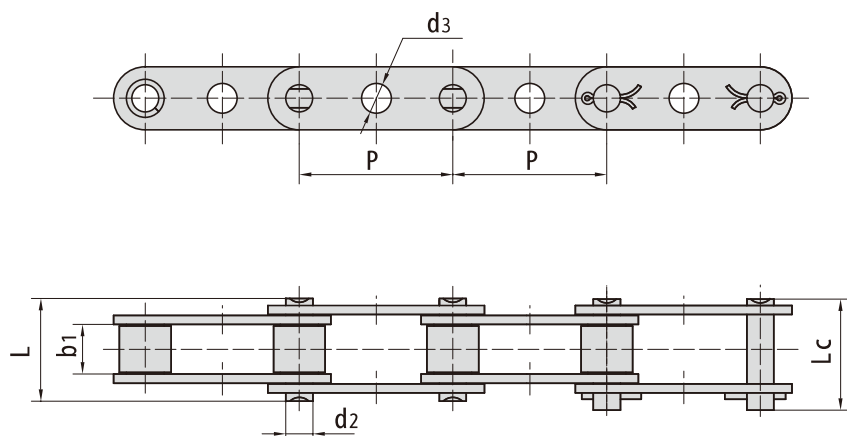


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L	L _c
	mm	mm	mm	mm	mm	mm
C 2040G KF6	25.40	7.85	3.96	6.10	16.60	18.80
C 2040G KF7	25.40	7.85	3.96	6.35/7.92	17.00	18.80
C 2050F 73G K	31.75	9.40	5.08	6.10	21.38	23.98
C 2050G KF10	31.75	9.40	5.08	5.00	20.70	23.30
C 2050G KF13	31.75	9.40	5.08	5.20	20.70	23.30
C 2050G KF14	31.75	9.40	5.08	6.00	20.70	23.30
C 2050G KF15	31.75	9.40	5.08	6.50	20.70	23.30
C 2050G KF2	31.75	9.40	5.08	8.10	20.70	22.20
C 2050G KF3	31.75	9.40	5.08	8.10	20.70	22.20
C 2050G KF4	31.75	9.40	5.08	7.00	20.70	22.20
C 2050G KF5	31.75	9.40	5.08	7.10	20.70	22.20
C 2050G KF6	31.75	9.40	5.08	6.00	20.70	22.20
C 2050G KF7	31.75	9.40	5.08	6.10	20.70	22.20
C 2050G KF8	31.75	9.40	5.08	8.30	20.70	22.20
C 2050HG K	31.75	9.40	5.08	8.20	22.10	23.40
C 2050HG KF1	31.75	9.40	5.08	7.00	22.10	23.40
C 2052HG KF3	31.75	9.40	5.08	6.00	22.10	23.40
C 2050HG KF4	31.75	9.40	5.08	8.10	22.10	23.40
C 2050HG KF5NP	31.75	9.40	5.08	6.50	22.10	24.50
C 2050HG KF17	31.75	9.40	5.08	6.10	22.10	24.50
C 2060G KF1	38.10	12.57	5.94	8.00	25.90	27.70
C 2060G KF2	38.10	12.57	5.94	8.10	25.90	27.70
C 2060G KF3	38.10	12.57	5.94	6.20	25.90	27.70
C 2060G KF8	38.10	12.57	5.94	8.80	25.90	27.70
C 2060G KF18	38.10	12.57	5.94	5.50/10.00	25.90	28.30
C 2060HG KF3	38.10	12.57	5.94	8.20	29.20	31.60

双节距带特殊附件输送链

Double pitch conveyor chains with special attachments

GK1

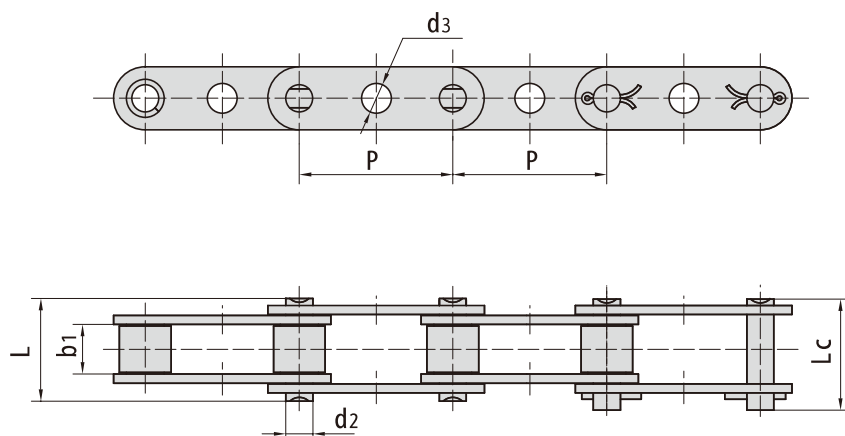


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L	L _c
	mm	mm	mm	mm	mm	mm
C 2060HG KF4	38.10	12.57	5.94	8.30	29.20	31.60
C 2060HG KF5	38.10	12.57	5.94	6.00	29.20	31.60
C 2060HG KF6	38.10	12.57	5.94	8.33	29.20	31.60
C 2060HG KF7	38.10	12.57	5.94	10.00	29.20	31.60
C 2060HG KF10	38.10	12.57	5.94	8.80	29.20	31.60
C 2060HG KF22	38.10	12.57	5.94	8.20	28.70	29.30
C 2060HG KF24	38.10	12.57	5.94	10.60	29.20	31.60
C 2060HF9	38.10	12.57	5.94	7.95	29.20	31.60
C 2060HF69G K	38.10	12.57	5.94	8.33	28.70	30.80
C 2062G KF25	38.10	12.57	5.94	8.00	25.90	28.30
C 2080HG KF2	50.80	15.75	7.92	7.90	36.20	39.40
C 2080HG KF6	50.80	15.75	7.92	11.00	36.20	39.40
C 2080HG KF12	50.80	15.75	7.92	10.97	36.20	38.90
C 2082G KF14	50.80	15.75	7.92	10.97	36.20	38.90
C 2082G KF15	50.80	15.75	7.92	10.95	36.20	38.90
C 2082G KF16	50.80	15.75	7.92	11.00	32.70	36.50
C 2082G KF17	50.80	15.75	7.92	10.30	32.70	36.50
C 2100F26G K	63.50	10.40	9.53	14.60/17.50	23.90	—
C 2100SLRF26G K	63.50	10.10	9.53	14.58/17.60	23.80	—
C 220AG K	63.50	18.90	9.53	8.00	40.40	44.70
C 208BG KF1	25.40	7.75	4.45	6.00	16.70	18.20
C 208BG KF3	25.40	7.75	4.45	4.50	17.70	20.10
C 208BG KF4	25.40	7.75	4.45	6.10	16.70	18.20
C 208BG KF6	25.40	7.75	4.45	6.00	16.70	19.30
C 208BG KF7SLR	25.40	7.75	4.45	6.00	17.70	20.10
C 210BF2G K	31.75	7.00	5.08	5.97	16.50	—


双节距加长销输送链

Double pitch conveyor chains with extended pins

D 1

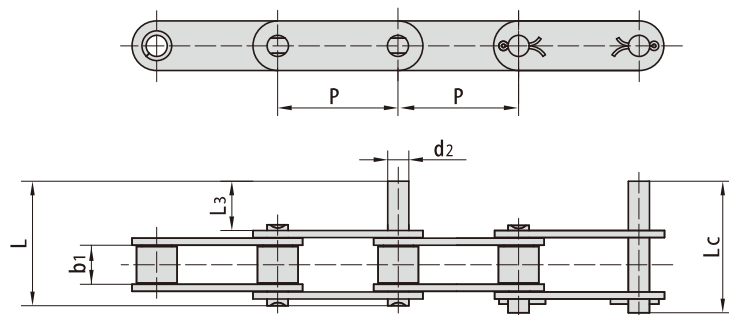


D 3

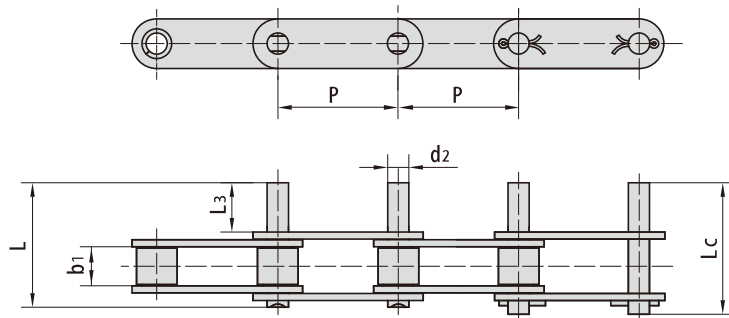

ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	b ₁	d ₂	L ₃	L	L _c
		mm	mm	mm	mm	mm	mm
C 208A	C 2040	25.40	7.85	3.96	9.5	25.1	26.2
C 208AL	C 2042						
C 210A	C 2050	31.75	9.40	5.08	11.9	31.3	33.1
C 210AL	C 2052						
C 212A	C 2060	38.10	12.57	5.94	14.3	38.6	40.6
C 212AL	C 2062						
C 212AH	C 2060H	38.10	12.57	5.94	14.3	42.0	43.8
C 212AHL	C 2062H						
C 216A	C 2080	50.80	15.75	7.92	19.1	50.3	53.3
C 216AL	C 2082						
C 216AH	C 2080H	50.80	15.75	7.92	19.1	53.5	55.0
C 216AHL	C 2082H						
C 220A	C 2100	63.50	18.90	9.53	23.8	61.8	66.1
C 220AL	C 2102						
C 220AH	C 2100H	63.50	18.90	9.53	23.8	65.0	68.3
C 220AHL	C 2102H						
C 224AH	C 2120H	76.20	25.22	11.10	28.6	79.6	83.6
C 224AHL	C 2122H						
C 232AH	C 2160H	101.60	31.75	14.27	38.1	103.0	107.8
C 232AHL	C 2162H						

双节距加长销输送链


Double pitch conveyor chains with extended pins

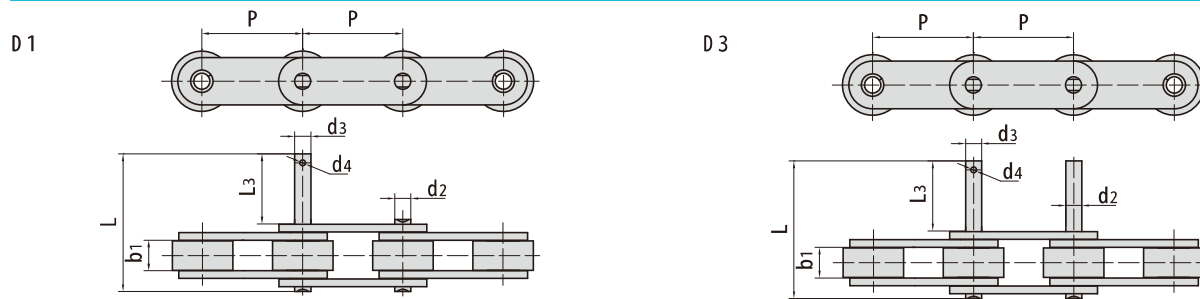


东华链号 Donghua Chain No.	P	b1	L3	L	d2	d3	d4
	mm	mm	mm	mm	mm	mm	mm
2040-D 3F12	25.400	7.85	8.00	23.70	3.96	6.00	-
208B-D 3F17	25.400	7.75	19.40	35.10	4.45	4.65	1.60
C 2040-D 1F23	25.400	7.85	37.00	52.60	3.96	5.50	-
C 2040-D 3F13	25.400	7.85	31.75	47.35	3.96	7.94	-
C 2040-D 3F15	25.400	7.85	20.40	36.00	3.96	4.45	1.50
C 2042-D 1F20	25.400	7.85	35.00	51.00	3.96	6.00	-
C 208B-D 3F19	25.400	7.75	15.20	31.00	4.48	8.30	-
210B-D 1F3	31.750	9.65	33.00	51.40	5.08	8.00	-
C 2052-D 13F2	31.750	9.40	23.40	43.00	5.08	6.00	-
C 2052-D 1F23	31.750	9.40	40.00	59.70	5.08	6.35	-
C 2052-D 1F27	31.750	9.40	20.00	41.10	5.08	9.00	-
C 2052-D 1F28	31.750	9.40	21.00	42.10	5.08	9.30	-
C 2052-D 1F52	31.750	9.40	30.00	49.50	5.08	9.00	-
C 2052-D 1F54	31.750	9.40	22.00	41.60	5.08	5.08	1.80
C 2052-D 1F71	31.750	9.40	20.00	41.10	5.08	7.00	-
C 2052-D 1F72	31.750	9.40	50.00	71.20	5.08	8.00	-
C 2052-D 3F20	31.750	9.40	22.00	41.60	5.08	5.70	-
C 2052F56-D 1S5	31.750	9.00	25.70	49.90	5.08	5.55	-
C 2060H-D 1F57	38.100	12.57	35.00	52.80	5.94	10.00	-
C 2060H-D 3F44	38.100	12.57	25.00	55.50	5.94	M 8	-
C 2060S LR-D 3F55	38.100	12.57	14.30	40.50	5.94	5.94	2.00
C 2062-D 1F32	38.100	12.57	18.50	43.00	5.94	9.00	-
C 2062-D 1F40	38.100	12.57	30.00	54.60	5.94	8.00	-
C 2062-D 1F54	38.100	12.57	25.00	49.40	5.94	7.95	2.50
C 2062-D 3F31	38.100	12.57	35.00	59.50	5.94	10.00	-
C 2062H-D 1F47	38.100	12.57	30.00	57.80	5.94	7.95	2.50
C 2062H-D 1F58	38.100	12.57	29.20	57.00	5.94	9.80	-
C 2062H-D 1F68	38.100	12.57	26.00	53.80	5.94	5.94	2.00
C 2062HF99	38.100	12.57	50.00	80.80	5.94	10.00	-
C 2062HNP-D 1F59	38.100	12.57	22.20	50.20	5.94	12.70	-
216B-D 1F4	50.800	17.02	20.00	54.10	8.28	12.00	-
C 2082-D 1F21	50.800	15.75	24.50	55.60	7.92	12.00	-
C 2082-D 1F8	50.800	15.75	30.00	61.20	7.92	8.50	-
C 2082H-D 1F10	50.800	15.75	30.00	64.40	7.92	8.50	-
C 2082H-D 1F12	50.800	15.75	20.00	54.20	7.92	9.00	3.20
C 2082H-D 1F22	50.800	15.75	25.40	60.00	7.92	15.88	-
C 2102H-D 3F5	63.500	18.90	37.00	78.50	9.53	9.53	2.50

双节距加长销输送链

Double pitch conveyor chains with extended pins

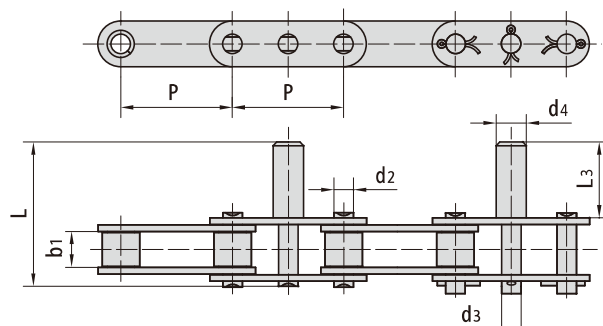


东华链号 Donghua Chain No.	P	b1	d2	d3	d4	L3	L
	mm	mm	mm	mm	mm	mm	mm
C 2052F2	31.75	9.40	5.08	6.00	7.00	20.00	39.80
C 2052F14	31.75	9.40	5.08	6.00	7.00	21.00	40.40
C 2050G KF12	31.75	9.40	5.08	5.08	5.08	11.90	34.00
C 2050G KF13	31.75	9.40	5.08	5.20	10.00	35.00	54.60
C 2052-D 5F26	31.75	9.40	5.08	6.35	8.76	19.90	39.50
C 2052-D 5F27	31.75	9.40	5.08	6.35	7.11	19.70	39.00
C 2060H-D 23	38.10	12.57	5.94	8.80	12.70	41.30	69.30
C 2060H-D 24	38.10	12.57	5.94	7.95	12.70	44.80	65.60
C 2060H-D 31	38.10	12.57	5.94	7.95	16.00	45.00	73.00
C 2060H-D 5F4	38.10	12.57	5.94	7.95	12.70	50.00	77.80
C 2060HF9	38.10	12.57	5.94	7.95	12.70	41.30	69.30
C 2060HF10	38.10	12.57	5.94	7.70	14.30	41.30	69.30
C 2060HF75	38.10	12.57	5.94	6.00	8.00	27.50	55.50
C 2062-D 38	38.10	12.57	5.94	5.94	11.10	24.20	48.60
C 2062-D 39	38.10	12.57	5.94	5.94	13.30	32.20	56.60
C 2062H-D 41	38.10	12.57	5.94	9.53	9.50	22.20	50.00
C 2062HG KF17-D 5F1	38.10	12.57	5.94	7.95	13.30	32.20	60.20
C 212AHF3	38.10	12.57	5.94	8.08	10.00	35.00	63.00
C 212AHF7	38.10	12.57	5.94	5.94	12.70	41.20	69.20
C 212AHF8	38.10	12.57	5.94	8.00	10.00	35.00	63.00
C 212AHL-D 4	38.10	12.57	5.94	5.94	8.00	25.00	53.00

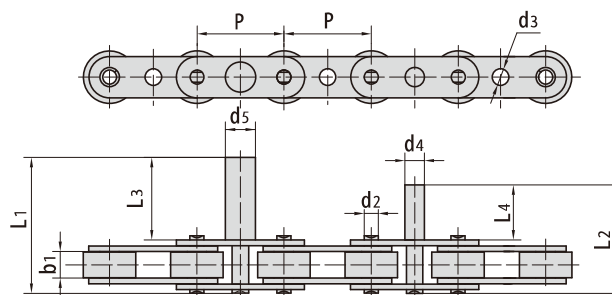


东华链号 Donghua Chain No.	P	b1	d2	d4	d5	L3	L1	L4	L2
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2052F1	31.75	9.4	5.08	7.0	11.0	30.0	49.8	20.0	39.8

双节距加长销输送链

Double pitch conveyor chains with extended pins

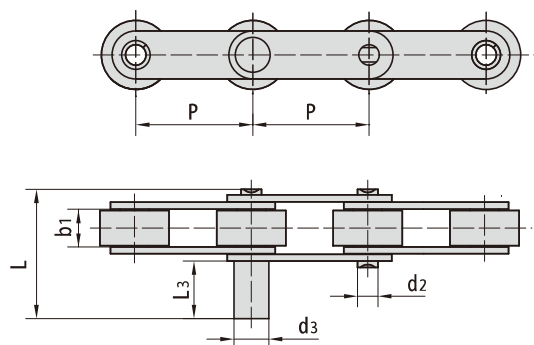


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	L ₃	L
	mm	mm	mm	mm	mm	mm
C 2052D F1	31.75	9.40	5.08	7.50	14.15	33.6
C 210AF4	31.75	9.40	5.08	11.00	34.00	53.7
C 2052-D 4	31.75	9.40	5.08	6.00	32.40	52.0
C 2050-D 5	31.75	9.40	5.08	8.00	40.00	59.7
C 212AHL-D 4	38.10	12.57	5.94	8.00	25.00	53.0
C 2062-D 6	38.10	12.57	5.94	12.00	25.00	49.7

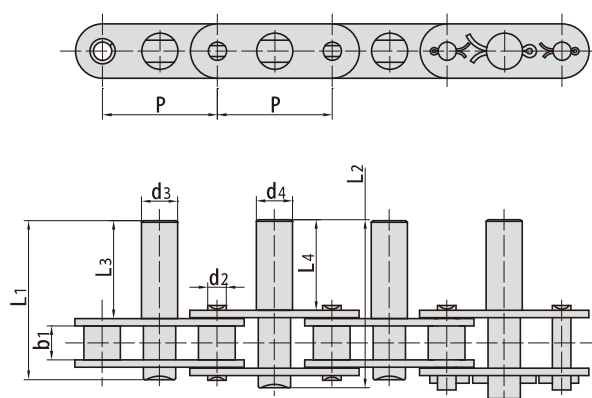


东华链号 Donghua Chain No.	P	b ₁	d ₂	d ₃	d ₄	L ₃	L ₁	L ₄	L ₂
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2050-D 5F1	31.75	9.40	5.08	10.00	10.00	43.20	60.30	41.00	62.40

双节距加长销输送链

Double pitch conveyor chains with extended pins

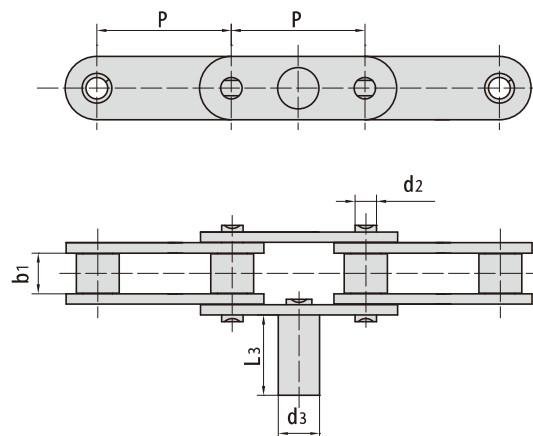


东华链号 Donghua Chain No.	P	b1	L3	d2	d3
	mm	mm	mm	mm	mm
C 2050-D 5F25	31.75	9.40	19.00	5.08	10.00
C 2050F44	31.75	9.40	19.00	5.08	9.75

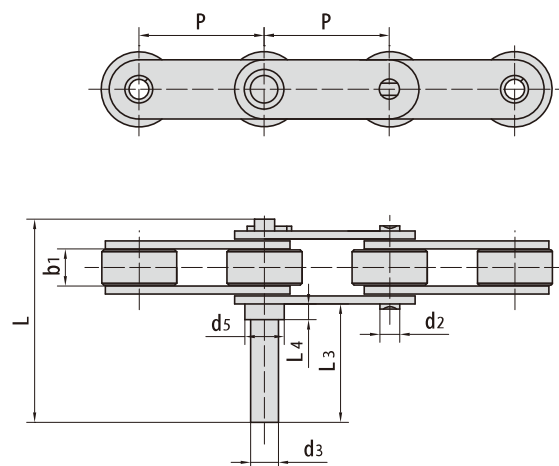


东华链号 Donghua Chain No.	P	b1	L3	L4	L	d2	d3	d5
	mm	mm	mm	mm	mm	mm	mm	mm
C 2052-D 1F29	31.75	9.40	33.00	3.00	55.00	5.08	9.00	13.00
C 2052-D 3F24	31.75	9.40	33.00	3.00	55.00	5.08	9.00	13.00
C 2052-D 3F55	31.75	9.40	34.00	4.00	56.00	5.08	7.00	10.00

双节距加长销输送链

Double pitch conveyor chains with extended pins

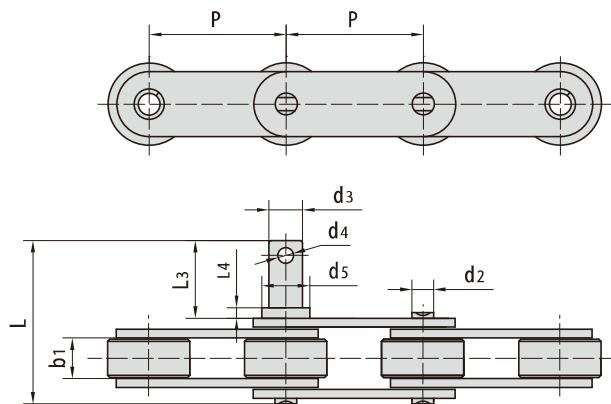


东华链号 Donghua Chain No.	P	b1	L3	L4	L	d2	d3	d4	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C 2052-D 1F15	31.75	9.40	16.20	2.20	35.90	5.08	7.00	-	10.00
C 2052-PF1-D 3F30	31.75	9.40	14.20	2.00	33.90	5.08	5.08	-	8.00
C 2062-D 1F43	38.10	12.57	40.60	29.10	65.00	5.94	M 5	-	5.94
C 2062-D 8	38.10	12.57	29.00	7.00	53.40	5.94	7.00	-	14.00
C 2062H-D 1F45	38.10	12.57	27.70	6.00	55.60	5.94	7.90	2.00	12.00
C 2062H-D 1F50	38.10	12.57	29.00	7.00	56.80	5.94	7.00	-	14.00
C 2062H-D 1F58	38.10	12.57	29.20	12.20	57.00	5.94	9.00	-	12.00
C 2082HAA 1F2-D 3F2	50.80	15.75	61.50	6.00	96.50	7.92	12.00	-	15.00
C 2082H-D 3F19	50.80	15.75	31.00	11.00	65.50	7.92	11.90	-	15.88
C 220AHS LR-D 1F3	63.50	18.90	28.00	3.50	69.50	9.53	11.00	-	15.00

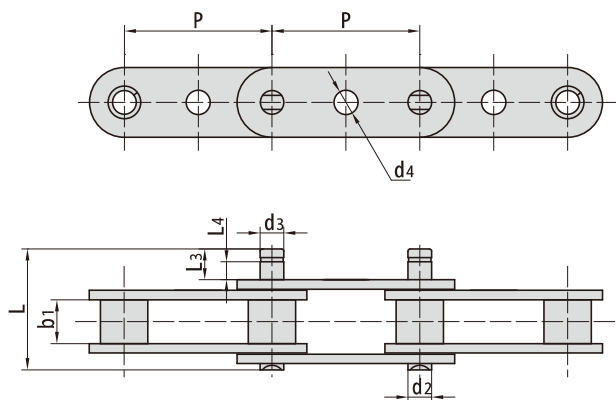

东华链号 Donghua Chain No.	P	b1	L3	L4	L	d2	d3	d4
	mm	mm	mm	mm	mm	mm	mm	mm
C 2050-D 1F62	31.75	9.40	8.00	5.00	27.40	5.08	5.08	5.20
C 2050-D 1F63	31.75	9.40	5.00	2.00	24.40	5.08	5.08	5.20
C 2050-D 1F64	31.75	9.40	7.00	7.00	24.40	5.08	8.00	-
C 2060SLR-D 3F56	38.10	12.57	18.20	15.00	44.50	5.94	5.94	-

倍速链


Double plus chains

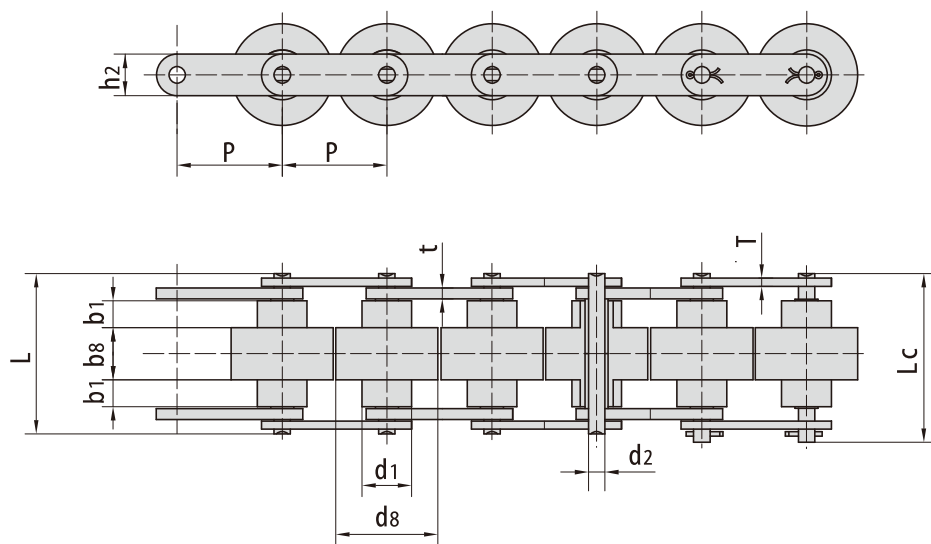

JB 链号 JB Chain No.	东华链号 Donghua Chain No.	节距 Pitch	滚子尺寸 Roller dimension				销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			每米长重 Weight per meter
		p	d1 max	d8 max	b1 min	b8 max	d2 max	L max	Lc max	h2 max	T max	t max	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206B	C2030W	19.05	11.91	18.3	4.00	8.0	3.28	24.0	25.6	8.20	1.30	1.50	0.52
BS25-C208A	C2040W	25.40	15.88	24.6	5.70	10.3	3.96	31.0	32.8	11.70	1.50	1.50	0.79
BS25-C210A	C2050W	31.75	19.05	30.6	7.10	13.0	5.08	39.5	41.2	15.00	2.00	2.03	1.36
BS25-C212A	C2060HW	38.10	22.23	36.6	8.50	15.5	5.94	50.3	52.8	18.00	3.00	4.00	2.24
BS25-C216A	C2080W	50.80	28.58	49.0	11.00	21.5	7.92	66.2	70.0	24.00	4.00	4.80	4.06
BS30-C206B		19.05	9.00	18.3	4.50	9.1	3.28	26.3	29.6	7.28	1.30	1.50	0.50
BS30-C208A		25.40	11.91	24.6	6.10	12.5	3.96	35.6	39.5	9.60	1.50	2.00	0.83
BS30-C210A		31.75	14.80	30.6	7.50	15.0	5.08	43.0	47.1	12.20	2.00	2.40	1.27
BS30-C212A		38.10	18.00	37.0	9.75	20.0	5.94	58.1	62.7	15.00	3.00	4.00	2.14
BS30-C216A		50.80	22.23	49.0	12.00	25.2	7.92	71.9	77.3	18.60	4.00	5.00	3.55

带大滚轮输送链

Conveyor chains with large rollers

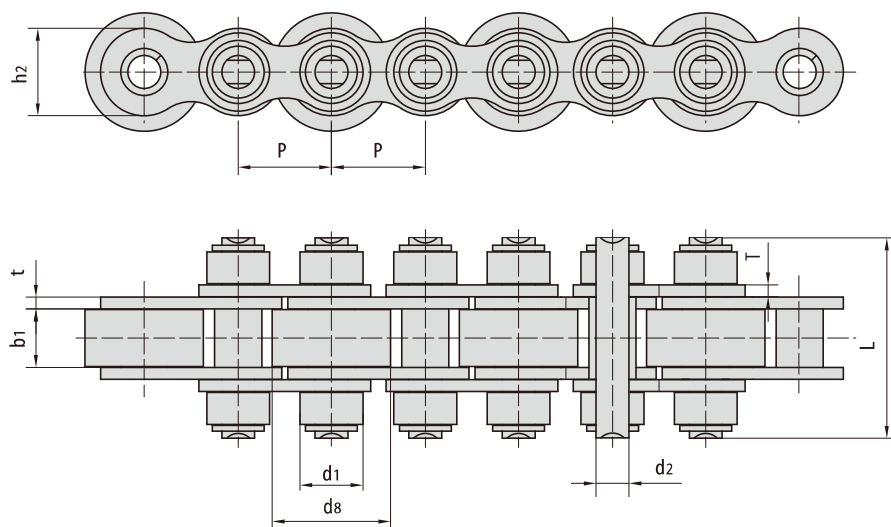


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN
08BS-27-P16/C16	12.70	8.51	16.0	7.75	4.45	27.0	11.8	1.60/1.50	18.0/4091	19.8
08BS-33-C16	12.70	8.51	16.0	7.75	4.45	33.0	11.8	1.60/1.50	18.0/4046	19.8
08BSF8-27-C16	12.70	8.51	16.0	7.75	4.45	27.0	11.8	1.60/1.50	18.0/4046	19.8
12BS	19.05	12.07	28.0	11.68	5.72	45.0	16.0	1.85	28.9/6568	31.7
12BS-40-P28/C28	19.05	12.07	28.0	11.68	5.72	40.0	16.0	1.85	29.0/6591	31.7
12BS-43-P26/C26	19.05	12.07	26.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-43-P28/C28	19.05	12.07	28.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-48-P24/C24	19.05	12.07	24.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P26/C26	19.05	12.07	26.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P28/C28	19.05	12.07	28.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-58-P28/C28	19.05	12.70	28.0	11.68	5.72	58.0	16.0	1.85	29.0/6591	31.7
16BS-65-P38/C38	25.40	15.88	38.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
100SF1-85-C45	31.75	19.05	45.0	25.50	9.53	85.0	30.0	4.00	86.7/19490	104.0
212BS-43-P48	38.10	12.07	48.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7

注：P 表示滚子材料为塑料，C 表示滚子材料为钢。

Note: P means roller made in plastic, C means roller made in steel.


带大滚轮输送链 Conveyor chains with large rollers

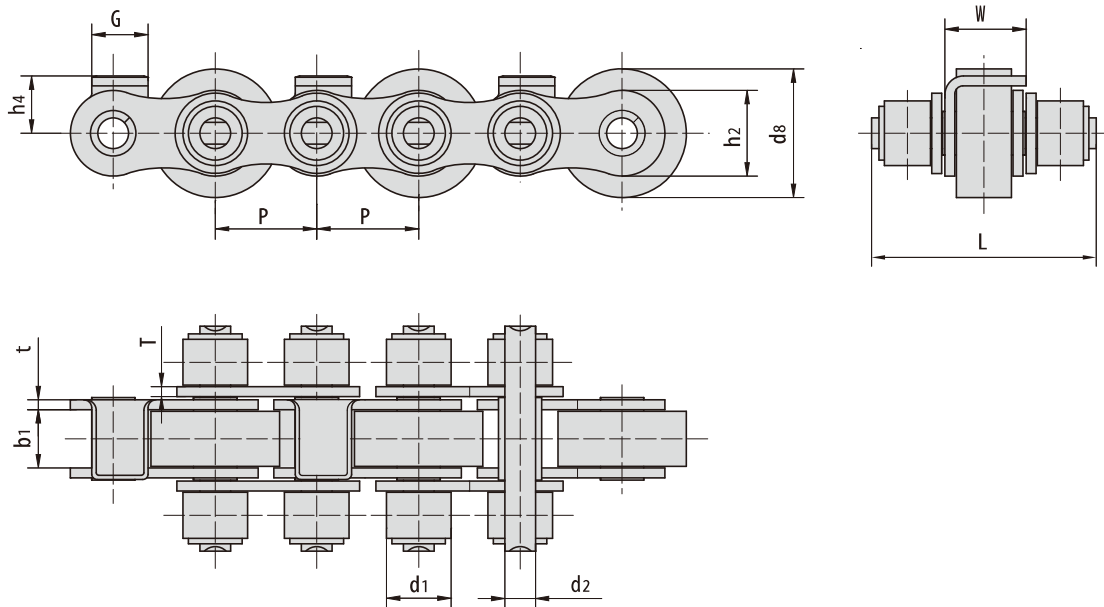

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		附板尺寸 Attachment dimension			抗拉强度 Tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	h4	G	W	Q _{min} kN/bf
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
12BSF5-40-C 28	19.05	12.07	28.0	11.40	5.72	40.0	16.0	1.85	10.0	8.4	15.0	29.0/6519
12BSF5-43-C 26	19.05	12.07	26.0	11.40	5.72	43.0	16.0	1.85	10.0	8.4	15.0	29.0/6519
12BSF5-43-P 28/C 28	19.05	12.07	28.0	11.40	5.72	43.0	16.0	1.85	10.0	10.5	15.0	29.0/6519
12BSF5-48-C 24	19.05	12.07	24.0	11.40	5.72	48.0	16.0	1.85	10.0	8.4	13.5	29.0/6519
12BSF8-40-C 28	19.05	12.07	28.0	11.40	5.72	40.0	16.0	1.85	10.0	8.0	15.0	29.0/6519
16BSF2-65-C 38	25.40	15.88	38.5	17.02	8.28	65.0	21.0	4.15/3.10	16.5	12.0	24.0	60.0/13636

注:P表示滚子材料塑料, C表示滚子材料为钢。
Note P means roller made in plastic, C means roller made in steel

带大滚轮输送链 Conveyor chains with large rollers

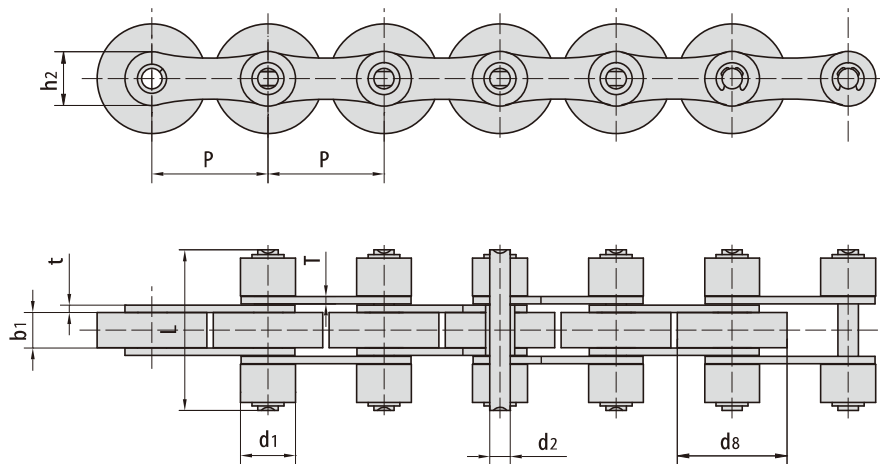


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN
16BS-65-C24	25.4	15.88	24.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
208BS-35-C24	25.4	12.00	24.0	7.75	4.45	35.0	11.8	1.60	18.0/4091	19.8
*208BSF1-35-P24	25.4	12.00	24.0	7.75	4.45	35.0	11.8	1.60	18.0/4091	19.8
212BS-48-C28	38.1	12.07	28.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
212BSF2	38.1	12.07	28.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7
212BSF3	38.1	12.07	28.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
*212BSF4	38.1	12.07	24.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
212BSF4-48-C24	38.1	12.07	24.0	11.68	5.72	48.0	16.0	2.03	32.0/7194	35.2
212BSF5-43-C28	38.1	12.07	28.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7
*216BS-65-P50	50.8	15.88	50.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
216BS-65-C38.5	50.8	15.88	38.5	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
216BS-65-C40	50.8	15.88	40.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
63PS	63.0	40.00	50.0	24.50	14.00	91.5	35.0	5.10	90.0/20232	135.0
63PSF1	63.0	38.00	46.0	21.60	12.00	84.0	30.0	4.00	66.6/15000	85.0

注：*表示滚子材料为塑料。
Note: * means roller made in plastic.


带侧滚轮输送链

Conveyor chains with outboard rollers

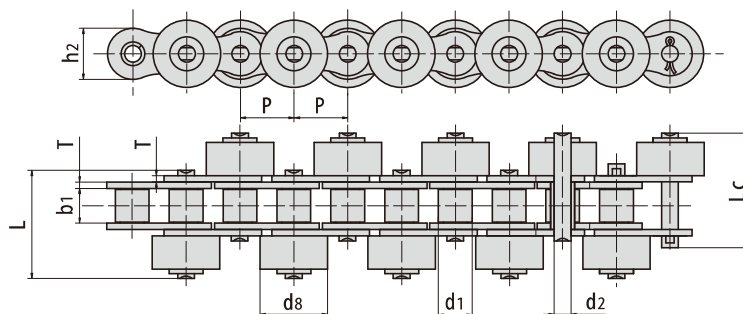

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q _m min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
40-PSR	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3102	17.50	1.60
*40S	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3102	17.50	0.90
40S-C	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	15.2/3417	18.20	1.65
50-SR-C	15.875	10.16	19.05	9.40	5.08	31.8	34.0	15.1	2.03	21.8/4900	29.40	2.40
*60S	19.050	11.91	22.23	12.57	5.94	40.0	42.5	18.0	2.42	31.8/7227	38.10	1.90
60S-C	19.050	11.91	22.23	12.57	5.94	40.0	42.5	18.0	2.42	31.8/7149	38.10	3.63
*80S	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	56.7/12886	69.40	3.60
80S-C	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	56.7/12886	69.40	5.80

注：*表示滚子材料为塑料。
Note: * means roller made in plastic.

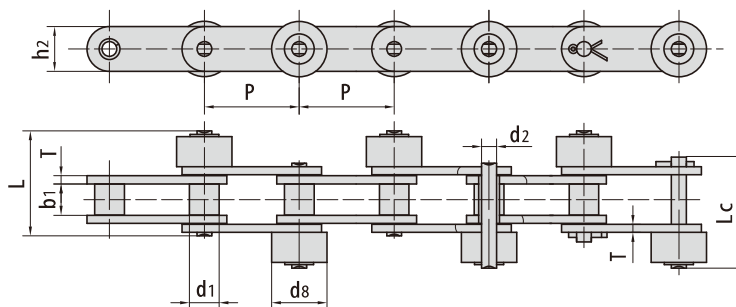


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q _m min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
C 2040S2-PSR	25.40	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3137	15.2	0.99
C 2050S	31.75	10.16	19.05	9.40	5.08	31.8	34.0	15.0	2.03	21.8/4955	23.9	1.52
C 2052SF1	31.75	19.05	27.00	9.40	5.08	35.0	37.3	15.0	2.03	21.8/4955	23.9	3.06
24BSF1	38.10	25.40	44.15	25.40	14.63	82.0	86.5	33.2	6.0/4.8	160.0/35968	176.0	15.33
*C 2060HS	38.10	11.91	22.23	12.57	5.94	44.0	46.6	18.0	3.25	31.1/7069	34.3	1.78
C 2060SF7	38.10	11.91	22.23	12.57	5.94	45.5	48.0	18.0	2.42	31.1/6991	34.3	2.92
*C 2062HSF6	38.10	22.23	30.00	12.57	5.94	45.0	47.8	18.0	3.25	31.1/6991	34.3	2.68
C 2082HSF2	50.80	28.58	40.00	15.75	7.92	54.6	57.8	24.0	4.00	55.6/12500	69.4	6.64
*C 2100HS-P	63.50	19.05	39.69	18.90	9.53	65.3	68.6	30.0	4.80	86.7/19490	109.2	4.44

注：*表示滚子材料为塑料
Note: * means roller made in plastic


带侧滚轮输送链

Conveyor chains with outboard rollers

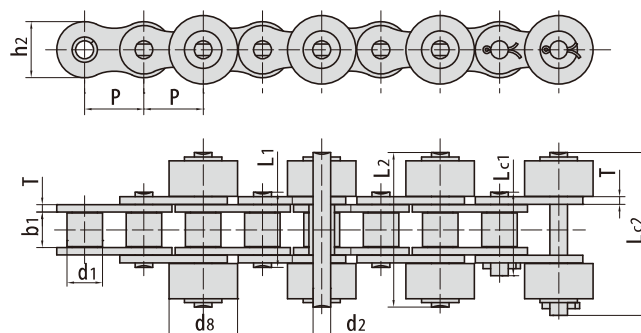

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length				链板尺寸 Plate dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	Lc1 max	Lc2 max	h2 max	T max	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
*08BSR2F1-P	12.700	8.51	15.88	7.75	4.45	16.7	34.7	19.3	36.5	11.80	1.60	18.0/4046	0.96
40S2-SR	12.700	7.95	15.88	7.85	3.96	16.6	35.3	18.8	37.2	12.00	1.50	14.1/3169	1.64
50SF1-C	15.875	10.16	19.05	9.40	5.08	20.7	42.8	23.3	45.0	15.09	2.03	21.8/4900	2.41
*50SF1-P	15.875	10.16	19.05	9.40	5.08	20.7	42.8	23.3	45.0	15.09	2.03	21.8/4901	1.17
60S2-C	19.050	11.91	22.23	12.57	5.94	25.9	54.0	28.3	56.6	18.00	2.42	31.8/7149	3.62
100S2	31.750	9.53	36.70	18.90	9.53	40.4	83.0	44.7	87.0	30.00	4.00	86.7/49490	9.09
100S2F1	31.750	19.05	39.40	18.90	9.53	40.4	83.0	44.7	86.9	30.00	4.00	86.7/21224	8.55


注：*表示滚子材料为塑料
Note * means roller made in plastic

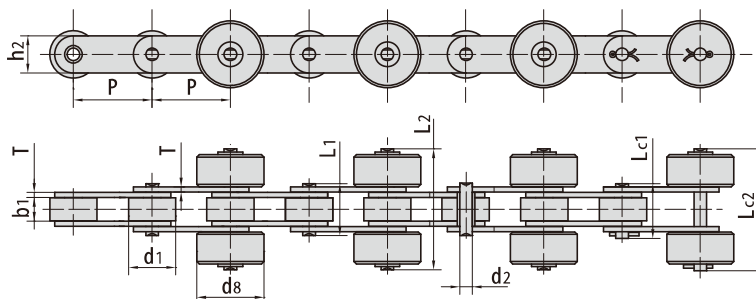

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length				链板尺寸 Plate dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	Lc1 max	Lc2 max	h2 max	T max	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
C 2050S2	31.75	10.16	19.05	9.40	5.08	/	42.8	/	45.0	15.0	2.03	21.8/4899	2.20
*C 2052SF2-P25.4	31.75	19.05	25.40	9.40	5.08	20.7	49.2	23.3	51.1	15.0	2.03	21.8/4900	1.23
C 2060HS-C	38.10	11.91	30.00	12.57	5.94	29.2	57.6	31.6	59.2	18.0	3.25	31.8/7149	3.42
C 2062HS-C	38.10	22.23	30.00	12.57	5.94	/	57.6	/	59.2	18.0	3.25	31.8/7149	5.97
C 2062-SR2F1	38.10	22.23	30.00	12.57	5.94	25.9	53.7	28.3	55.6	18.0	2.42	31.1/6991	2.95
*C 2062SR2F1-PA6	38.10	22.23	30.50	12.57	5.94	25.9	56.0	28.3	58.5	18.0	2.42	31.1/6991	2.35


注：*表示滚子材料为塑料
Note * means roller made in plastic

带特殊滚轮输送链 Conveyor chains with special rollers

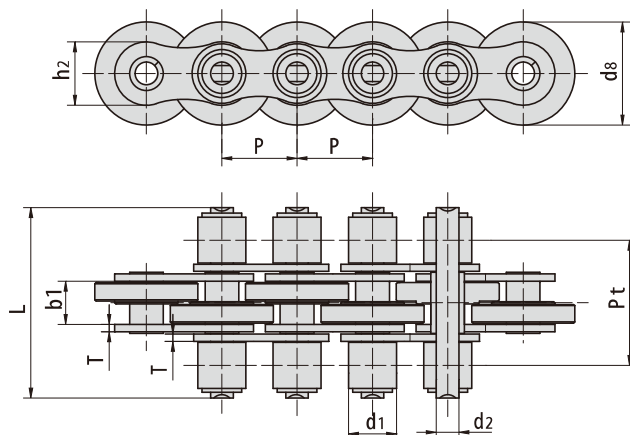

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		排距 Transverse pitch	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	T max	Pt	Q _m in	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN
12BS3-40-C 27/P 27	19.05	12.07	27.0	11.68	5.72	40.0	16.0	1.85	27.0	29.0/6519	34.8
12BS3F1-48-C 26	19.05	12.07	26.0	11.40	5.72	48.0	16.0	1.85	31.7	29.0/6519	34.8


注: P 表示滚子材料塑料, C 表示滚子材料为钢。
Note: P means roller made in plastic, C means roller made in steel

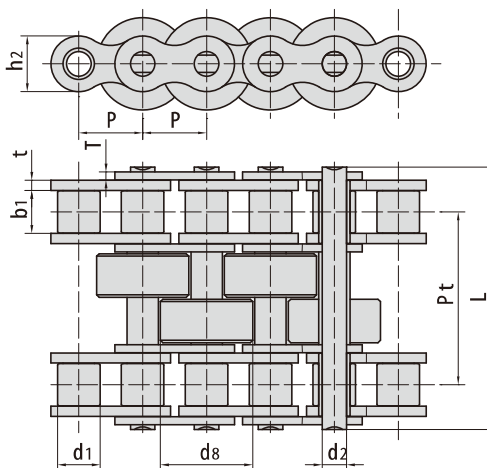

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		排距 Transverse pitch	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Pt	Q _m in	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN
24BF28-PA 6	38.100	25.40	55.00	25.40	14.63	156.80	33.20	6/4.8	103.0	280.0/62944	308.0
24BSF2-2	38.100	25.40	55.00	25.40	14.63	156.80	33.20	6/4.8	102.8	280.0/62944	308.0

注: P 表示滚子材料为塑料, C 表示滚子材料为钢。
Note: P means roller made in plastic, C means roller made in steel

带特殊滚轮输送链 Conveyor chains with special rollers

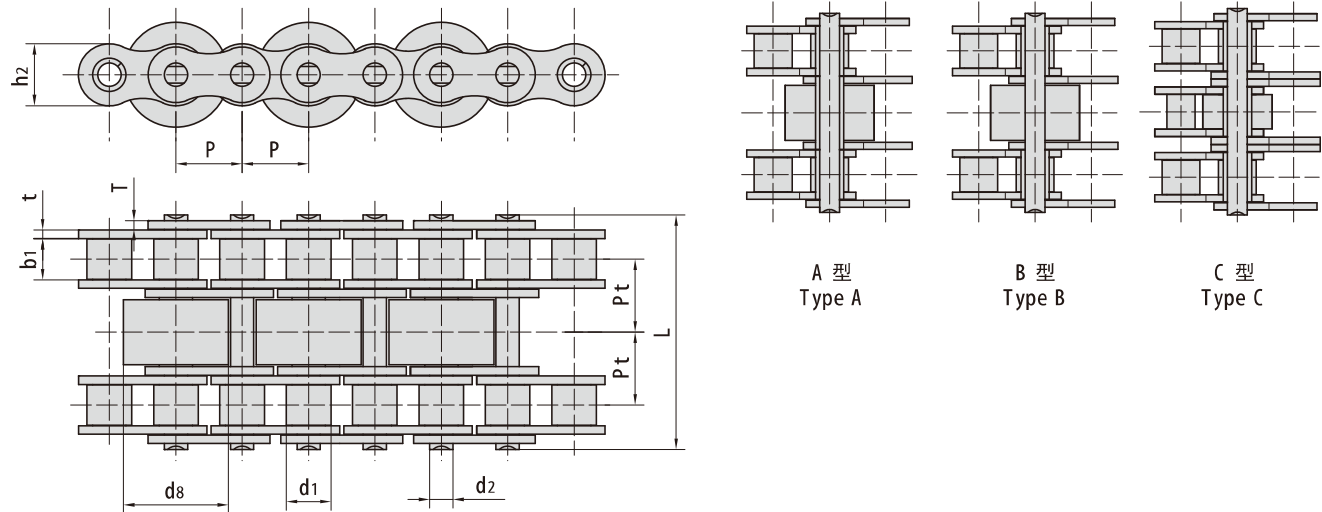


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		排距 Transverse pitch	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	型号 Type
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Pt	Q min	Q0	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	
06BF52-C 14.5/P 14.5	9.525	6.35	14.50	5.72	3.28	33.5	8.2	1.30	10.24	14.0/3147	16.1	B
06BS-3-C 15/P 15	9.525	6.35	15.00	5.72	3.28	33.5	8.2	1.30	10.24	16.9/3841	18.7	B
A06BF3S-3-C 15/P 15	9.525	6.35	15.00	5.72	3.28	33.5	8.4	1.30	10.24	16.9/3841	18.7	B
08BS-3-45-C 16	12.700	8.51	16.00	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BS-3-45-C 17	12.700	8.51	17.00	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BS-3-45-C 20	12.700	8.51	20.00	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BSF1-3-45-C 17	12.700	8.51	17.00	7.75	4.45	45.5	11.8	1.60	14.23	32.0/7273	38.7	A
08BSF6-3-45-C 20	12.700	8.51	20.00	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	B
12AF107-3-71-C 28	19.050	11.91	28.58	12.57	5.94	71.5	18.0	2.42	22.78	62.6/14072	72.0	C
12AF122-2	19.050	11.91	28.00	12.57	5.94	65.3	18.0	2.42	19.60	62.3/14005	71.6	B
12AF127-3-P 29	19.050	11.91	29.00	12.70	5.94	71.5	18.0	2.42	22.80	62.6/14072	72.0	B
12AF90-3-71-C 28	19.050	11.91	28.58	12.57	5.94	71.5	18.0	2.42	22.78	62.6/14072	72.0	B
12ASF1-3-62-C 26	19.050	11.91	25.90	12.57	5.94	62.0	18.0	2.42	17.87	62.6/14072	72.0	A
12ASF2-3-81-P 28.4	19.050	11.91	28.40	12.57	5.94	81.0	18.0	2.42	27.42	62.6/14072	72.0	B
12BF45-3-C 28/P 28	19.050	12.07	28.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	B
12BS-3-62-C 24	19.050	12.07	24.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	A
12BS-3-62-C 26	19.050	12.07	26.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	A
12BS-3-62-C 28/P 28	19.050	12.07	28.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	A
12BS-3-62-C 31	19.050	12.07	31.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	B
12BSF10-3-62-C 26	19.050	12.07	26.00	11.68	5.72	61.5	16.0	1.85	19.46	86.7/19705	101.8	C
12BSF10-3-62-C 28	19.050	12.07	28.00	11.68	5.72	61.5	16.0	1.85	19.46	86.7/19705	101.8	C
16SB-3-100-C 38	25.400	15.88	38.50	17.02	8.28	99.8	21.0	4.15/3.1	31.88	160.0/35968	184.0	C
C 212BSF1-3-62-C 32	38.100	12.07	32.00	11.68	5.72	61.5	16.0	1.85	19.46	57.8/12993	66.5	B
C 2082HF80-2-PA 6	50.800	28.58	45.00	15.75	7.92	108.0	24.0	4.00	35.65	94.0/21131	108.1	C

注:P 表示滚子材料为塑料, C 表示滚子材料为钢。

Note:P means roller made in plastic, C means roller made in steel

带顶滚轮短节距输送链


Short pitch conveyor chains with top rollers

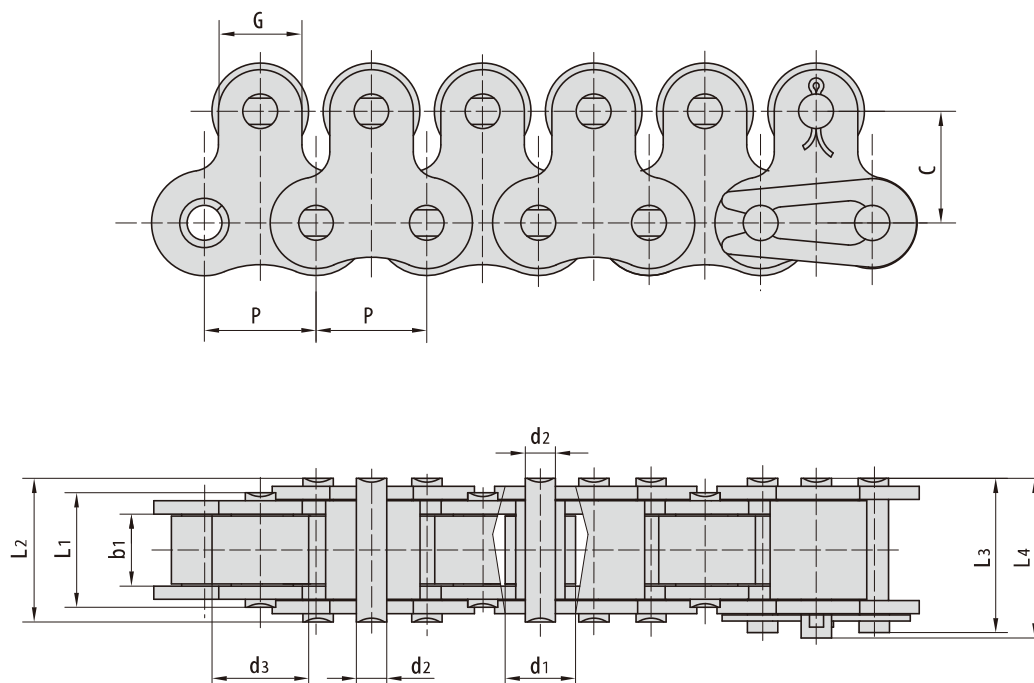

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length				附板尺寸 Attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	d3 max	b1 min	d2 max	L1 max	L2 max	L3 max	L4 max	G	C	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
40-1-1LTR	12.700	7.95	11.00	7.85	3.96	13.50	16.60	17.80	18.80	9.5	12.7	14.1/3250	1.44
50-1-1LTR	15.875	10.16	15.00	9.40	5.08	16.50	20.70	22.20	23.30	12.7	15.9	22.2/4991	2.30
50-1LTRF1	15.875	19.05	19.05	9.40	5.08	16.50	20.70	22.20	-	12.7	15.9	22.2/4991	1.96
50-1LTRF2	15.875	10.16	18.00	9.40	5.08	16.50	20.70	22.20	-	12.7	15.9	22.2/4991	1.90
50-1LTRF4	15.875	10.16	19.00	9.40	5.08	-	20.70	22.20	23.30	12.7	15.9	22.2/4991	2.28
60-1-1LTR	19.050	11.91	18.00	12.57	5.94	21.00	25.90	27.70	28.30	15.9	18.3	31.8/7227	3.40
80-1-1LTR	25.400	15.88	24.00	15.75	7.92	26.20	32.70	35.00	36.50	19.1	24.6	56.7/12746	5.90
80-1LTRF1	25.400	15.88	25.58	15.75	7.92	26.20	32.70	-	36.50	19.1	24.6	56.7/12746	4.42
100-1-1LTR	31.750	19.05	30.00	18.90	9.53	32.30	40.40	44.70	44.70	25.4	31.8	88.5/20114	8.90

带顶滚轮双节距输送链


Double pitch conveyor chains with top rollers

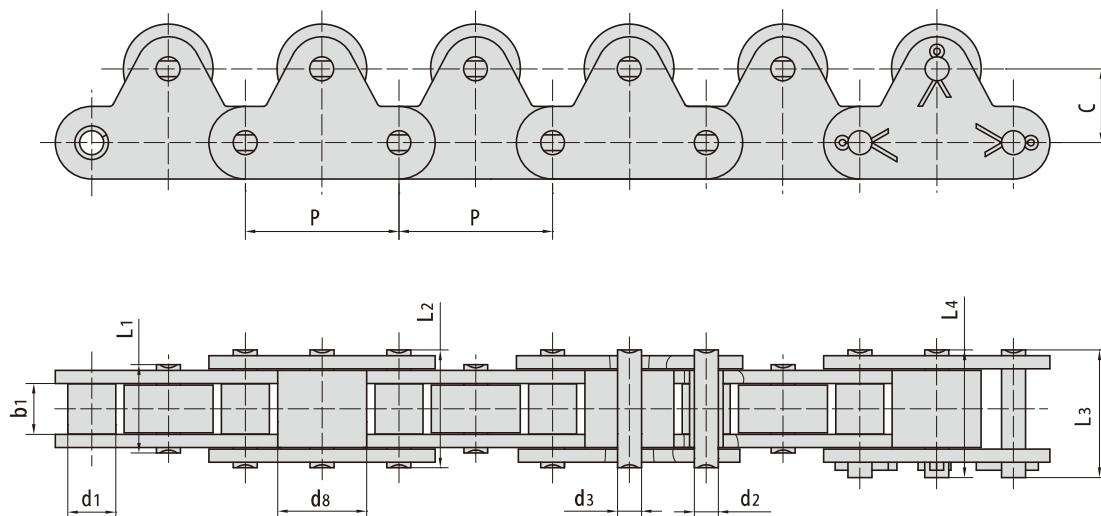


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length				附件尺寸 Attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	L3 max	L4 max	C	d3	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
C 2040-1LTR	25.40	7.95	15.88	7.85	3.96	13.50	16.6	17.8	18.8	12.7	3.96	14.1/3205	1.31
C 2040-1LTR F2	25.40	7.95	15.88	7.85	3.96	13.50	16.6	17.8	18.8	15.0	3.96	14.1/3205	1.24
C 2040-1LTR F3	25.40	7.95	15.88	7.85	3.96	13.50	16.6	17.8	18.8	15.0	3.96	10.0/2248	1.12
C 2050-1LTR	31.75	10.16	19.05	9.40	5.08	16.50	20.7	22.2	23.3	15.9	5.08	22.2/5045	2.03
C 2050-1LTR F3	31.75	10.16	19.05	9.40	5.08	16.50	20.7	22.2	23.3	19.0	5.08	22.2/5045	1.91
C 2060-1LTR	38.10	11.91	22.23	12.57	5.94	20.70	25.9	27.5	27.5	23.0	5.94	31.8/7227	2.89
C 2060-1LTR F6	38.10	11.91	22.23	15.57	5.94	21.00	25.9	27.7	28.3	23.0	5.94	31.8/7227	2.80
C 2060H-1LTR F7	38.10	5.94	28.00	12.57	5.94	22.40	29.2	31.6	-	18.3	5.94	31.1/6991	1.61
C 2080-1LTR	50.80	15.88	28.58	15.75	7.92	26.20	32.7	35.0	36.5	29.0	11.50	56.7/12886	4.54
C 2080H-1LTR	50.80	15.88	28.55	15.75	7.92	29.28	36.2	38.9	41.6	29.0	11.10	55.6/12499	5.50
C 2100-1LTR	63.50	19.05	39.67	18.90	9.53	32.30	40.4	44.7	44.7	35.4	14.50	88.5/20114	7.72
C 2100-1LTR F2	63.50	19.05	39.67	18.90	9.53	32.30	40.4	44.7	44.7	31.8	9.53	88.5/20114	7.42

木材输送链及附件

Lumber conveyor chains & attachments

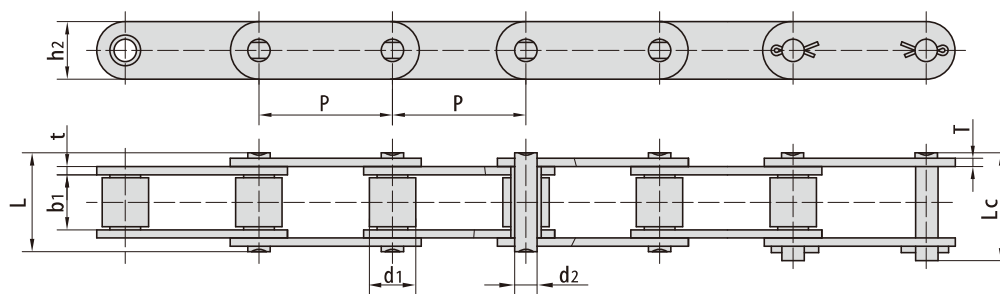


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q _m in	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 42.47F1	42.47	22.20	27.00	11.10	49.0	53.5	28.60	4.00	97.0/21806	106.7	4.74
500R	50.00	25.40	25.40	14.63	52.0	56.4	40.00	5.00	100.0/22727	114.5	7.13
500RF1	50.00	25.40	25.40	14.63	53.4	60.1	40.00	5.00	120.0/29376	132.0	7.23
81X	66.27	23.00	27.00	11.10	49.0	53.5	28.50	4.00	106.7/24250	128.9	3.78
81XF14	66.27	23.00	27.00	11.10	50.8	53.8	28.70	4.00	85.5/19426	91.4	3.78
81XH	66.27	23.00	27.78	11.10	60.7	65.1	31.35	7.94/5.55	151.9/34523	175.7	5.88
81XHE	66.27	22.20	27.00	11.10	59.5	63.0	28.50	6.30	83.3/18927	89.1	5.09
81XHH	66.27	23.00	27.78	11.10	65.6	70.0	31.35	7.94	191.1/43432	212.6	6.70
81XHS	66.27	23.00	27.00	11.10	63.6	68.0	31.80	7.60	152.0/34545	177.2	6.55
441.100R	100.00	25.40	25.40	14.63	52.0	56.4	40.00	5.00	100.0/22727	114.5	5.15
P 100F271	100.00	25.40	25.40	14.63	54.0	58.0	40.00	5.00	100.0/22480	110.0	5.22

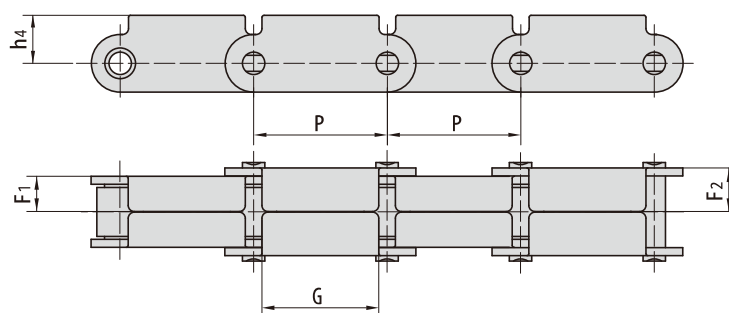


东华链号 Donghua Chain No.	P	F1	F2	G	h4
	mm	mm	mm	mm	mm
81XF1(RT)	66.27	17.50	21.80	58.00	23.85

木材输送链及附件

Lumber conveyor chains & attachments

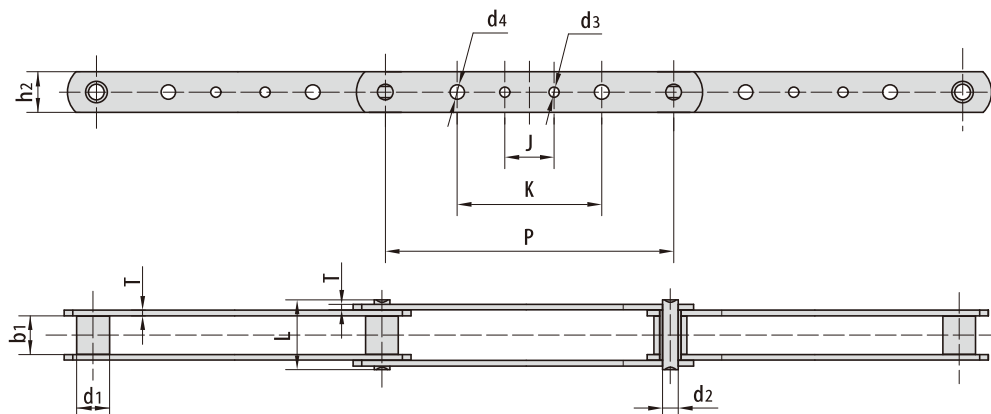


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴尺寸 Pin dimension		链板尺寸 Plate dimension					链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	d3 max	d4 max	J max	K max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
3939-B4	203.2	23.0	27.0	11.1	49.0	28.58	7.2	7.2	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939-B21	203.2	23.0	27.0	11.1	49.0	28.58	7.2	-	38.1	-	4.0	115.58/26268	136.5	2.45
3939-B23	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	92.1	4.0	115.58/26268	136.5	2.45
3939-B24	203.2	23.0	27.0	11.1	49.0	28.58	-	7.2	-	101.6	4.0	115.58/26268	136.5	2.48
3939-B40	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	101.6	4.0	115.58/26268	136.5	2.45
3939-B43	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	92.1	4.0	115.58/26268	136.5	2.42
3939-B44	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939H-B4	203.2	23.0	27.0	11.1	58.0	28.60	-	7.2	38.0	102.0	6.4	150.00/34082	172.5	3.51

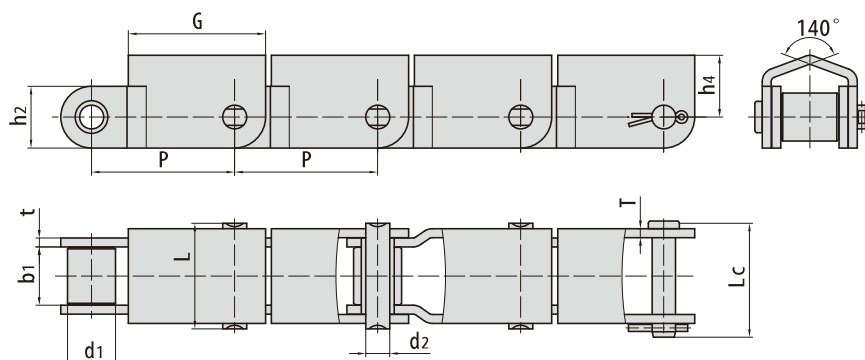


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	G	h4	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 66.27F6	66.27	22.23	27.00	11.10	49.00	53.80	28.60	4.15	63.50	28.60	97.8/21985	5.25

尖齿链 Sharp top chains


东华链号 Donghua Chain No.	P	h	H	B	L
	mm	mm	mm	mm	mm
08B-940	12.70	9.60	17.50	1.50	17.90

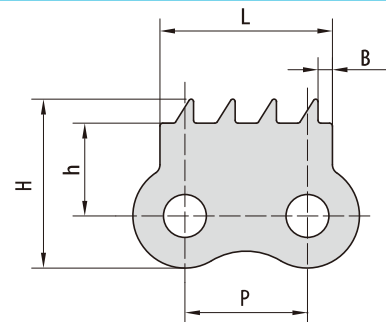


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
16AF1	25.40	17.5	29.50
C 16A-3PEP	25.40	17.4	29.00
C 16BF3	25.40	18.7	29.20

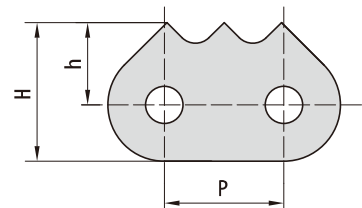


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
12BF3	19.05	13.5	21.5
C 16A-1170	25.40	16.5	28.0
16B-1170	25.40	16.0	26.5
16B-1172	25.40	15.0	25.5
C 24B-4STC	38.10	18.3	35.0

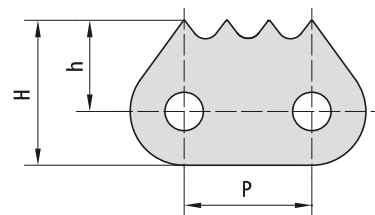

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
C 60F2	19.05	13.38	22.48

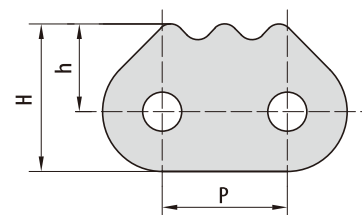

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
12B-910	19.05	13.70	21.70
60-910	19.05	12.70	21.70
C 16A-1-3PEPF1	25.40	17.50	29.50
C 100-1-3STC	31.75	19.15	34.15
C 24A-1-3STC	38.10	23.10	40.90

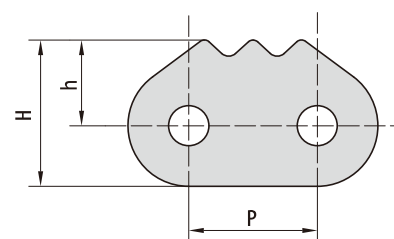






尖齿链 Sharp top chains

东华链号 Donghua Chain No.	P	h ₂	H	α
	mm	mm	mm	
08A-D2-F1	12.7	10.4	17.4	30°
08AF34	12.7	10.4	17.9	30°

东华链号 Donghua Chain No.	P	h ₁	h ₂	h	A	α
	mm	mm	mm	mm	mm	
08BF21	12.7	3.0	10.6	15.0	3.0	12°

东华链号 Donghua Chain No.	P	H	h	G
	mm	mm	mm	mm
08BF73	12.7	20.5	5.0	23.5


东华链号 Donghua Chain No.	P	A	B	C	h ₂	H
	mm	mm	mm	mm	mm	mm
10AF8	15.875	6.6	15.875	29.5	13.0	24.2

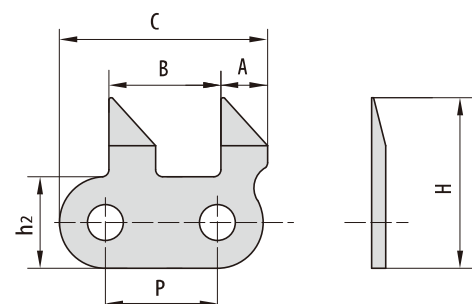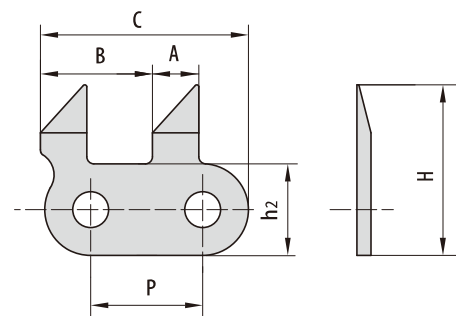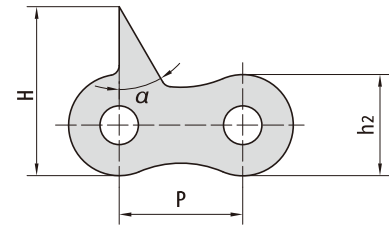


尖齿链

Sharp top chains


东华链号 Donghua Chain No.	P	H	h	h ₂	α
	mm	mm	mm	mm	
41F6	12.7	20.6	16.35	8.70	90°

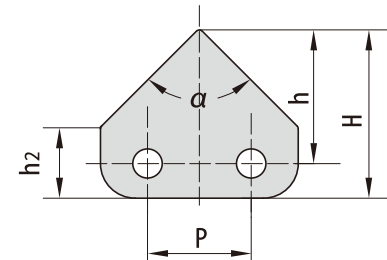


东华链号 Donghua Chain No.	P	h ₂	h	A
	mm	mm	mm	mm
06BF1	9.525	8.20	11.00	4.76
06BF37	9.525	8.20	10.00	4.76
08AF41	12.700	10.40	11.80	6.35
10AF78	15.875	15.09	16.88	9.72
16B-1STCF6	25.400	21.00	27.50	0.70
16BF97-STC	25.400	21.00	23.50	2.70
C210AH-1STCF1	31.750	15.00	13.50	20.00




东华链号 Donghua Chain No.	P	H	A
	mm	mm	mm
08BF44	12.7	16.30	23.30
08AF8	12.7	16.13	21.34



东华链号 Donghua Chain No.	P	C	H	α	β
	mm	mm	mm		
428H JF1	12.7	21.5	36.15	90°	18°
428H JF2	12.7	14.5	33.60	90°	34°



东华链号 Donghua Chain No.	P	h ₁	h ₂	h ₃	H	s
	mm	mm	mm	mm	mm	mm
08BF11	12.70	8.0	7.8	14.1	19.9	0.8

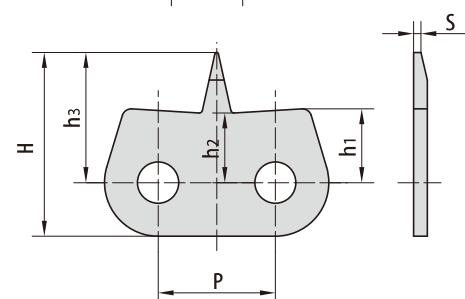

尖齿链 Sharp top chains






东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
08BF71	12.70	9.75	15.05

东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
C 10B-5STCF1	15.875	11.3	18.8	30.9
10AF41-2	15.875	11.5	19.0	30.9
12B-911	19.050	11.9	20.0	35.0

东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
C 12B-9010	19.05	13.00	21.00	19.05
C 12B-940	19.05	13.20	22.30	19.75
C 60-2STCF1	19.05	12.95	21.95	19.80
C 60-2STCF2	19.05	13.30	22.40	19.80
C 12B-1-9010	19.05	12.50	20.50	19.05
C 16B-1160	25.40	17.00	27.50	25.40
C 16B-1161	25.40	17.00	27.50	25.40
C 16A-1160	25.40	18.00	29.50	25.40
C 16A-1-1160F2	25.40	18.00	29.50	25.40
C 24B-2STCF1	38.10	19.50	35.50	25.00

东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
16B-1187	25.40	16.00	26.50	46.00

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
16BF45	25.40	12.00	29.00

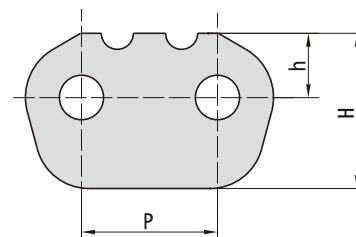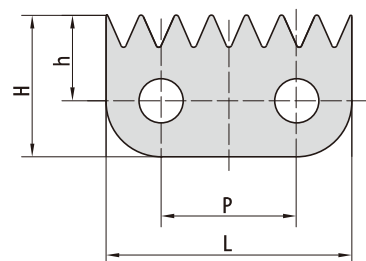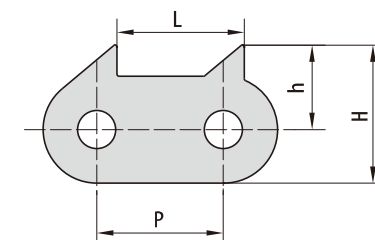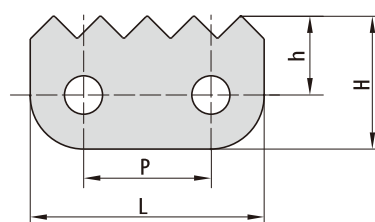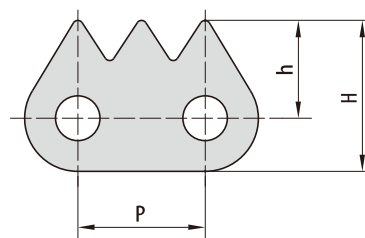

尖齿链

Sharp top chains






东华链号 Donghua Chain No.	P	H
	mm	mm
C 40-13STC	12.70	12.00

东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
08BF128	12.70	8.00	11.00	11.50

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
12AF91	19.05	34.90	43.80

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
60-911	19.05	9.25	18.00
60-912	19.05	9.20	17.95


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
LL1044F1	15.875	8.73	15.08

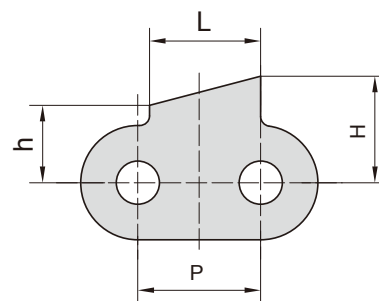


尖齿链

Sharp top chains

东华链号 Donghua Chain No.	P	h ₂	H	S	T
	mm	mm	mm	mm	mm
08AF29	12.700	10.60	15.6	—	1.50
08BF90	12.700	10.60	17.0	0.3	1.60
08B-1STCF15	12.700	10.20	17.0	—	1.60
10AF2	15.875	13.00	17.0	0.3	2.03
10AF15	15.875	15.09	17.0	—	2.03
10AF23	15.875	13.00	20.8	0.3	2.03
10AF48	15.875	13.00	16.9	—	2.03
10BF50	15.875	13.70	17.0	0.3	1.70
10AF58	15.875	15.09	17.0	—	2.03

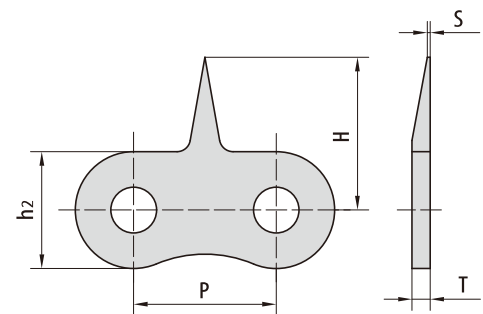



东华链号 Donghua Chain No.	P	h ₂	h	T	S	α
	mm	mm	mm	mm	mm	°
08BF25	12.70	10.6	15.6	1.60	—	30°
08BF29	12.70	10.6	14.5	1.60	0.8	30°
08BF30	12.70	10.6	14.5	1.60	0.3	30°
08BF35	12.70	10.6	21.5	1.60	0.6	30°
08BF67	12.70	10.6	16.1	1.60	0.3	30°
08BF195	12.70	10.6	14.5	1.60	0.4	30°
08AF10	12.70	10.6	15.6	1.50	—	30°
12B-1STCF1	19.05	15.0	19.0	1.85	—	30°
12AF33	19.05	15.6	19.7	2.42	0.6	18°

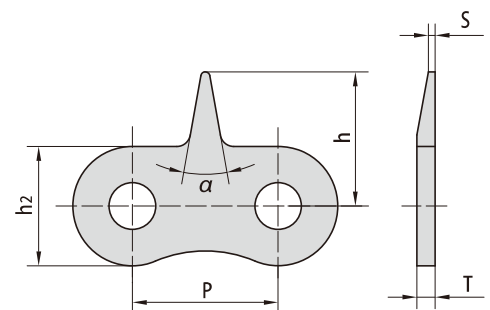

尖齿链

Sharp top chains

东华链号 Donghua Chain No.	P	H	α
	mm	mm	
06BF39	9.525	11.00	30°
08AF10	12.700	15.60	30°
08BF30	12.700	14.50	30°
08BF38	12.700	14.60	40°
08BF5	12.700	15.30	30°
08BF51	12.700	14.00	50°
08BF56	12.700	14.40	30°
08BF86	12.700	15.00	50°
08BSF11	12.700	14.60	40°
08A-1STCF10	12.700	13.80	30°
08AF66	12.700	17.10	45°
41-1STCF1	12.700	14.60	30°
08B-1STCF22	12.700	13.84	30°
08B-1STCF23	12.700	18.84	30°
08B-1STCF28	12.700	14.60	40°
08BF140	12.700	12.50	30°
08BF141	12.700	14.50	30°
10AF7	15.875	15.88	21°
10BF40	15.875	17.40	25°
10AF61	15.875	17.00	20°
10B-1STCF3	15.875	21.00	26°
10B-1STCF4	15.875	18.00	45°
12A-1STCF1	19.050	25.00	28°
12B-1STCF1	19.050	19.00	30°
12A-1STCF2	19.050	28.00	30°
16AF44	25.400	31.80	50°
16A-1STCF4	25.400	29.80	40°
16A-1STCF5	25.400	31.75	60°
20A-1STCF1	31.750	53.00	82.1°

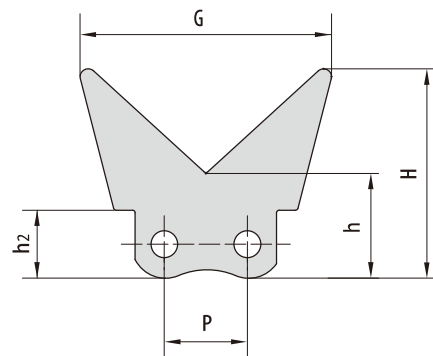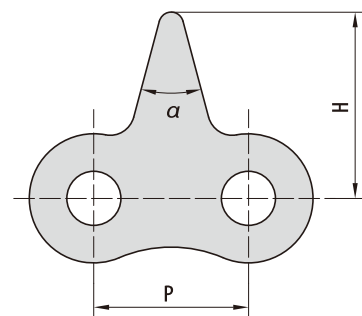


东华链号 Donghua Chain No.	P	H	h	h2	G
	mm	mm	mm	mm	mm
50F21	15.875	40.0	20.0	13.0	48.0


尖齿链

Sharp top chains


东华链号 Donghua Chain No.	P	L	h	H
	mm	mm	mm	mm
16B-1180	25.40	46.00	12.2	22.5

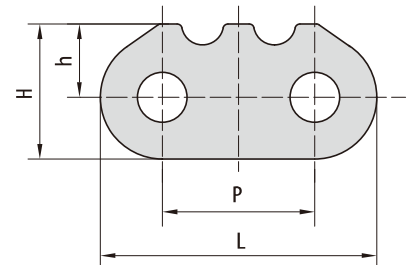


东华链号 Donghua Chain No.	P	L	h	H	α
	mm	mm	mm	mm	
25HF5-6STC	6.35	5.8	8.8	12.2	90°
16B-1185	25.40	46.0	16.0	26.5	75°
16B-6STC	25.40	46.0	16.0	26.5	73.4°

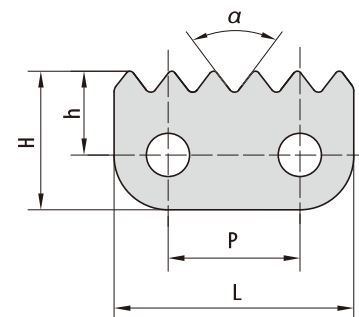


东华链号 Donghua Chain No.	P	h	H	α
	mm	mm	mm	
16B-2STCF1	25.40	15.0	24.75	88°
20A-2STCF1	31.75	23.0	35.95	80°
20A-2STCF3	31.75	23.0	35.95	82°
32B-2STCF1	50.80	34.0	55.00	91.46°

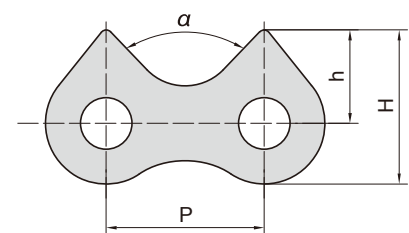

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
24B-1810	38.10	19.00	35.50
120F6	38.10	21.00	35.50

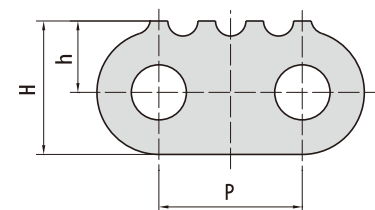


东华链号 Donghua Chain No.	P	L	h
	mm	mm	mm
16BF5	25.40	48.8	22.90
16BF6	25.40	46.0	30.00




尖齿链 Sharp top chains


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
C 12BF56-STC	19.05	13.00	22.00
16A-1171	25.40	16.00	26.40
C 16A-5PEP	25.40	17.40	29.00
C 16AF2	25.40	17.50	29.50
C 16A-5PEPF1	25.40	17.30	29.50
C 16BF2	25.40	18.70	29.20
16BF24	25.40	16.00	26.40
26BF29	25.40	15.90	26.40
C 16A-2-5PEPF1	25.40	17.30	29.50
16B-5STCF3	25.40	13.70	24.20
16B-5STCF4	25.40	13.90	24.40
16B-5STCF5	25.40	13.50	24.00
C 100-2-5STC	31.75	20.70	35.43
C 24B-1831	38.10	22.50	39.00
24A-1-STC	38.10	21.00	38.05

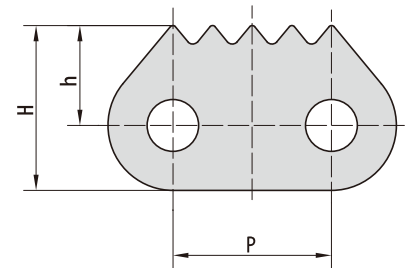


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
C 20BF9	31.75	19.80	33.00

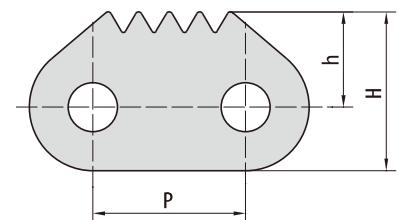

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
20BF8	31.75	19.80	33.00
20B-1310	31.75	19.80	33.00
20B-6STCF1	31.75	16.50	30.00
C 24B-6STCF1	38.10	23.50	40.00

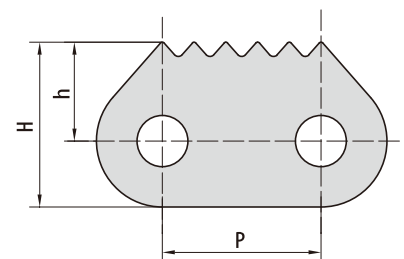

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
20B-1350	31.75	19.80	33.00

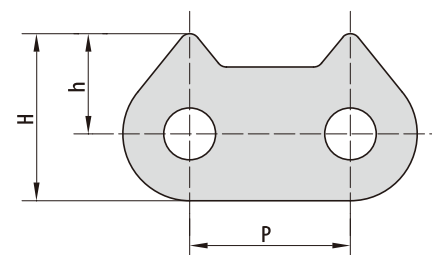




尖齿链 Sharp top chains

东华链号 Donghua Chain No.	P	L	h	H
	mm	mm	mm	mm
20AF1	31.75	57.20	14.75	35.84


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
20B-65TC	31.75	16.50	29.20

东华链号 Donghua Chain No.	P	L	h	H
	mm	mm	mm	mm
C 20A-1-45TC	31.75	46.75	18.3	33.3
120-1802	38.10	73.10	21.0	38.5
24B-1809	38.10	73.10	21.0	38.5


东华链号 Donghua Chain No.	P	L	h	H
	mm	mm	mm	mm
24B-1805	38.10	73.10	21.0	38.5
24B-1807	38.10	73.10	25.5	43.0
C 24B-1820	38.10	73.10	21.0	38.5

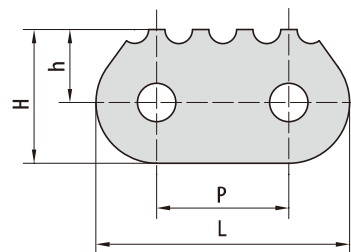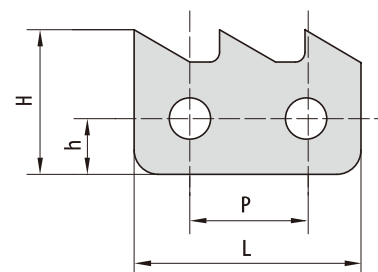


24B-1805



24B-1807




C 24B-1820




尖齿链

Sharp top chains


东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
32BF4	50.80	26.00	70.00	30.00

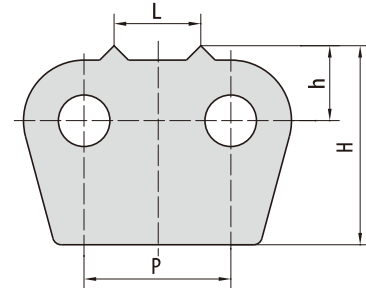


东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
32B-1875	50.80	27.00	72.00	19.00
32BF20-1875	50.80	30.00	74.00	13.50

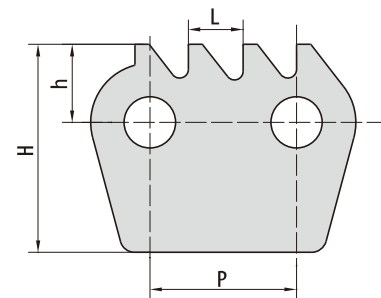


东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
32B-1876	50.80	27.00	72.00	50.80

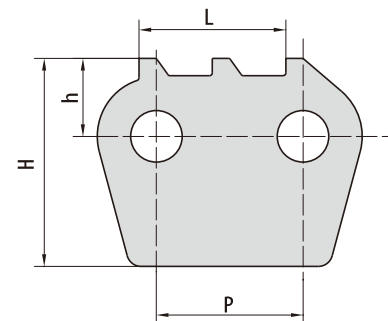

东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
32B-1877	50.80	30.00	51.00	50.80

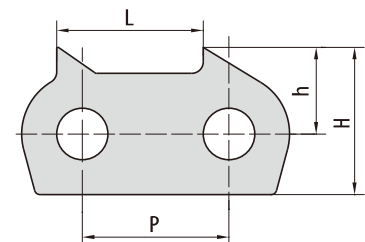


东华链号 Donghua Chain No.	P	h	H	L
	mm	mm	mm	mm
32B-1878	50.80	27.00	72.00	50.80

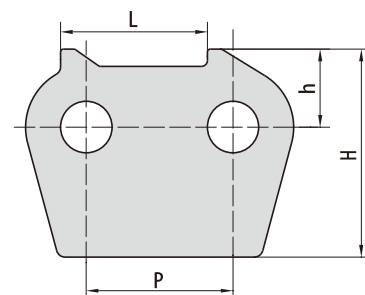


尖齿链 Sharp top chains


东华链号 Donghua Chain No.	P	G	h	H	α
	mm	mm	mm	mm	
08A-5STCF7	12.700	25.00	21.50	26.50	10°
08B-5STCF1	12.700	25.00	20.00	25.00	11°
08B-5STCF5	12.700	25.20	21.00	26.00	11°




东华链号 Donghua Chain No.	P	G	h ₁	H ₁	h	H	α
	mm	mm	mm	mm	mm	mm	
08A-5STCF1	12.7	24.7	9.25	15.25	10.65	16.65	67°

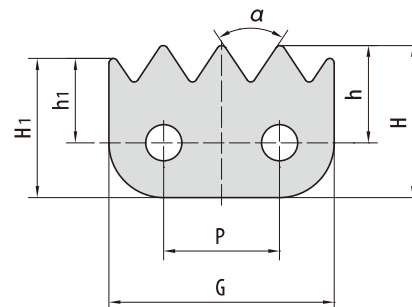

东华链号 Donghua Chain No.	P	G	h	H	α
	mm	mm	mm	mm	
12A-1STCF6	19.050	4.00	19.20	27.00	15°

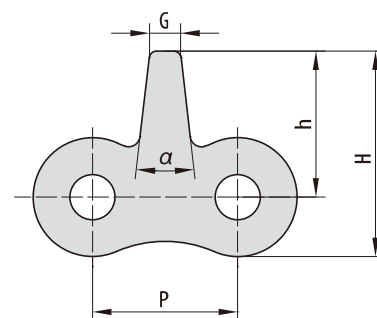


东华链号 Donghua Chain No.	P	h	h ₂	H	α
	mm	mm	mm	mm	
12A-1STCF4	19.050	24.20	15.60	32.00	30°

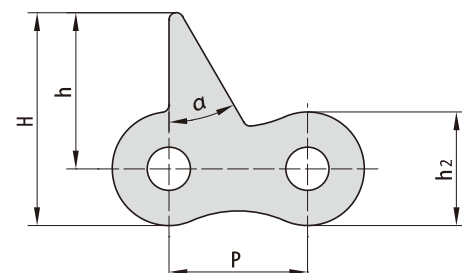


尖齿链

Sharp top chains


东华链号 Donghua Chain No.	P	h ₂	H	α
	mm	mm	mm	
80-STCF1	25.400	23.00	14.70	90°

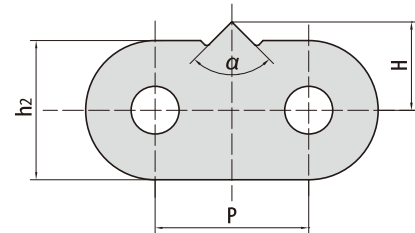


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
C 16A-2-4STCF1	25.400	16.50	28.00
16B-2-1172F1	25.400	15.00	25.50
C 20A-1-4STCF1	31.750	20.50	35.50

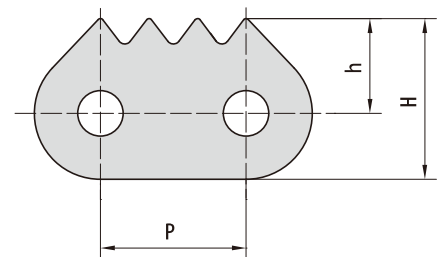


东华链号 Donghua Chain No.	P	h	H	α
	mm	mm	mm	
16A-1STCF3	25.40	62.00	72.25	26°

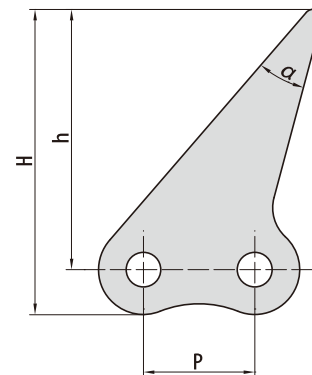

东华链号 Donghua Chain No.	P	h ₂	H	α
	mm	mm	mm	
C 20A-2-1STC	31.75	30.00	35.43	45°

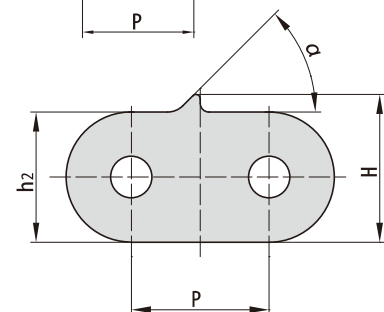


东华链号 Donghua Chain No.	P	G	h	H	α
	mm	mm	mm	mm	
06B-2STCF2	9.42	17.60	9.90	14.00	75°

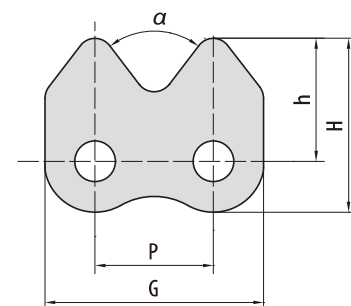


尖齿链 Sharp top chains


东华链号 Donghua Chain No.	P	h	H	α
	mm	mm	mm	
08B-2STCF1	12.70	9.80	15.10	60°

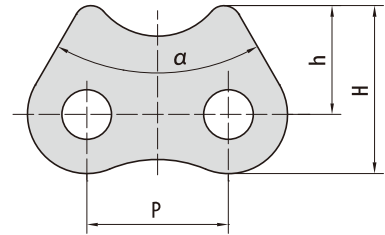


东华链号 Donghua Chain No.	P	h ₂	h	H	L	α
	mm	mm	mm	mm	mm	
08B-1STCF30	12.70	10.60	16.00	21.30	3.00	60°

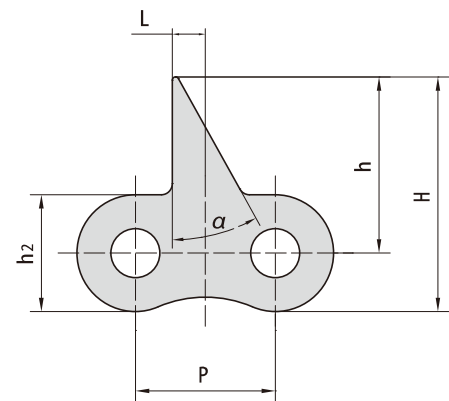

东华链号 Donghua Chain No.	P	G	h	H	α
	mm	mm	mm	mm	
08B-5STCF3	12.70	25.20	21.50	26.50	11°
08B-5STCF4	12.70	25.20	21.50	26.50	10°




东华链号 Donghua Chain No.	P	G	h	H	α
	mm	mm	mm	mm	
08B-4STCF2	12.70	25.20	21.50	26.50	9.8°




尖齿链 Sharp top chains


东华链号 Donghua Chain No.	P	L	h	H	α
	mm	mm	mm	mm	
08B-4STCF1	12.70	23.30	12.00	17.30	60°

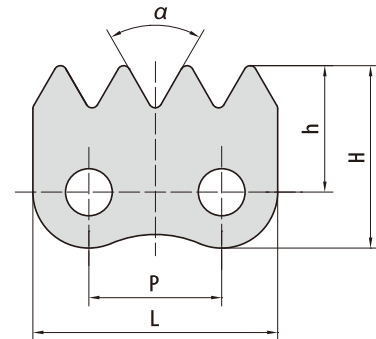


东华链号 Donghua Chain No.	P	H	S	α
	mm	mm	mm	
08B-2STCF2	12.70	10.60	0.50	30°

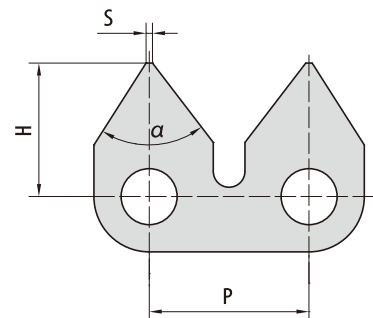

东华链号 Donghua Chain No.	P	h ₂	h	A
	mm	mm	mm	mm
08BF161	12.70	10.60	11.00	1.50

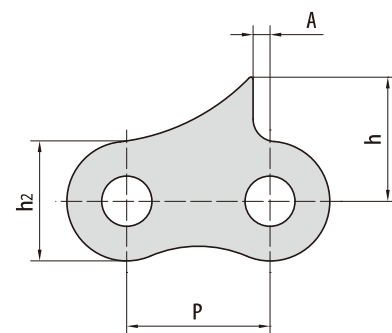


东华链号 Donghua Chain No.	P	h ₁	h ₂	h	H	α
	mm	mm	mm	mm	mm	
C 12B-1STCF3	19.050	8.00	14.30	12.00	20.00	24°

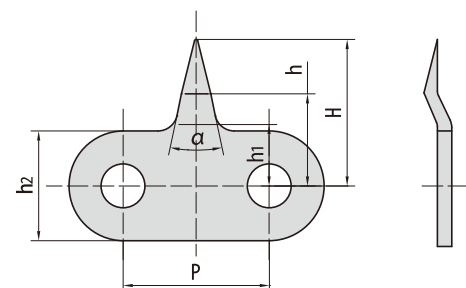


尖齿链

Sharp top chains


东华链号 Donghua Chain No.	P	h ₂	h	H
	mm	mm	mm	mm
C 16B-1STCF4	25.40	21.00	26.50	37.00

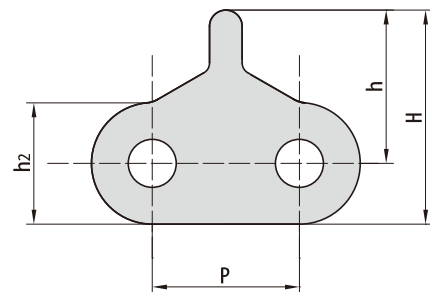


东华链号 Donghua Chain No.	P	L	h
	mm	mm	mm
16B-1STCF3	25.400	46.00	30.00

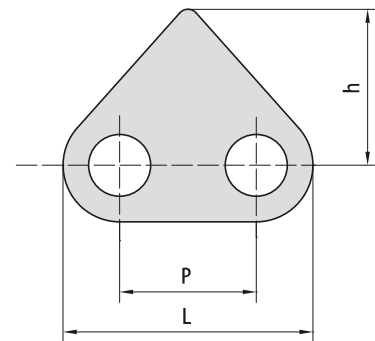


东华链号 Donghua Chain No.	P	h ₂	h	L	α
	mm	mm	mm	mm	
24B-2STC	38.10	32.00	19.00	25.00	90°

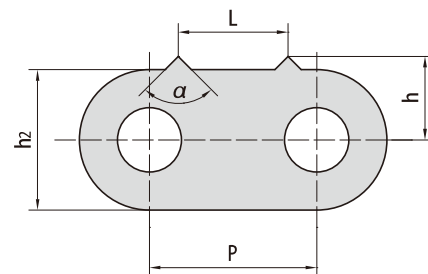

东华链号 Donghua Chain No.	P	h ₂	h	α
	mm	mm	mm	
C 24BSA0F1-4STC	38.10	35.00	21.00	64°

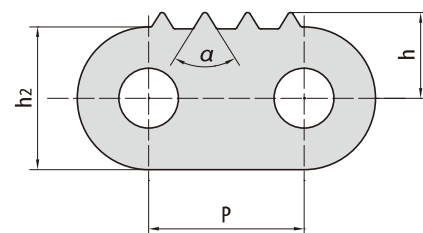


尖齿链 Sharp top chains

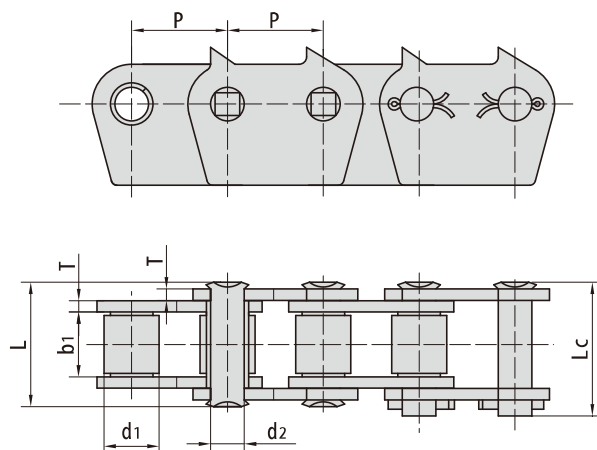


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
32B-1-1872	50.8	29.21	33.0	17.81	66.0	71.0	6.0	250.0/56818	275.0	13.54

32B-1872

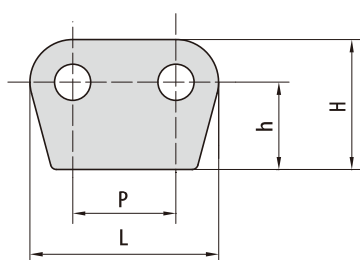


32B-1874
32B-1900F1
32BF15
C 32B-1874F1



东华链号 Donghua Chain No.	P	L	h ₁	h	H
	mm	mm	mm	mm	mm
32B-1872	50.8	92.8	-	43.0	64.0
32B-1874	50.8	92.8	21.0	30.0	73.0
32B-1900F1	50.8	92.8	21.0	30.0	75.0
32BF15	50.8	91.8	20.0	45.0	75.0
C 32B-1874F1	50.8	92.8	21.0	40.0	83.0


尖齿链

Sharp top chains

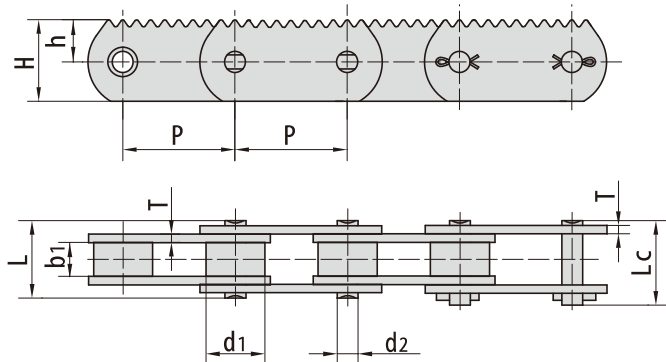

东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
P 80	80.0	30	58

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 80	80.0	42.0	24.0	15.0	55.0	60.0	6.0	250.0/56818	275.0	11.3

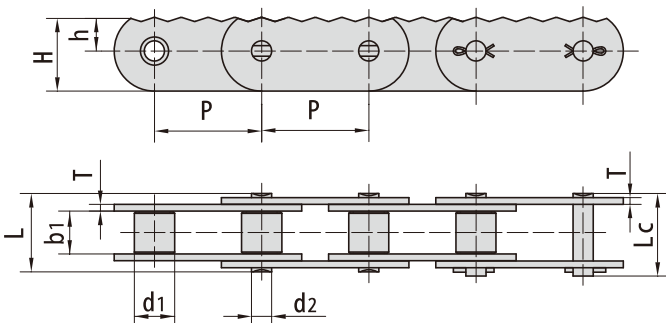


东华链号 Donghua Chain No.	P	h	H
	mm	mm	mm
P 80F3	80.0	25	55
P 80F32	80.0	20	40

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 80F3	80.0	30.0	32.0	15.0	58.6	62.6	5.0	98.0/20909	107.0	9.12
P 80F32	80.0	30.0	30.0	15.0	63.0	72.0	6.0	112.0/25194	123.2	7.28


尖齿链

Sharp top chains

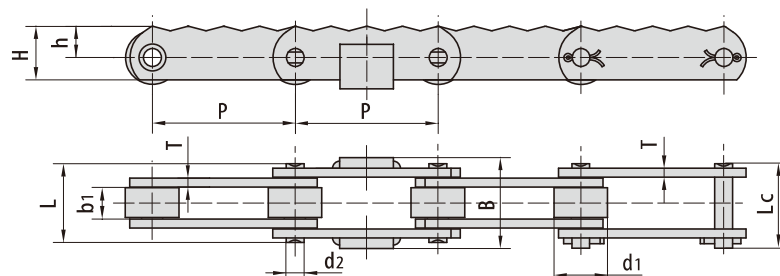


东华链号 Donghua Chain No.	P	h	H	B
P80F2	80.0	17.5	30.0	51

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P80F2	80.0	30.0	18.0	10.0	44.6	48.3	5.0	61.74/14030	70.0	4.15

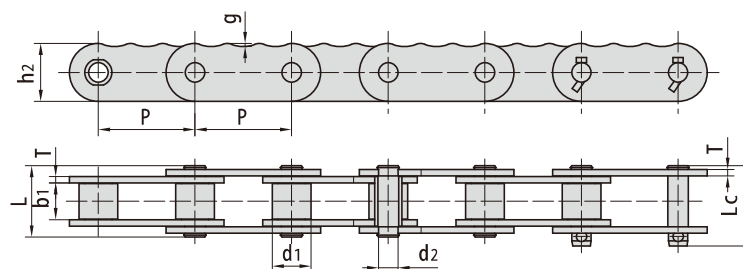


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		链板厚度 Plate thickness	抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	g	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P150F77	150.0	60.0	57.0	30.0	114.0	128.0	90.0	4.6	10.0	666.4/149812

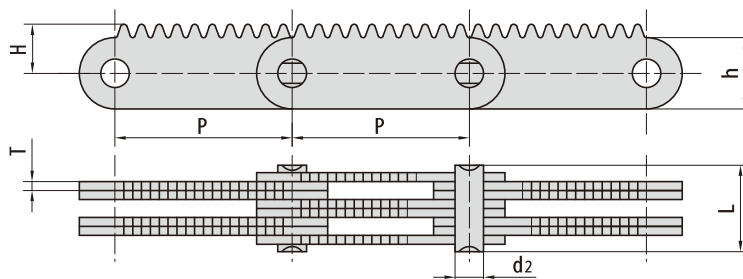

东华链号 Donghua Chain No.	节距 Pitch	链板组合 Plate lacing	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		孔中心到齿尖距离 Distance from hole center to tooth	抗拉强度 Tensile strength	每米长重 Weight per meter
	P		d2 max	L max	h max	T max	H max	Q min	q
	mm		mm	mm	mm	mm	mm	kN/bf	kg/m
F3144F1	31.60	4×4	5.08	16.1	12.7	1.6	8.75	40.0/8992	0.942
F2544F1	25.28	4×4	5.08	16.1	12.7	1.6	8.75	40.0/8992	0.987

尖齿链


Sharp top chains

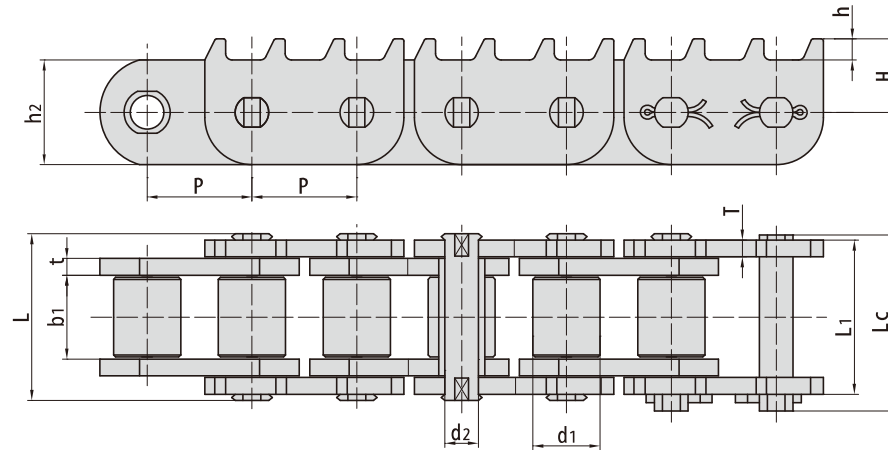

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length			链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	L_1 max	h_2 max	t/T max	h	H	Q_{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 50F19	50.0	32.0	40.0	16.0	79.5	84.0	-	50.0	8.0	10.0	35.0	260.0/58448	16.40
*P 50.8F54-B	50.8	32.0	42.0	16.0	-	-	75.2	51.0	8.0	8.5	34.0	107.8/24233	16.90

*套筒链：表中滚子直径 d_1 为套筒直径


*Bush chain: d_1 in the table indicates the external diameter of the bush.

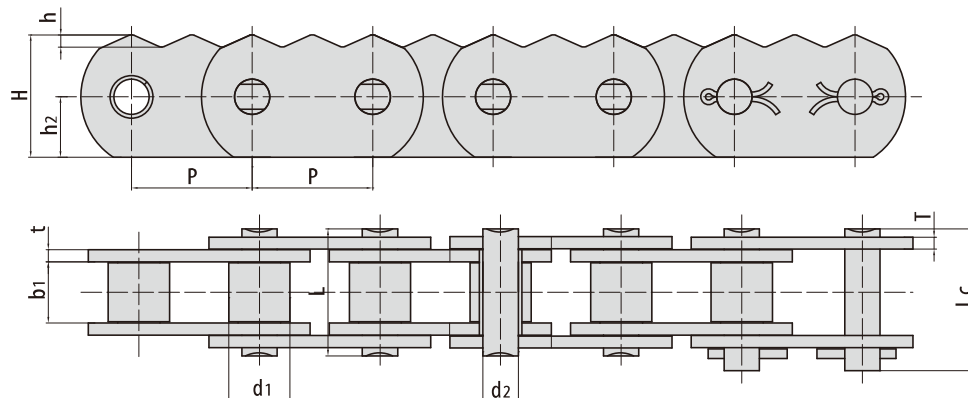


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	h_2 max	t/T max	h	H	Q_{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 50-3STC	50.0	25.4	25.40	14.63	53.4	57.8	25.0	5.0	5.0	50.0	120.0/26976	8.55
P 50F49-3STC	50.0	25.4	25.40	14.63	53.4	57.8	25.0	5.0	5.1	50.7	120.0/26976	8.60

尖齿链

Sharp top chains

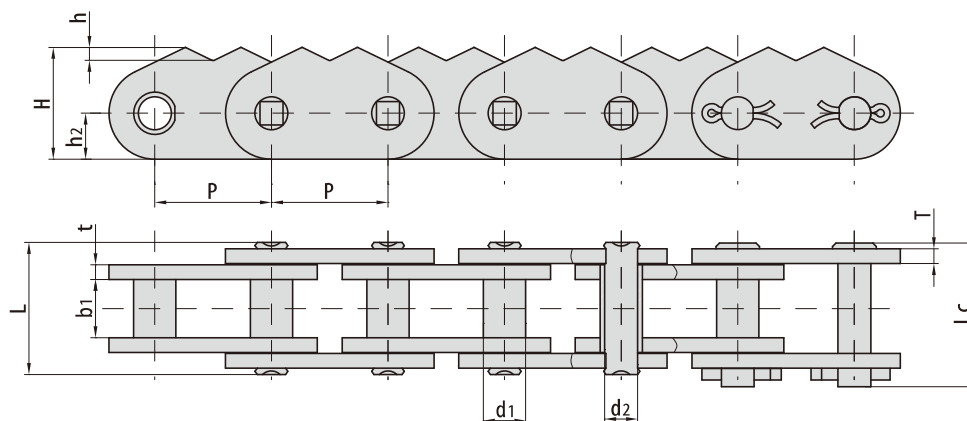


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	$d_{1 \max}$	$b_{1 \min}$	$d_{2 \max}$	$L_{\max}$	$L_{c \max}$	$h_{2 \max}$	$t/T_{\max}$	h	H	$Q_{\min}$	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P50.8F60-2STC-B	50.8	18.4	25.40	14.27	58.2	63.4	20.0	6.4	5.7	48.7	200.0/44960	8.30

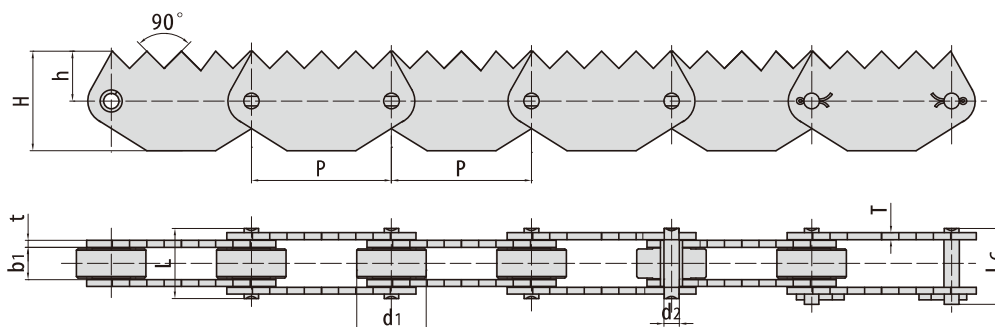


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	t/T _{max}	h	H	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P50.8F20	50.8	25.0	11.70	5.60	25.4	28.0	2.5	18.0	36.0	24.0/5395	2.25

尖齿链 Sharp top chains

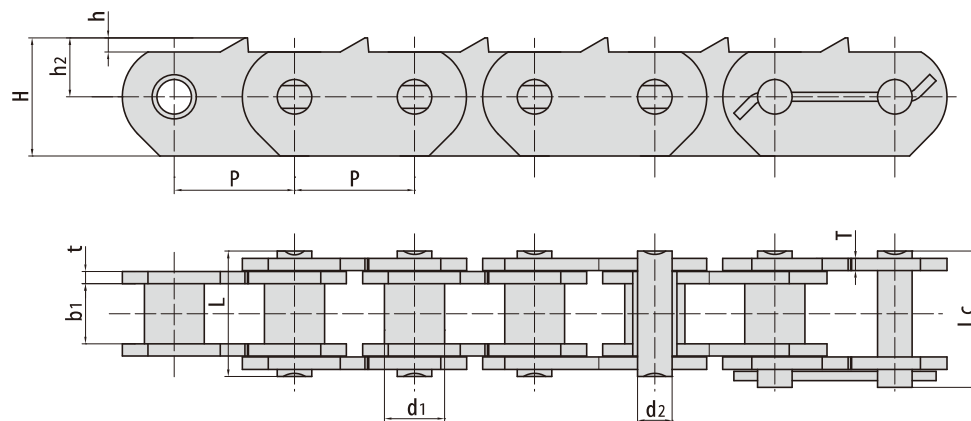


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	t/T _{max}	h	h ₂	H	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P50.8F11	50.8	25.0	25.40	14.63	52.8	57.1	5.2	6.0	25.0	50.0	145.0/32596	8.23

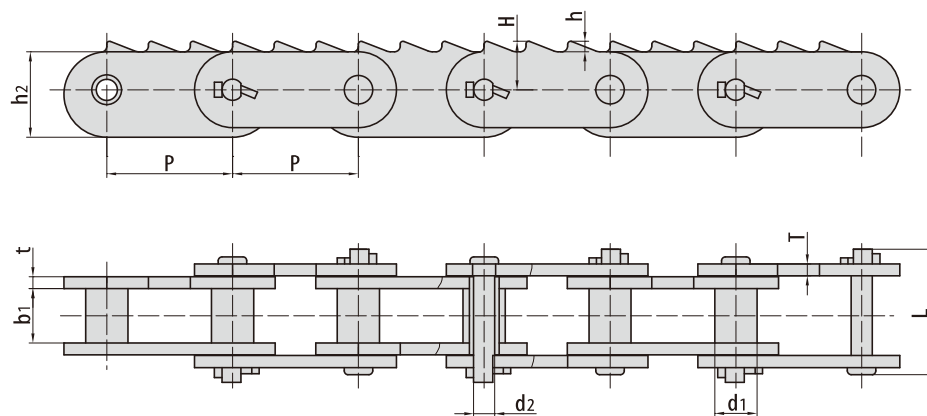


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	t/T _{max}	h ₂	h	H	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P66.26F3-3STC	66.26	22.22	28.60	11.10	42.2	42.2	6.4	45.0	5.5	25.5	110.0/24728	8.02

尖齿链

Sharp top chains

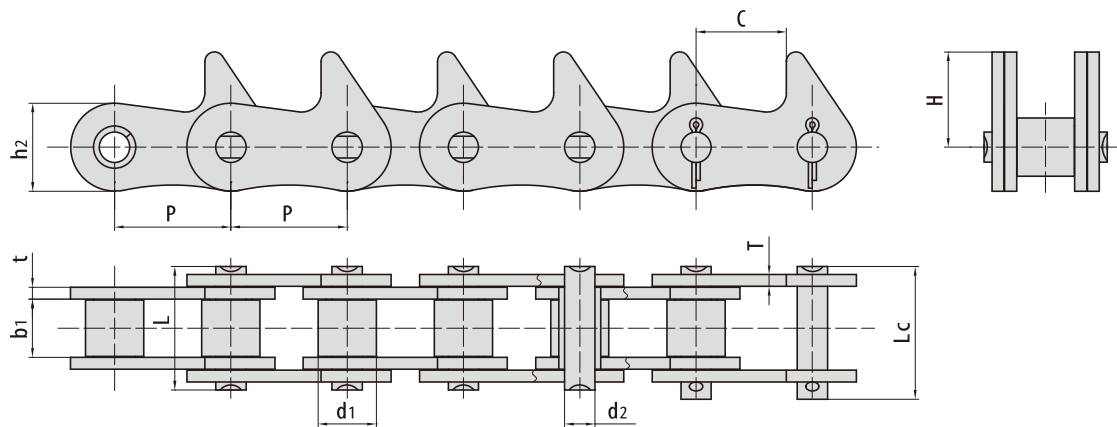


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	t/T max	h_2	C	H	Q_{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P31.75F18-1STC	31.75	15.88	15.88	11.1	34.0	36.5	3.25	24.0	24.65	26.0	60.0/13488	3.22
P38.1F29	38.10	15.88	15.88	11.1	34.0	36.5	3.25	24.0	24.65	26.0	60.0/13489	2.56

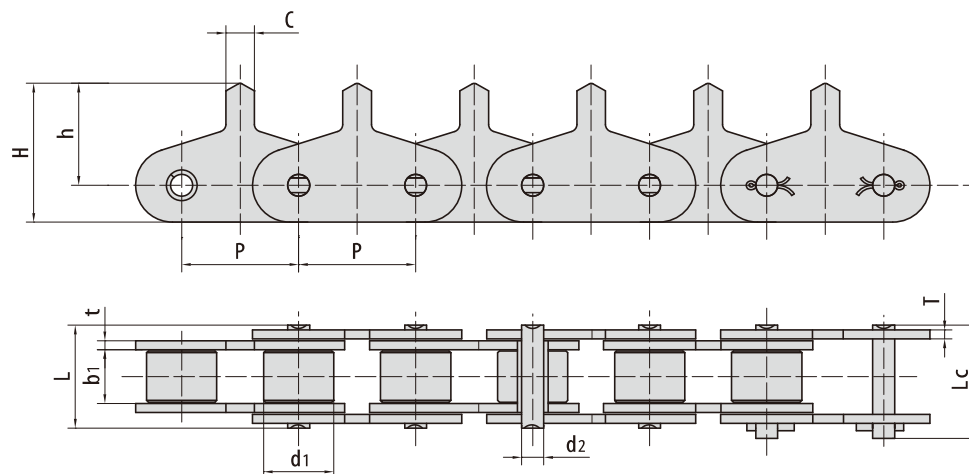


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	t/T max	C	h	H	Q_{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P31.75F2	31.75	19.05	14.50	5.94	27.5	30.2	2.42	7.8	27.7	37.7	31.8/7149	15.89

尖齿链

Sharp top chains

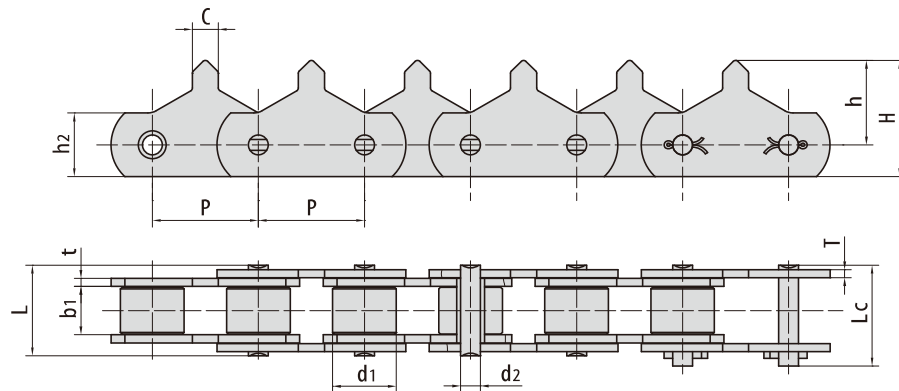


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension					抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	t/T max	h_2	C	h	H	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 31.75F14-1STC	31.75	19.05	5.94	5.94	27.5	30.2	2.42	19.0	7.8	25.3	34.8	31.80/7149	2.46
P 31.75F3	31.75	12.07	11.68	5.74	27.2	30.0	3.00	18.0	10.3	25.3	34.3	30.00/6744	2.46

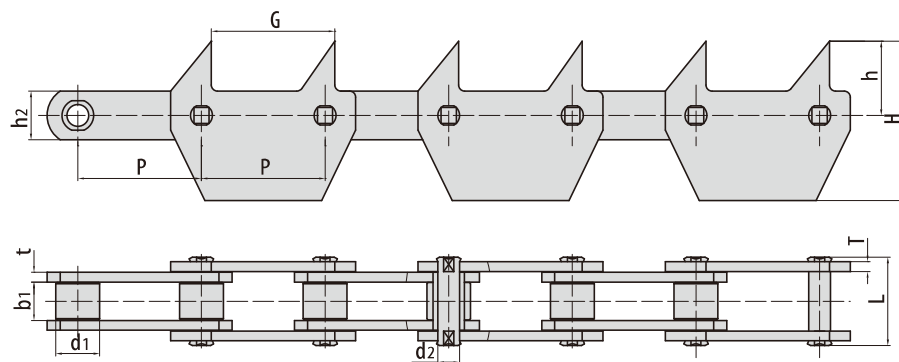


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension					抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	t/T max	h ₂	G	h	H	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 101.6F159-2STC	101.6	36.00	31.50	18.00	72.7	8.0	40.0	101.5	61.0	131.0	195.0/43836	14.42

尖齿链

Sharp top chains

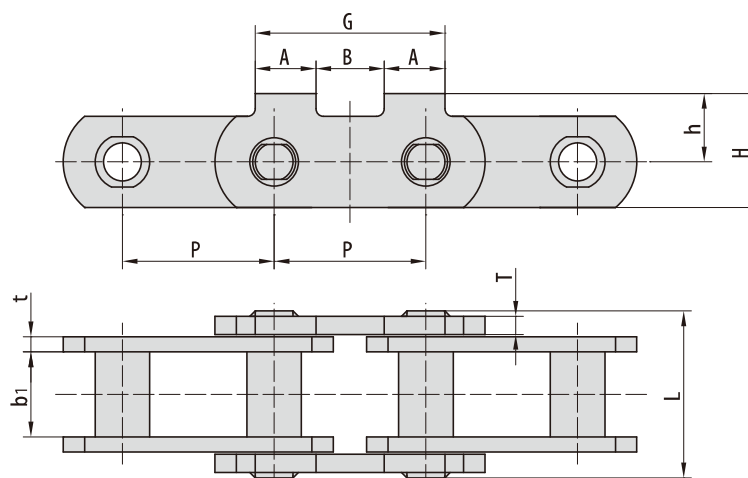


东华链号 Donghua Chain No.	P	b ₁	t/T	L	h	H	G	A	B
	mm	mm	mm	mm	mm	mm	mm	mm	mm
P100F314	100.00	55.00	10.0/12.0	110.00	45.00	75.00	125.00	40.00	45.00

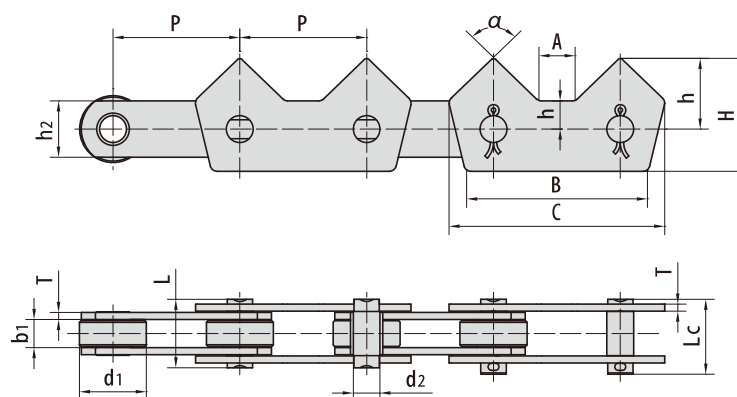

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension	抗拉强度 Tensile strength	每米长重 Weight per meter
	p	d _{1 max}	b _{1 min}	d _{2 max}	L _{max} L _{c max}	h _{2 max}	T	h H α	Q _{min} kN/bf	q kg/m
	mm	mm	mm	mm	mm mm	mm	mm	mm mm °		
P90F12-2STC	90.00	47.50	19.00	19.00	48.8 53.3	40.0	5.00	49.0 79.0 92°	100.0/22480	9.12

橡胶附板链


Roller chains with vulcanised elastomer profiles

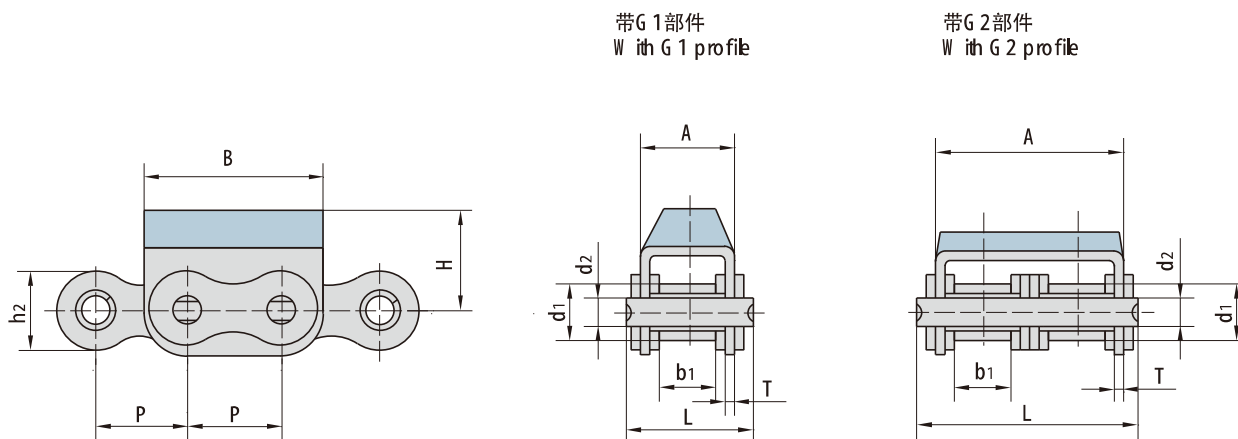


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension					抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	A	B	H	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
08B-G 1	12.700	8.51	7.75	4.45	20.0	11.80	14.60	24.20	12.3	1.60	18.0/4091	1.19
08B-G 2	12.700	8.51	7.75	4.45	34.3	11.80	28.40	24.20	12.3	1.50	32.0/7273	2.07
10A-G 1	15.875	10.16	9.40	5.08	24.5	15.09	17.50	31.00	17.0	1.60	21.8/4953	1.70
10B-G 1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	17.0	1.60	19.0/4318	1.62
10B-G 2	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	17.0	1.50	44.5/10004	2.56
10B-G 2F5	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	25.3	1.50	44.5/10004	2.58
12B-G 1	19.050	12.07	11.68	5.72	25.7	16.00	19.60	36.00	21.0	1.85	29.0/6591	2.01
12B-G 2	19.050	12.07	11.68	5.72	45.3	16.00	39.10	36.00	16.0	1.85	57.8/13136	3.21
12A-G 1	19.050	11.91	12.57	5.94	29.9	18.00	21.40	37.05	21.0	1.85	31.8/7153	2.55
12A-G 2	19.050	11.91	12.57	5.94	52.9	18.00	44.50	37.05	21.0	1.85	62.3/14005	4.25
12AF1-G 1	19.050	11.91	17.00	5.94	34.0	18.00	26.00	36.00	16.0	1.85	31.8/7153	2.62
16A-G 1	25.400	15.88	15.75	7.92	37.2	24.00	27.50	46.00	20.0	2.42	42.0/9545	3.97
16A-G 2	25.400	15.88	15.75	7.92	68.0	24.00	57.20	46.00	20.0	2.42	84/18896	7.27
16B-G 1F12	25.400	15.88	17.02	8.28	39.7	21.00	29.05	49.00	21.4	1.60	58.0/13047	3.95
20A-G 1	31.750	19.05	18.90	9.53	46.8	30.00	34.00	57.60	28.0	3.10	86.7/19503	6.15
20B-G 1	31.750	19.05	19.56	10.19	48.0	26.40	36.00	57.00	27.0	3.50	85.0/19318	6.19
24B-G 1	38.100	25.40	25.40	14.63	61.6	33.20	47.00	72.60	34.0	4.50	160.0/36363	11.25

橡胶附板链


Roller chains with vulcanised elastomer profiles

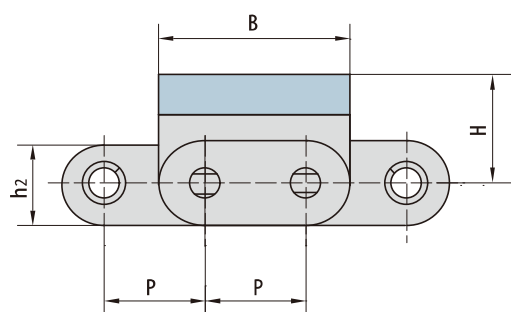

带G 1部件
With G 1 profile



带G 2部件
With G 2 profile

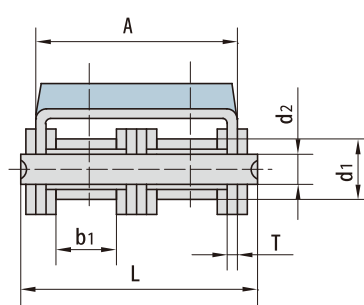


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension					抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	A	B	H	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
C 08B-G 1	12.700	8.51	7.75	4.45	20.0	11.80	14.60	24.20	12.3	1.60	18.0/4091	1.30
C 08B-G 2	12.700	8.51	7.75	4.45	34.3	11.80	28.40	24.20	12.3	1.50	32.0/7273	2.29
C 10B-G 1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	17.0	1.60	19.0/4318	1.75
C 10B-G 1F1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	13.0	1.60	19.0/4318	1.70
C 50-G 2F1	15.875	10.16	9.40	5.08	42.5	15.09	35.60	27.00	17.0	1.60	43.6/9906	2.14
C 50-G 2	15.875	10.16	9.40	5.08	42.5	15.09	35.60	31.00	17.0	1.60	43.6/9906	2.14
C 10B-G 2	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	17.0	1.50	44.5/10114	2.95
C 12B-G 1	19.050	12.07	11.68	5.72	25.7	16.00	19.60	36.00	21.0	1.85	29.0/6591	2.15
C 12B-G 2	19.050	12.07	11.68	5.72	45.3	16.00	39.10	36.00	16.0	1.85	57.8/13136	3.48
C 16A-G 1	25.400	15.88	15.75	7.92	37.2	24.00	27.50	46.00	20.0	2.42	42.0/9545	4.34
C 16A-G 2	25.400	15.88	15.75	7.92	68.0	24.00	57.20	46.00	20.0	2.42	84.0/18883	8.20
C 20A-G 1	31.750	19.05	18.90	9.53	46.8	30.00	34.00	61.75	28.0	3.10	86.7/19490	9.10
C 20B-G 1	31.750	19.05	19.56	10.19	48.0	26.40	36.00	57.00	27.0	3.50	85.0/19318	6.65
C 20B-G 2	31.750	19.05	29.56	10.19	85.0	26.40	73.00	58.15	27.0	3.50	170.0/38217	10.40
C 24B-G 1	38.100	25.40	25.40	14.63	61.6	33.20	47.00	72.60	34.0	4.50	160.0/36363	11.63


橡胶附板链

Roller chains with vulcanised elastomer profiles


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 1F1	12.700	18.0	24.2	12.3	1.6
10B-G 1F2	15.875	25.0	30.0	14.0	1.6
10B-G 1F3	15.875	20.0	30.0	18.0	1.6
10B-G 1F4	15.875	18.6	30.0	11.4	1.6

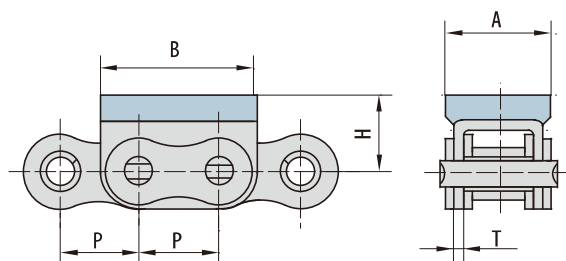

东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 1F4	12.7	18.0	24.2	12.3	1.6


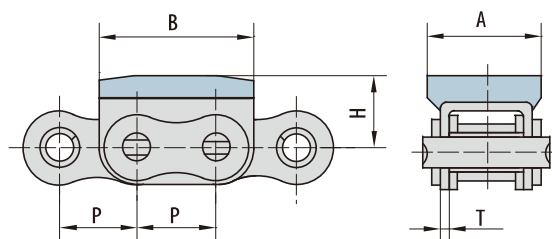


东华链号 Donghua Chain No.	P	A	B	H	T	L ₃
	mm	mm	mm	mm	mm	mm
08B-G 2F1	12.70	28.40	24.2	12.0	1.50	-
08B-G 1F14-DD 3	12.70	14.60	24.2	16.0	1.60	6.3
08B-G 2F15	12.70	28.40	24.2	12.8	1.50	-
08B-G 2F22	12.70	28.40	24.2	12.0	1.50	-
16A-G 2F3	25.40	27.50	49.0	21.4	2.42	-
16B-G 1	25.40	29.05	49.0	21.4	1.60	-
16B-G 1F11-DD 3	25.40	29.05	49.0	21.4	1.60	4.8
C 16B-G 1	25.40	29.05	49.0	21.4	1.60	-
C 16B-G 2	25.40	60.93	49.0	21.4	1.60	-
20B-G 1F2	31.75	36.00	57.0	35.0	3.50	-
24B-G 1F1	38.10	47.00	72.6	34.0	4.50	-
24B-G 1F7	38.10	47.00	72.6	34.0	4.50	-

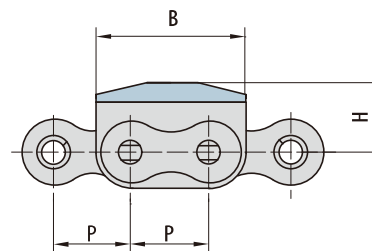



C 16B-G 1 20B-G 1F2
16B-G 1 24B-G 1F1
24B-G 1F7

C 16B-G 2
08B-G 2F1
08B-G 2F15
08B-G 2F22



16A-G 2F3


08B-G 1F14-DD 3
16B-G 1F11-DD 3




橡胶附板链

Roller chains with vulcanised elastomer profiles


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 1F17	12.700	14.60	24.2	20.2	1.60
10B-G 1F5	15.875	16.80	30.0	25.3	1.70
10A-G 1F6	15.875	16.80	30.0	14.0	1.60
12B-G 1F11	19.050	19.60	36.0	17.0	1.85
12A-G 1F12	19.050	39.10	36.0	21.0	1.85
12B-G 2F10	19.050	39.10	36.0	28.0	1.85
12A-G 2F12	19.050	39.10	36.0	21.0	1.85
12B-G 2F5	19.050	39.10	36.0	28.0	1.85
16A-G 1F1	25.400	27.50	46.0	21.4	2.42
16B-G 1F18	25.400	29.05	49.0	32.0	1.60
20B-G 1F1	31.750	36.00	57.0	35.0	3.50

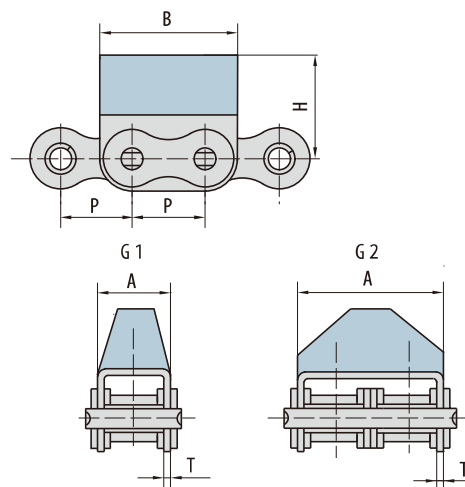


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
10B-G 2F1	15.875	33.3	30.0	17.0	1.5
24A-G 1F1	38.100	55.5	70.0	46.5	4.8

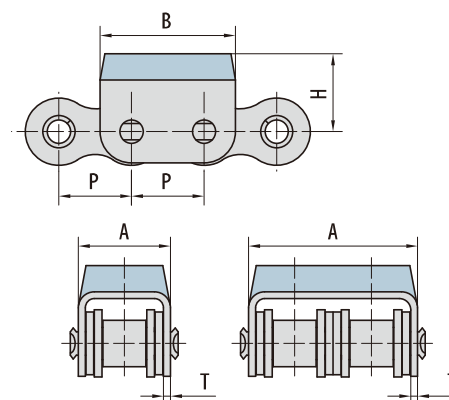

东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
12B-G 2F6	19.05	39.1	37.3	28.2	1.85

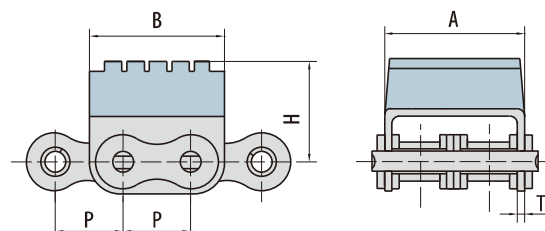


东华链号 Donghua Chain No.	P	A	B	G	h	H	T
	mm	mm	mm	mm	mm	mm	mm
16A-G 2F1	25.4	27.0	49.2	45.4	25.0	20.0	2.03

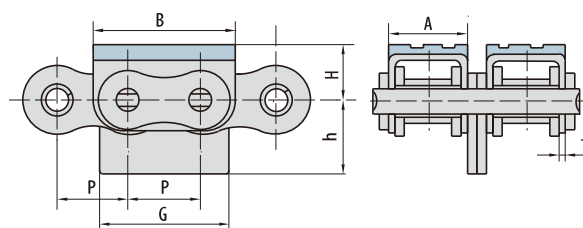


橡胶附板链

Roller chains with vulcanised elastomer profiles


东华链号 Donghua Chain No.	P	A	B	H	H ₁	T
	mm	mm	mm	mm	mm	mm
16A-G 1F3	25.4	27.5	49.0	8.25	21.4	2.42

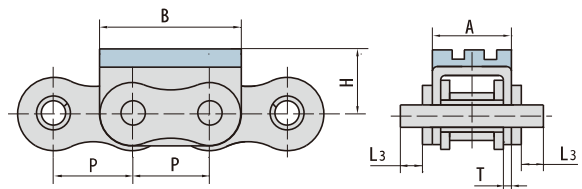


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
12AW K2-G 2F1	19.05	80.0	35.0	41.9	2.42

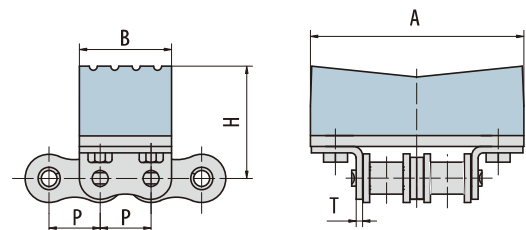

东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 1F15	12.70	18.00	24.20	20.00	1.60

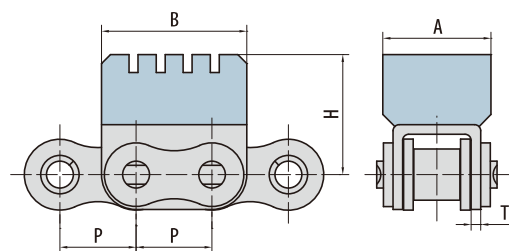


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
10B-G 2F6	15.875	33.30	30.00	17.00	1.50

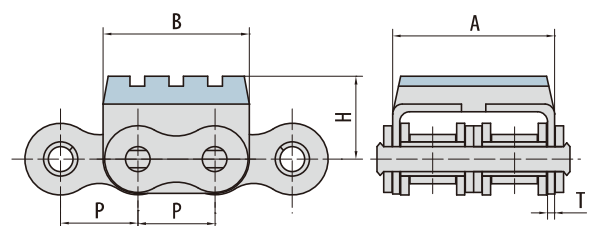


橡胶附板链

Roller chains with vulcanised elastomer profiles


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 2F18	12.70	28.40	24.20	14.30	1.50

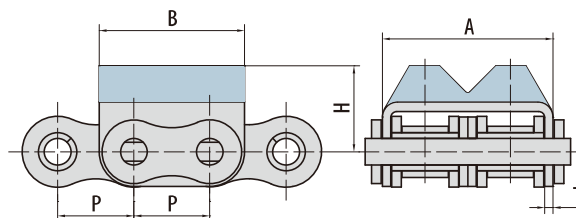


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G 2F11	12.70	28.4	24.2	18.3	1.50
12B-G 1F1	19.05	19.6	36.0	18.0	1.85
12B-G 2F4	19.05	39.1	36.0	27.5	1.85
12B-G 1F13	19.05	19.6	36.0	21.0	1.85
12B-G 2F13	19.05	39.1	36.0	27.5	1.85

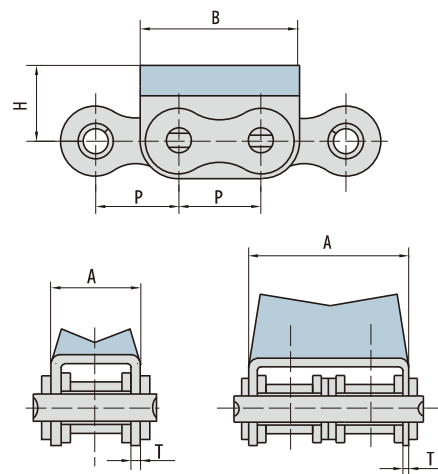

东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
12A-G 1F1	19.05	13.0	35.5	16.6	2.42

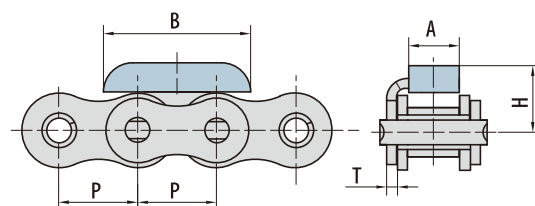


东华链号 Donghua Chain No.	P	A	B	H	h ₂	T
	mm	mm	mm	mm	mm	mm
16B-G 1F7	25.40	31.00	19.10	20.00	21.00	3.10
08B-G 1F16	12.70	12.85	23.30	11.40	11.80	1.30

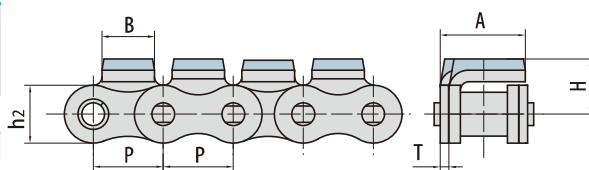


橡胶附板链

Roller chains with vulcanised elastomer profiles


东华链号 Donghua Chain No.	P	B	H	h ₄	T
	mm	mm	mm	mm	mm
06BF9	9.525	17.73	9.0	9.05	1.3

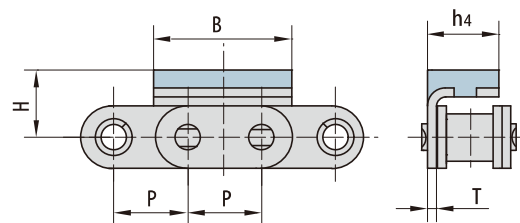


东华链号 Donghua Chain No.	P	A	B	H	T
	mm	mm	mm	mm	mm
12B-G 2F3	19.05	77.0	37.0	36.0	1.85
12B-G 2F8	19.05	101.0	37.0	36.0	1.85

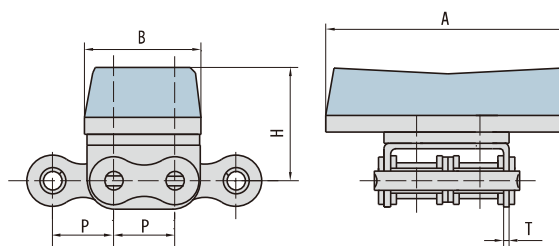


东华链号 Donghua Chain No.	P	A	B	H	H ₁	T
	mm	mm	mm	mm	mm	mm
08B-G 2F14	12.7	37.9	24.2	18.3	22.0	1.5

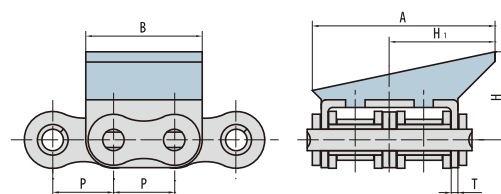


东华链号 Donghua Chain No.	P	A	B	H	H ₁	T
	mm	mm	mm	mm	mm	mm
08B-G 2F16	12.70	44.00	24.20	26.30	8.00	1.50
08B-G 2F17	12.70	39.00	24.20	21.30	8.00	1.50

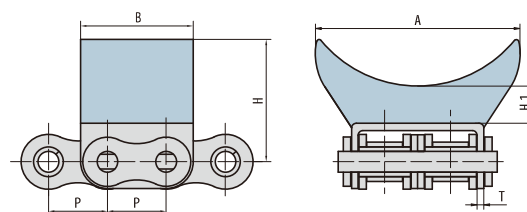


带U型附件滚子链 Roller chains with U type attachments

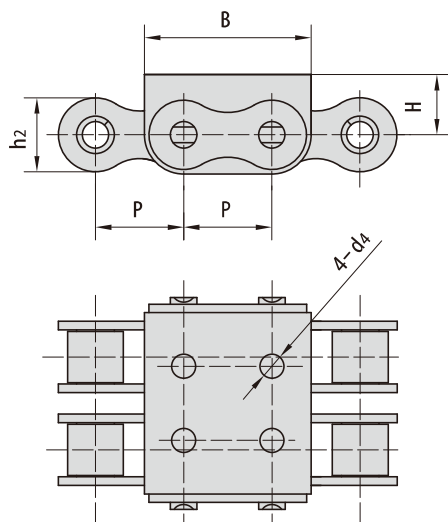

带U1部件
With U1 profile



带U2部件
With U2 profile



东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension						抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	A	B	H	d4	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
08B-U1	12.700	8.51	7.75	4.45	20.00	11.80	14.60	24.2	8.3	-	1.60	18.0/4091	1.13
08B-U2	12.700	8.51	7.75	4.45	34.30	11.80	28.40	24.2	8.3	-	1.50	32.0/7273	1.96
08B-U2F9	12.700	8.51	7.75	4.45	47.90	11.80	28.40	25.5	8.3	4.0	1.50	29.0/6519	2.00
10A-U1	15.875	10.16	9.40	5.08	24.50	15.09	17.50	31.0	11.3	5.0	1.60	21.8/4901	1.68
10A-U1F3	15.875	10.16	9.40	5.08	24.50	15.09	17.50	31.0	11.3	-	1.60	21.8/4901	1.68
10B-U1	15.875	10.16	9.65	5.08	23.20	14.70	16.80	30.0	11.3	5.0	1.60	19.0/4318	1.53
10B-U2	15.875	10.16	9.65	5.08	39.70	14.70	33.30	30.0	11.3	5.0	1.50	44.5/10004	2.47
10B-U1F7	15.875	10.16	9.65	5.08	23.20	14.70	16.80	30.0	10.3	-	1.60	22.2/4990	1.53
10B-U1F8	15.875	10.16	9.65	5.08	23.20	14.70	16.80	30.0	11.3	-	1.60	19.0/4318	1.52
10B-U2F2	15.875	10.16	9.65	5.08	39.70	14.70	33.30	30.0	11.3	-	1.50	44.5/10004	2.40
12A-U2F3	19.050	11.91	12.57	5.94	52.90	18.00	44.50	37.1	13.0	-	1.85	62.3/14005	2.97
12B-U1	19.050	12.07	11.68	5.72	25.70	16.00	19.60	36.0	13.0	5.0	1.85	29.0/6519	1.90
12B-U2	19.050	12.07	11.68	5.72	45.30	16.00	39.10	36.0	12.0	5.0	1.85	57.8/13136	3.03
16A-U1	25.400	15.88	15.75	7.92	37.20	24.00	27.50	46.0	16.0	-	2.42	56.7/12746	3.87
16B-U1	25.400	15.88	17.02	8.28	39.70	21.00	29.05	49.0	15.4	6.0	1.60	58.0/13407	3.73
16B-U2	25.400	15.88	17.02	8.28	71.70	21.00	60.93	49.0	16.2	-	1.60	106.0/26094	6.15
16B-U2F4	25.400	15.88	17.02	8.28	71.70	21.00	60.93	49.0	16.2	8.4	1.60	106.0/26094	6.64
16B-U2F8	25.400	15.88	17.02	8.28	75.50	21.00	64.73	49.0	16.5	-	3.50	106.0/23829	7.27
16B-U2F10	25.400	15.88	17.02	8.28	75.20	21.00	64.10	49.0	16.2	M 8	3.10	106.0/23829	7.86
20BF2	31.750	19.05	19.56	10.19	48.00	26.40	36.00	57.0	21.0	8.0	3.50	85.0/19318	6.01
20B-U1	31.750	19.05	19.56	10.19	48.00	26.40	36.00	57.0	21.0	-	3.50	85.0/19318	6.00
24B-U1	38.100	25.40	25.40	14.63	61.60	33.20	47.00	72.6	28.0	10.0	4.50	160.0/35969	10.88
24B-U1F4	38.100	25.40	25.40	14.63	61.60	33.20	47.00	72.6	28.0	-	4.50	160.0/35969	11.40


注：d4孔的数量和位置按产品图。

Note: the number and position of d4 hole is as per drawing.


带U型附件滚子链

Roller chains with U type attachments


东华链号 Donghua Chain No.	P	A	B	d4	H	T
	mm	mm	mm	mm	mm	mm
08B-U 1F1 (a)	12.700	14.6	24.2	M 4	9.50	1.60
10B-U 1F1 (a)	15.875	16.8	30.0	M 5	11.30	1.60
12B-U 1F10	19.050	19.6	36.0	M 5	13.00	1.85
16A-U 1F7	25.400	27.3	49.5	M 6	16.45	2.30
16B-U 1F3	25.400	30.3	49.5	M 6	16.45	2.30
16B-U 1F4	25.400	29.8	47.8	M 5	15.00	2.00
20B-U 1F3	31.750	36.0	57.0	M 6	21.00	3.50
24B-U 1F5	38.100	47.0	72.6	M 6	28.00	4.50

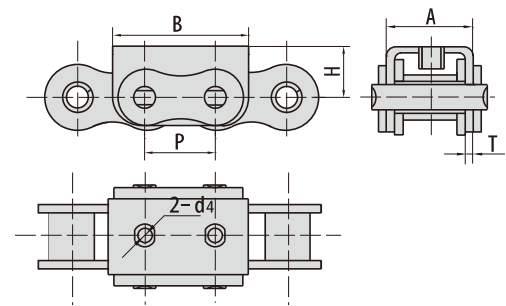

东华链号 Donghua Chain No.	P	A	B	C	d4	H	T
	mm	mm	mm	mm	mm	mm	mm
08B-U 2F2	12.700	28.4	24.2	17.5	3.3	8.3	1.50
10A-U 2F1	15.875	36.5	29.0	17.5	3.3	12.0	2.03
10B-U 2F3	15.875	33.3	30.0	16.5	4.0	11.3	1.50
12B-U 2F7	19.050	38.9	36.0	17.5	3.3	13.2	1.85

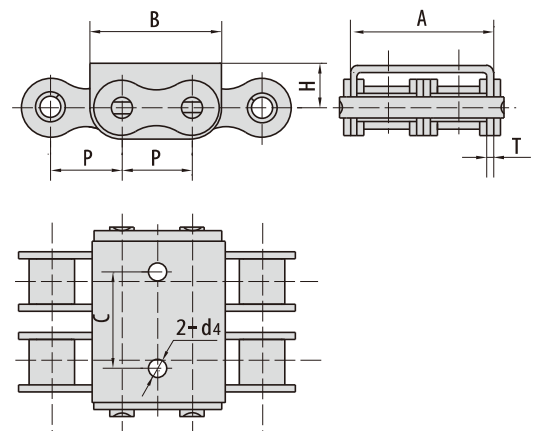


东华链号 Donghua Chain No.	P	A	B	C	d4	E	H	T
	mm	mm	mm	mm	mm	mm	mm	mm
16B-U 2F1	25.4	60.93	25.0	33.5	9.0	49.0	16.2	1.6
16B-U 2F5	25.4	64.10	25.0	-	-	46.4	17.0	3.1
16B-U 1F10	25.4	29.05	25.0	-	6.0	49.0	15.4	1.6

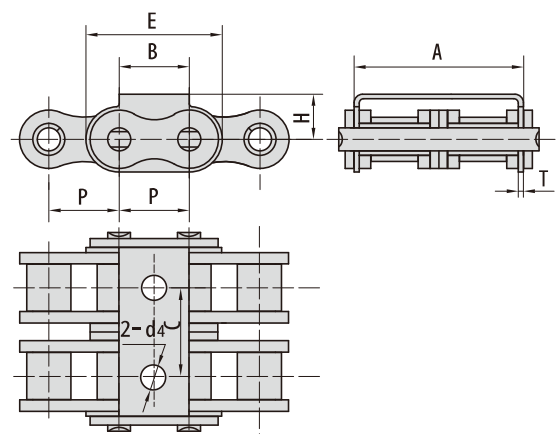


带U型附件滚子链

Roller chains with U type attachments


东华链号 Donghua Chain No.	P	A	B	d ₄	H	T	C	d ₁
	mm	mm	mm	mm	mm	mm	mm	mm
16B-U2F2	25.4	60.93	49.0	M 6	18.2	1.6	33.5	10.0
16B-U2F3	25.4	60.93	49.0	M 6	16.2	1.6	33.5	10.0

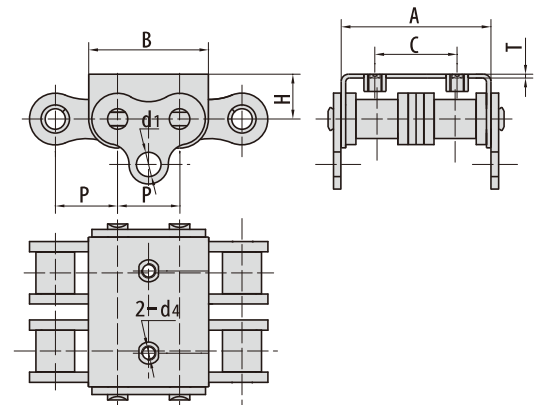


东华链号 Donghua Chain No.	P	B	H	H ₁	C	L
	mm	mm	mm	mm	mm	mm
16A-U2F8	25.4	45.9	17.0	20.0	41.0	10.0




东华链号 Donghua Chain No.	P	A	B	d ₄	H	T
	mm	mm	mm	mm	mm	mm
16A-U2F9	25.4	27.5	49.0	M 6	16.0	2.42

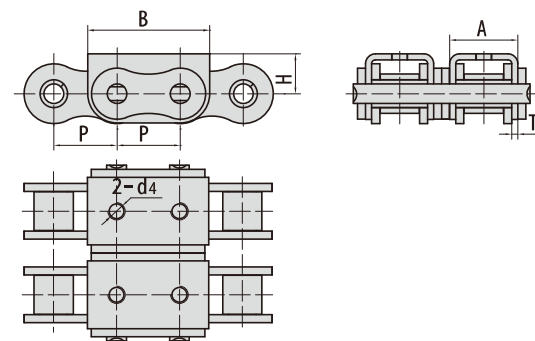


东华链号 Donghua Chain No.	P	A	B	C	d ₄	H	T
	mm	mm	mm	mm	mm	mm	mm
16B-U2F7	25.4	62.76	49.0	33.5	M 6	19.5	2.50
16B-U2F10	25.4	64.10	49.0	35.0	M 8	16.2	3.10

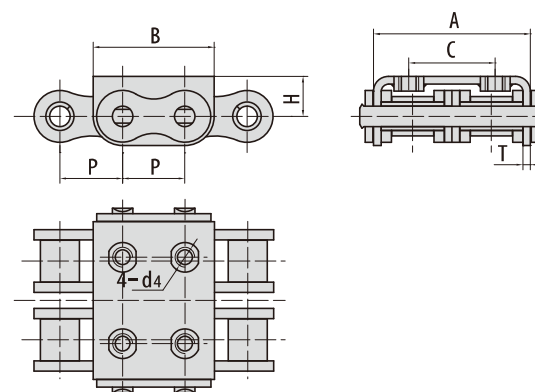

带塑料附板滚子链 Roller chains with plastic attachments

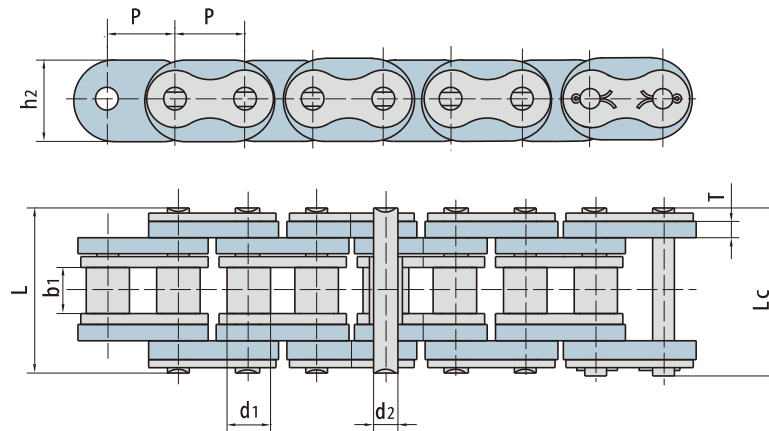

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板、附板尺寸 Plate & attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h ₂	T	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
16BF9	25.4	15.88	17.02	8.28	61.0	64.2	30.0	6.0	22.0/4949	3.7

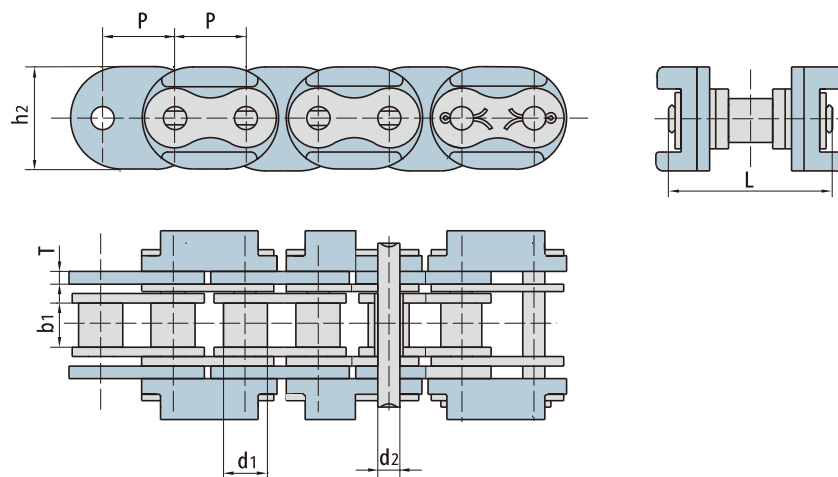


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板、附板尺寸 Plate & attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	T	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
20BF6	31.75	19.05	19.56	10.19	73.7		45.0	6.0	95.0/21591	6.35

塑料链

Plastic chains

工程塑料内链节轻型输送链


Engineering plastic inner link light-duty conveyor chains

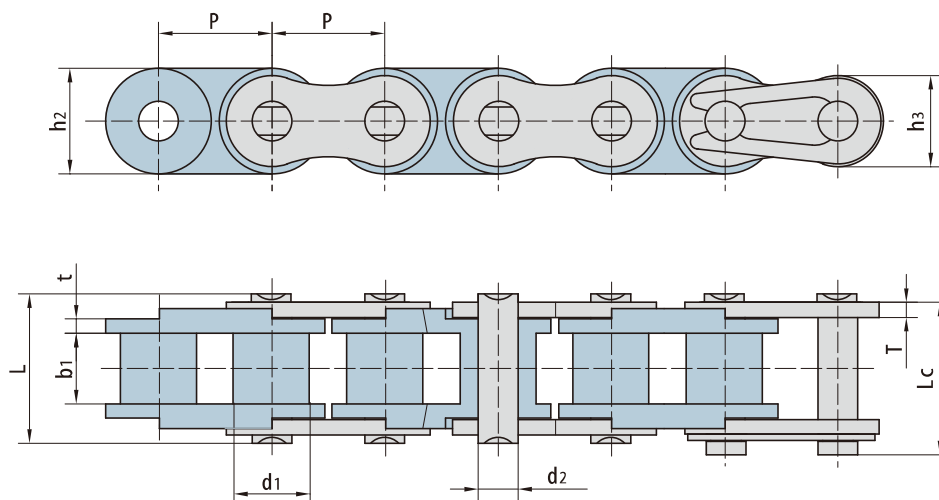

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth		链板厚度 Plate thickness	抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	h3 max	t/T	Q _m min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
04CPSa	6.350	3.30	3.10	2.31	7.9	8.4	6.0	5.06	0.80	0.6/136
06CPSa	9.525	5.08	4.68	3.58	12.4	13.2	9.0	7.80	1.30	1.1/250
08APSa	12.700	7.92	7.85	3.96	16.6	17.8	12.0	10.40	1.50	2.5/568
10APSa	15.875	10.16	9.40	5.08	20.7	22.2	15.1	13.00	2.03	3.5/795
12APSa	19.050	11.91	12.57	5.94	25.9	27.7	18.0	15.60	2.42	4.5/1023
16APSa	25.400	15.88	15.75	7.92	32.7	35.0	24.0	20.50	3.25	7.5/1686
08BPSa	12.700	8.51	7.75	4.45	16.7	18.2	11.8	10.60	1.60	2.5/568
10BPSa	15.875	10.16	9.65	5.08	19.5	20.9	14.7	13.70	1.70	2.8/629
12BPSa	19.050	12.07	11.68	5.72	22.5	24.2	16.0	15.00	1.85	4.2/1023
16BPSa	25.400	15.88	17.02	8.28	36.1	37.4	21.0	21.00	4.15/3.10	7.5/1686

塑料链 Plastic chains


工程塑料内链节轻型输送链
Engineering plastic inner link light-duty conveyor chains

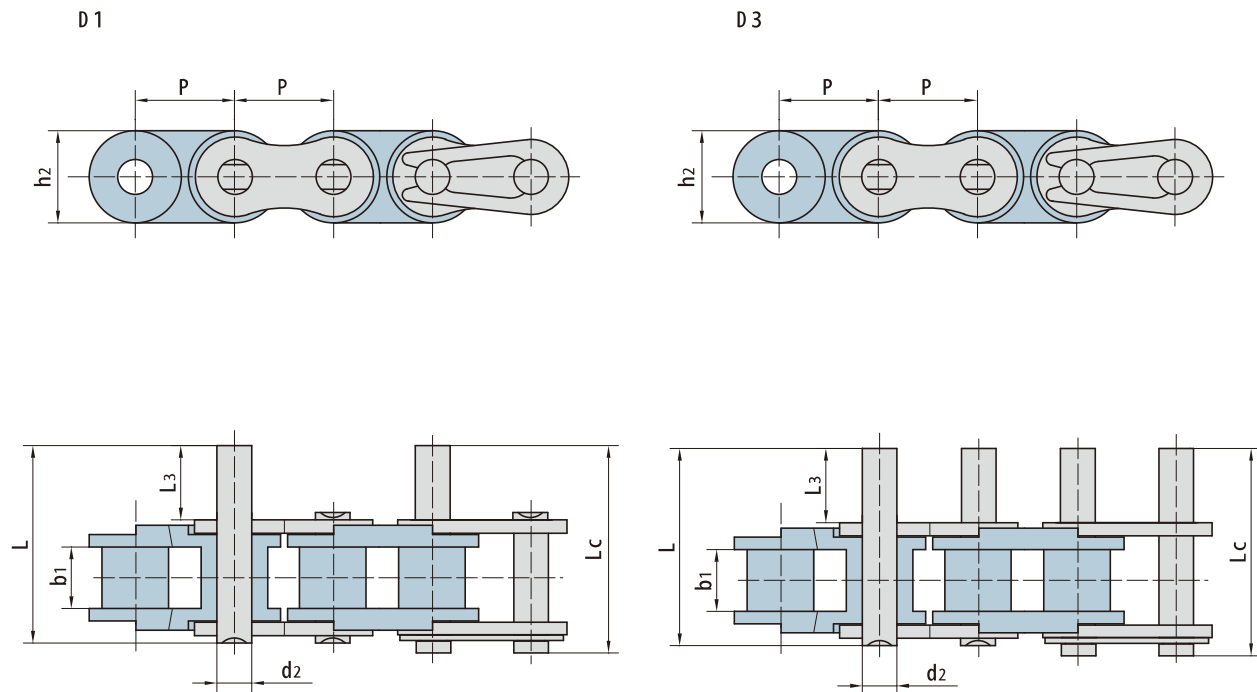

东华链号 Donghua Chain No.	P	b1	d2	h2	L3	L	Lc
	mm	mm	mm	mm	mm	mm	mm
06CPSa	9.525	4.68	3.58	9.0	9.5	20.8	21.6
08APSa	12.700	7.85	3.96	12.0	9.5	25.1	26.2
10APSa	15.875	9.40	5.08	15.1	11.9	31.3	33.1
12APSa	19.050	12.57	5.94	18.0	14.3	38.6	40.6
16APSa	25.400	15.75	7.92	24.0	19.1	50.3	53.3
08BPSa	12.700	7.75	4.45	11.8	9.5	25.1	26.6
10BPSa	15.875	9.65	5.08	14.7	11.9	30.1	31.5
12BPSa	19.050	11.68	5.72	16.0	14.3	35.4	37.1
16BPSa	25.400	17.02	8.28	21.0	19.1	53.0	54.3


塑料链

Plastic chains

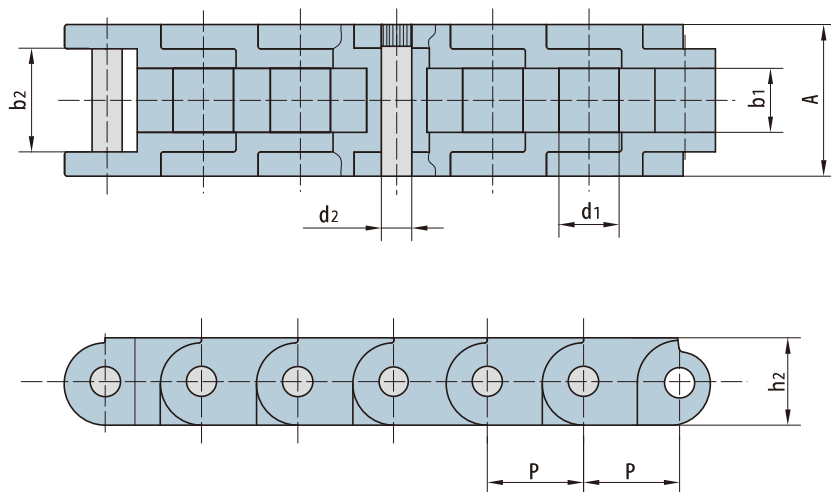

东华链号 Donghua Chain No.	P	b ₁	b ₂	d ₂	d ₁	A	h ₂	最大允许载荷 Max allowed load kN/bf
	mm	mm	mm	mm	mm	mm	mm	
PD60	19.05	12.7	20.7	6	11.94	30	17.3	0.88/198

带塑料滚子输送链 Conveyor chains with plastic rollers

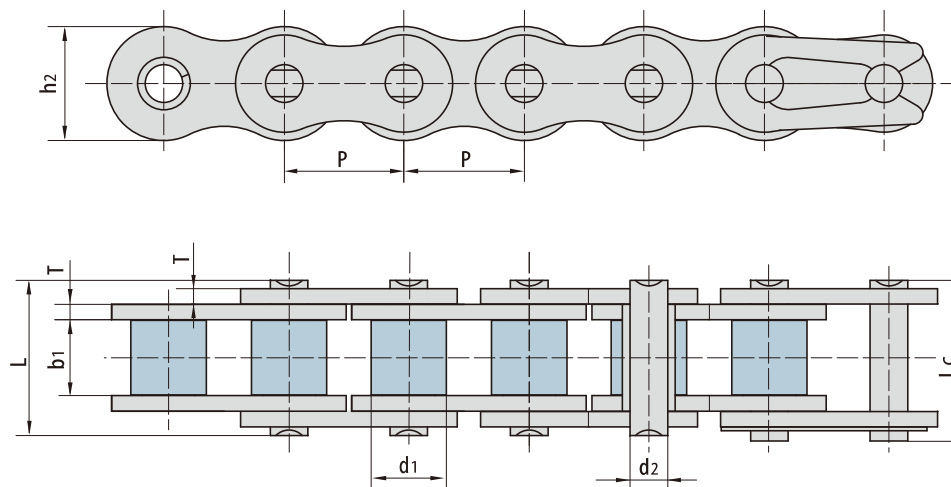


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	T	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
40-P	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.1/3205	17.5	0.56
50-P	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.2/5045	29.4	0.96
60-P	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.8/7227	41.5	1.35
80-P	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.7/12886	69.4	2.26
A 2050-P	31.750	10.16	9.40	5.08	20.70	22.20	15.00	2.03	22.2/5045	28.1	0.61


M系列输送链

Conveyor chains (M series)


1.无滚子
1. without rollers

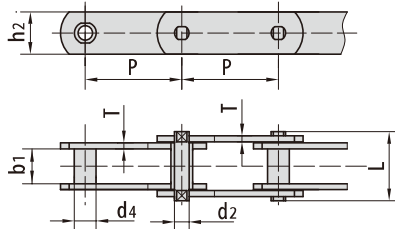


2.带S型小滚子
2. with S small rollers type




3.带P型大滚子
3. with P large rollers type



4.带F型带边滚子
4. with F flanged rollers type

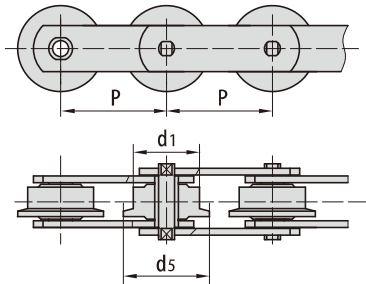

5.销轴铆头后采用焊接加固
5. Welded pins with plates

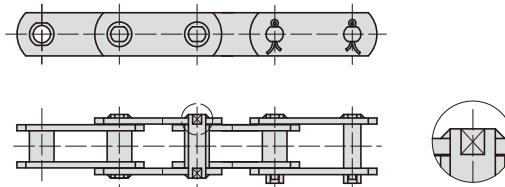

ISO 链号 ISO Chain No.	节距 Pitch								滚子直径 Roller diameter			套筒直径 Bush diameter
	P								d1	d7	d5	d4
	mm								max mm	max mm	max mm	max mm
M 20	*40.0	50.0	63.0	80.0	100.0	125.0	160.0		25.0	12.5	32.0	9.0
M 28	*50.0	63.0	80.0	100.0	125.0	160.0	200.0		30.0	15.0	36.0	10.0
M 40	63.0	80.0	100.0	125.0	160.0	200.0	250.0		36.0	18.0	42.0	12.5
M 56	*63.0	80.0	100.0	125.0	160.0	200.0	250.0		42.0	21.0	50.0	15.0
M 80	80.0	100.0	125.0	160.0	200.0	250.0	315.0		50.0	25.0	60.0	18.0
M 112	*80.0	100.0	125.0	160.0	200.0	250.0	315.0	400.0	60.0	30.0	70.0	21.0
M 160	*100.0	125.0	160.0	200.0	250.0	315.0	400.0	500.0	70.0	36.0	85.0	25.0
M 224	*125.0	160.0	200.0	250.0	315.0	400.0	500.0	630.0	85.0	42.0	100.0	30.0
M 315	*160.0	200.0	250.0	315.0	400.0	500.0	630.0		100.0	50.0	120.0	36.0
M 450	200.0	250.0	315.0	400.0	500.0	630.0	800.0		120.0	60.0	140.0	42.0


ISO 链号 ISO Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	b1	d2	L	h2	T	Q _{min}	Q ₀
	mm	max mm	max mm	max mm	max mm	kN/bf	kN
M 20	16.0	6.0	35.0	19.0	2.5	20.0/4545	25.0
M 28	18.0	7.0	40.0	21.0	3.0	28.0/6364	35.0
M 40	20.0	8.5	45.0	26.0	3.5	40.0/9091	50.0
M 56	24.0	10.0	52.0	31.0	4.0	56.0/12727	70.0
M 80	28.0	12.0	62.0	36.0	5.0	80.0/18182	100.0
M 112	32.0	15.0	73.0	41.0	6.0	112.0/25454	140.0
M 160	37.0	18.0	85.0	51.0	7.0	160.0/36364	200.0
M 224	43.0	21.0	98.0	62.0	8.0	224.0/50909	280.0
M 315	48.0	25.0	112.0	72.0	10.0	315.0/71591	393.7
M 450	56.0	30.0	135.0	82.0	12.0	450.0/102272	562.5

*链条仅有套筒和小滚子
*Chain has bush and small roller only


M系列输送链

Conveyor chains (M series)


1.无滚子
1. without rollers

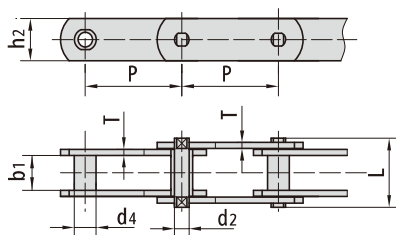


2.带S型小滚子
2. with S small rollers type




3.带P型大滚子
3. with P large rollers type



4.带F型带边滚子
4. with F flanged rollers type

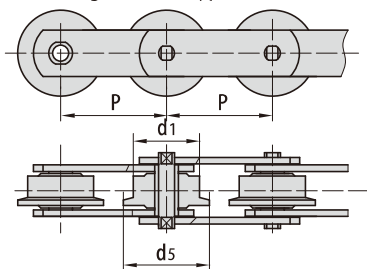

5.销轴铆头后采用焊接加固
5. Welded pins with plates

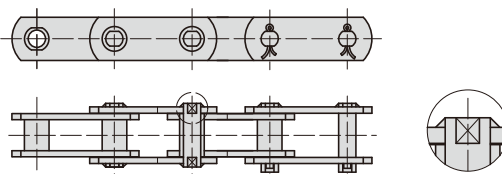


D IN 链号 D IN Chain No.	节距 Pitch							滚子直径 Roller diameter			套筒直径 Bush diameter
	P							d1	d7	d5	d4
	mm							max mm	max mm	max mm	max mm
M 20	40.0	50.0	63.0	80.0	100.0	125.0	160.0	25.0	12.50	30.00	9.0
M 28	50.0	63.0	80.0	100.0	125.0	160.0	200.0	30.0	15.00	36.00	10.0
M 40	63.0	80.0	100.0	125.0	160.0	200.0	250.0	36.0	18.00	42.00	12.5
M 56	63.0	80.0	100.0	125.0	160.0	200.0	250.0	42.0	21.00	50.00	15.0
M 80	80.0	100.0	125.0	160.0	200.0	250.0	315.0	50.0	25.00	60.00	18.0
M 112	80.0	100.0	125.0	160.0	200.0	250.0	315.0	60.0	30.00	70.00	21.0
M 160	100.0	125.0	160.0	200.0	250.0	315.0	400.0	70.0	36.00	85.00	25.0
M 224	125.0	160.0	200.0	250.0	315.0	400.0	500.0	85.0	42.00	100.00	30.0
M 315	160.0	200.0	250.0	315.0	400.0	500.0	630.0	100.0	50.00	120.00	36.0
M 450	200.0	250.0	315.0	400.0	500.0	630.0	800.0	120.0	60.00	140.00	42.0

D IN 链号 D IN Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	b1	d2	L	h2	T	Q	Q0
	mm	mm	mm	mm	mm	kN/bf	kN
M 20	16.0	6.0	35.0	18.0	2.5	20.0/4545	25.0
M 28	18.0	7.0	40.0	20.0	3.0	28.0/6364	35.0
M 40	20.0	8.5	45.0	25.0	3.5	40.0/9091	50.0
M 56	24.0	10.0	52.0	30.0	4.0	56.0/12727	70.0
M 80	28.0	12.0	62.0	35.0	5.0	80.0/18182	100.0
M 112	32.0	15.0	73.0	40.0	6.0	112.0/25454	140.0
M 160	37.0	18.0	85.0	50.0	7.0	160.0/36364	200.0
M 224	43.0	21.0	98.0	60.0	8.0	224.0/50909	280.0
M 315	48.0	25.0	112.0	70.0	10.0	315.0/71591	393.7
M 450	56.0	30.0	135.0	80.0	12.0	450.0/102272	562.5

M系列输送链

Conveyor chains (M series)

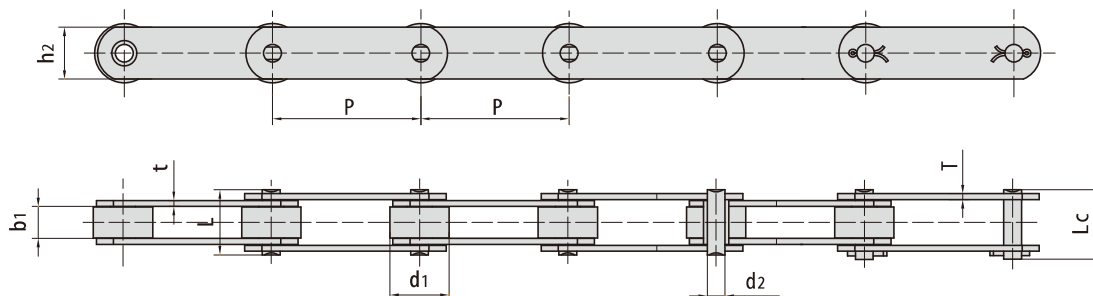


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1	b1	d2	L	Lc	h2	t/T	Q _n	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 18F1-P-50	50.0	25.00	11.50	5.72	26.0	28.2	18.0	2.5	18.0/4050	20.0	1.81
M 20-PF1-50	50.0	30.00	16.00	6.00	31.0	33.5	18.0	2.5	20.0/4500	22.0	2.60
M 22-P-50	50.0	25.00	11.50	8.00	28.0	30.9	20.0	3.0	22.0/4950	24.2	2.64
M 22F1-P-50	50.0	25.00	12.00	10.00	29.4	32.6	20.0	3.0	22.0/4950	24.2	2.30
M 28F4-S-50	50.0	15.00	17.00	7.00	33.0	36.5	20.0	3.0	28.0/6300	35.0	1.88
M 28F5-P-63	63.0	30.00	18.00	7.00	42.0	45.5	25.0	5.0	40.0/9000	50.0	4.23
M 28F8-P-80	80.0	25.00	16.00	7.00	33.0	36.2	20.0	3.0	28.0/6294	31.0	1.89
M 35F2-S-35	35.0	14.00	14.00	7.00	31.0	34.0	18.0	3.5/2.5	35.0/7874	39.0	1.82
M 35F2-P-35	35.0	22.00	14.00	7.00	31.0	34.0	18.0	3.5/2.5	35.0/7874	39.0	2.47
*M 35F3-B-35	35.0	14.00	14.00	6.00	30.2	33.0	18.0	3.0	35.0/7874	39.0	1.73
M 35F4-C-69	69.0	25.00	12.00	7.00	27.5	30.0	19.0	2.5	35.0/7874	39.0	1.60
M 35F5-P-50.8	50.8	25.00	16.00	7.00	33.0	36.0	20.0	3.0	35.0/7874	39.0	2.48
M 35F9-P-50	50.0	25.00	16.00	6.00	30.4	32.7	18.0	2.5	33.0/7425	36.0	2.23
M 35F10-P-50	50.0	20.00	16.00	7.00	33.0	36.0	25.0	3.0	35.0/7874	39.0	2.53
M 35F11-P-35	35.0	20.00	16.00	7.00	31.0	34.0	18.0	2.5	35.0/7874	39.0	2.22
M 40-PF1-100	100.0	36.00	20.00	8.50	40.5	44.5	25.0	3.5	40.0/9000	44.0	3.28
M 40F4-P-50	50.0	31.75	15.00	10.00	36.6	39.0	25.0	4.0	40.0/9000	44.0	4.00
M 40F5-S-65	65.0	24.00	15.00	10.00	36.6	39.0	30.0	4.0	40.0/9000	44.0	4.86
M 40F6-P-80	80.0	36.00	20.00	8.50	41.0	44.2	25.0	4.0	40.0/9000	44.0	3.68
M 40F17-P-50.8	50.8	31.00	15.20	13.35	38.0	42.8	25.0	5.0/4.0	53.9/12127	59.2	4.45
M 40F22-P-100	100.0	40.00	32.00	14.00	63.7	69.0	50.0	6.0	195.0/43838	214.5	10.30
M 56-SF1-63	63.0	25.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	2.31
M 56-PF1-80	80.0	25.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	3.61
M 56-SF1-80	80.0	50.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	6.96
M 56F14-S-63	63.0	21.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	3.81
M 56F14-S-80	80.0	21.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	3.27
M 56F14-P-100	100.0	42.00	24.00	10.00	46.0	49.5	30.0	4.0	56.0/12600	61.6	5.00
M 56F21-P-100	100.0	42.00	24.00	12.00	54.7	59.5	30.0	6.0	56.0/12600	61.6	6.30
M 56F28-P-100	100.0	31.00	15.00	10.00	38.2	43.0	30.0	4.0	56.0/12600	61.6	3.20

*套筒链: 表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

M系列输送链

Conveyor chains (M series)

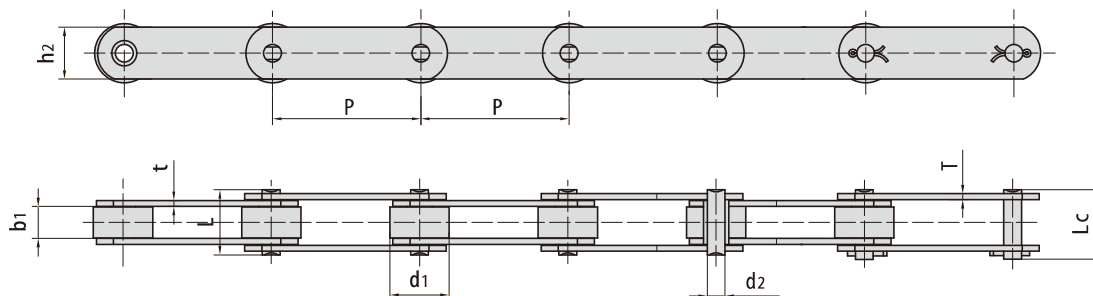


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q _m in kN/bf	Q ₀ kN	q kg/m
	mm	mm	mm	mm	mm	mm	mm	mm			
M 75-P-75	75.0	40.00	22.00	12.00	44.0	47.0	35.0	4.0	75.0/16870	75.0	5.88
M 80F3-P-125	125.0	50.00	28.00	11.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	6.72
*M 80F4-BF1-125	125.0	25.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	4.27
M 80F4-A-100	100.0	25.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	4.63
*M 80F4-B-100	100.0	18.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	4.13
*M 80F4-B-125	125.0	18.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	3.85
M 80F6-P-75	75.0	35.00	14.00	12.00	40.5	45.0	30.0	5.0	80.0/18000	88.0	4.80
M 80F8-S-80	80.0	25.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	5.11
*M 80F8-B-80	80.0	18.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	4.48
*M 80F8-B-100	100.0	18.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	4.14
*M 80F8-B-125	125.0	18.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	3.85
M 80F9-S-80	80.0	25.00	28.00	12.00	54.5	59.0	35.0	5.0	80.0/18000	88.0	5.07
M 80F12-P-100	100.0	50.00	28.00	12.00	55.0	58.5	35.0	5.0	80.0/18000	88.0	7.80
M 80F30-S-100	100.0	25.00	28.00	12.00	55.0	58.5	40.0	5.0	80.0/18000	88.0	7.51
*M 80F31-B-100	100.0	18.00	28.00	12.00	61.0	67.0	35.0	5.0/8.0	80.0/18000	88.0	10.40
M 100-P-80	80.0	47.50	31.40	15.90	71.2	76.0	40.0	8.0	100.0/22727	110.0	12.36
*M 112F61-B-80	80.0	21.00	32.00	15.00	64.5	69.0	40.0	6.0	112.0/25200	123.2	6.50
M 112F2-P-125	125.0	55.00	50.00	16.00	87.1	91.6	40.0	7.2	112.0/25200	123.2	13.35
M 224F3-P-160	160.0	80.00	30.00	21.00	81.0	-	60.0	8.0	224.0/50909	246.0	17.34
*M 112F6-B-100	100.0	21.00									6.14
*M 112F6-B-125	125.0	21.00	32.00	15.00	64.0	68.3	40.0	6.0	112.0/25200	123.2	5.46
M 112F6-P-125	125.0	60.00									10.33
M 112F7-P-125	125.0	30.00	32.00	15.00	64.0	68.3	40.0	6.0	112.0/25200	123.2	6.39
M 112F8-S-100	100.0	30.00	31.00	15.00	63.5	68.0	40.0	6.0	112.0/25200	123.2	7.14
*M 112F14	160.0	21.00	31.00	14.00	64.4	69.0	40.0	6.0	112.0/25200	123.2	5.03
*M 112F15-B-100	100.0	21.00	31.00	15.00	64.5	69.0	40.0	6.0	112.0/25200	123.2	5.90
M 112F18-S-100	100.0	30.00	31.00	15.00	64.0	68.6	36.0	6.0	112.0/25200	123.2	6.20
M 112F33-P-100	100.0	60.00	32.00	15.00	72.5	77.0	40.0	8.0	112.0/25200	123.2	14.10
*M 112F49-B-100	100.0	21.00	32.00	15.00	73.0	77.5	40.0	6.0/10.0	112.0/25200	123.2	8.20
*M 112F18-B-125	125.0	21.00	31.00	15.00	-	68.6	36.0	6.0	112.0/25200	123.2	5.25
*M 112F60-B-125	125.0	21.00	32.00	15.00	64.5	69.0	40.0	6.0	112.0/25200	123.2	5.60

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

M系列输送链

Conveyor chains (M series)

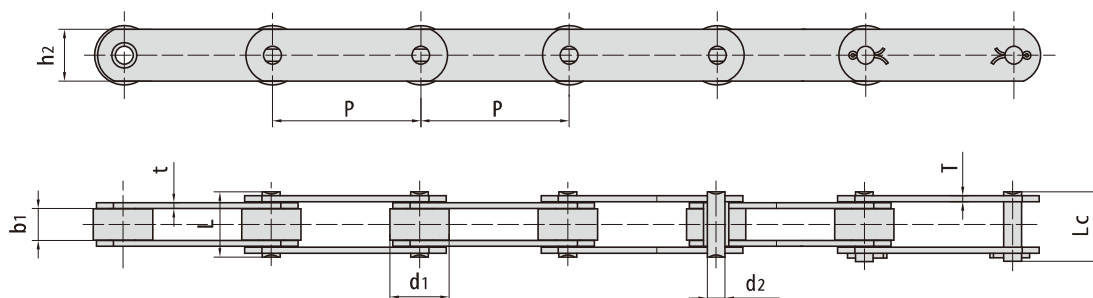


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d_1 max	b_1 min	d_2 max	L max	L_c max	h_2 max	t/T max	Q_{min}	Q_0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 112-S-150	150.0	30.0	32.0	15.0	-	69.0	40.0	6.0	160.0/36364	176.0	6.05
M 112F21-P-160	160.0	40.0	25.0	15.0	57.5	62.0	40.0	6.0	112.0/25200	123.2	6.86
M 112F24-S-100	100.0	30.0	32.0	15.0	-	73.2	36.0	6.0	112.0/25200	123.2	6.82
M 112-PF1-80	80.0	40.0	32.0	15.0	64.5	69.0	40.0	6.0	112.0/25200	123.2	10.97
*M 112F27-B-160	160.0	21.0	31.0	14.0	69.4	74.0	40.0	6.0/8.0	112.0/25200	123.2	5.80
*M 112F47-B-160	160.0	21.0	32.0	15.0	72.5	77.0	40.0	8.0	160.0/36364	176.0	7.00
M 160F1-P-100	100.0	36.0	36.0	18.0	76.0	80.0	40.0	7.0	160.0/36364	176.0	9.42
*M 160F14-B-100	100.0	25.0	37.0	18.0	77.3	83.5	50.0	8.0	160.0/36364	176.0	10.44
*M 160F15-B-100	100.0	25.0	37.0	18.0	85.3	91.5	50.0	10.0	160.0/36364	176.0	12.51
*M 160F41-B-100	100.0	25.0	37.5	18.0	73.3	79.5	50.0	7.0	160.0/36364	176.0	9.34
M 160F23-S-160	160.0	36.0	37.0	18.0	73.3	79.5	50.0	7.0	160.0/36364	176.0	11.95
*M 160F36-B-160	160.0	25.0	37.0	18.0	73.3	79.5	50.0	7.0	160.0/36364	176.0	7.86
M 160F40-P-200	200.0	70.0	37.0	20.0	83.0	89.5	51.0	9.0	180.0/40492	198.0	14.50
*M 224F30-B-125	125.0	30.0	42.0	21.0	-	92.5	56.0	8.0	224.0/50909	246.0	12.49
*M 224F40-B-160	160.0	30.0	43.0	21.0	85.0	91.0	60.0	8.0	224.0/50909	246.0	11.20
*M 224F52-B-160	160.0	30.0	43.0	21.0	93.0	99.0	60.0	10.0	224.0/50909	246.0	16.20
*M 224F31-B-200	200.0	30.0	43.0	21.0	84.0	91.0	60.0	8.0	224.0/50909	246.0	10.05
M 300F6-P-152.4	152.4	88.9	38.5	32.0	84.0	92.0	60.0	10.0/8.0	400.0/89990	500.0	23.10
*M 315F1-B-125	125.0	36.0	37.0	25.0	90.0	-	70.0	10.0	315.0/70862	346.0	19.15
M 315-S-170	170.0	50.0	47.0	25.0	98.9	105.0	70.0	10.0	315.0/70862	346.5	19.83
*M 315F6-B-160	160.0	42.0	80.0	25.0	140.0	140.0	80.0	12.0	315.0/70862	346.5	27.30
M 315F10-S-250	250.0	50.0	55.0	26.0	106.9	113.0	70.0	10.0	315.0/70862	393.7	17.60
M 315F12-S-200	200.0	45.0	48.0	25.0	119.0	126.5	70.0	15.0	600.0/135000	648.0	24.20
M 315F16-S-250	250.0	60.0	48.0	25.0	109.5	117.0	70.0	12.0	600.0/135000	648.0	21.60
*M 315F17-B-160	160.0	36.0	66.7	25.0	93.5	100.5	70.0	8.0	315.0/70862	346.5	15.04
M 315F52-S-250	250.0	60.0	48.0	25.0	108.0	115.0	70.0	12.0	315.0/70862	346.5	21.30
M 450F28-S-200	200.0	60.0	56.0	30.0	131.0	142.0	80.0	15.0	450.0/102272	562.5	36.50
*M 630-B-250	250.0	50.0	65.0	36.0	140.0	150.0	103.0	14.0	630.0/14172	693.0	36.30

*套筒链：表中滚子直径 d_1 为套筒直径

*Bush chain: d_1 in the table indicates the external diameter of the bush.

M系列带附板输送链


Conveyor chains with attachments (M series)

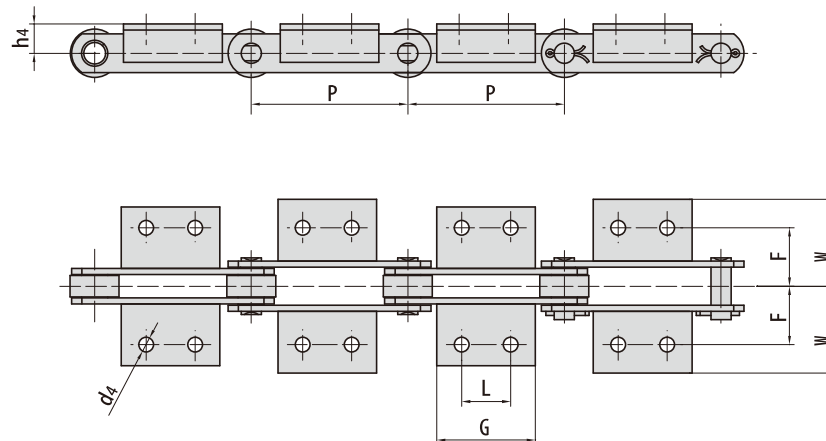

ISO 链号 ISO Chain No.	P	L	G	d4	F	W	h4
	mm	mm	mm	mm	mm	mm	mm
M 20	40.0	△	14.0	6.6	27.0	40.0	16.0
	50.0	△	14.0				
	63.0	20.0	35.0				
	80.0	35.0	50.0				
M 28	50.0	△	20.0	9.0	32.0	47.0	20.0
	63.0	△	20.0				
	80.0	25.0	45.0				
	100.0	40.0	60.0				
M 40	63.0	△	31.0	9.0	35.0	50.0	25.0
	80.0	20.0	45.0				
	100.0	40.0	60.0				
	125.0	65.0	85.0				
M 56	63.0	△	22.0	11.0	44.0	61.0	30.0
	80.0	△	30.0				
	100.0	25.0	50.0				
	125.0	50.0	75.0				
	160.0	85.0	110.0				
M 80	80.0	△	30.0	11.0	48.0	65.0	35.0
	100.0	25.0	50.0				
	125.0	50.0	75.0				
	160.0	85.0	110.0				
	200.0	125.0	150.0				

△附板带一个孔
△Attachments with 1 hole


M系列带附板输送链 Conveyor chains with attachments (M series)

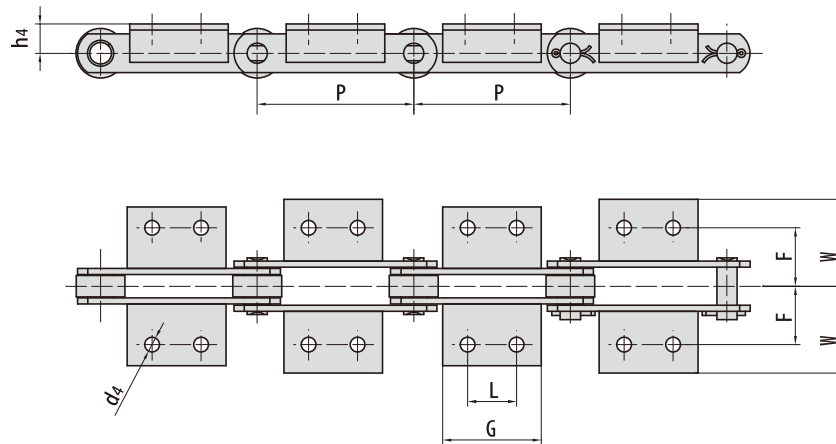

ISO 链号 ISO Chain No.	P	L	G	d4	F	W	h4
	mm	mm	mm	mm	mm	mm	mm
M 112	80.0	△	28.0	14.0	55.0	80.0	40.0
	100.0	△	40.0				
	125.0	35.0	65.0				
	160.0	65.0	95.0				
	200.0	100.0	130.0				
M 160	100.0	△	30.0	14.0	62.0	85.0	45.0
	125.0	25.0	50.0				
	160.0	50.0	80.0				
	200.0	85.0	115.0				
	250.0	145.0	175.0				
M 224	125.0	△	35.0	18.0	70.0	110.0	55.0
	160.0	△	60.0				
	200.0	65.0	100.0				
	250.0	125.0	160.0				
	315.0	190.0	230.0				
M 315	160.0	△	35.0	18.0	80.0	115.0	65.0
	200.0	50.0	85.0				
	250.0	100.0	140.0				
	315.0	155.0	190.0				
	400.0	155.0	205.0				

△附板带一个孔
△Attachments with 1 hole


M系列带附板输送链 Conveyor chains with attachments (M series)

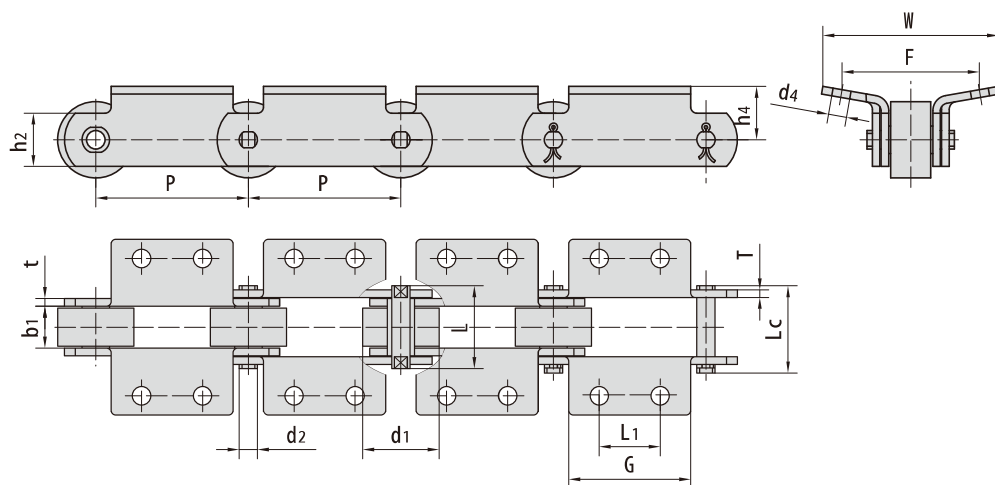

东华链号 Donghua Chain No.	L ₁	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm
M 80K 2F6-P-100	40.00	80.00	90.00	115.00	35.00	12.00
M 112K 2F4-P-200	120.00	180.00	110.00	142.00	46.00	14.00

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q _{min} kN/bf	q kg/m
	mm	mm	mm	mm	mm	mm	mm	mm		
M 80K 2F6-P-100	100.00	50.00	27.00	12.00	55.0	58.5	35.00	5.00	80.0/17994	10.50
M 112K 2F4-P-200	200.00	60.00	38.50	15.00	71.7	75.6	40.00	5.00	160.0/35988	13.50


带K4附件
With K4 attachment

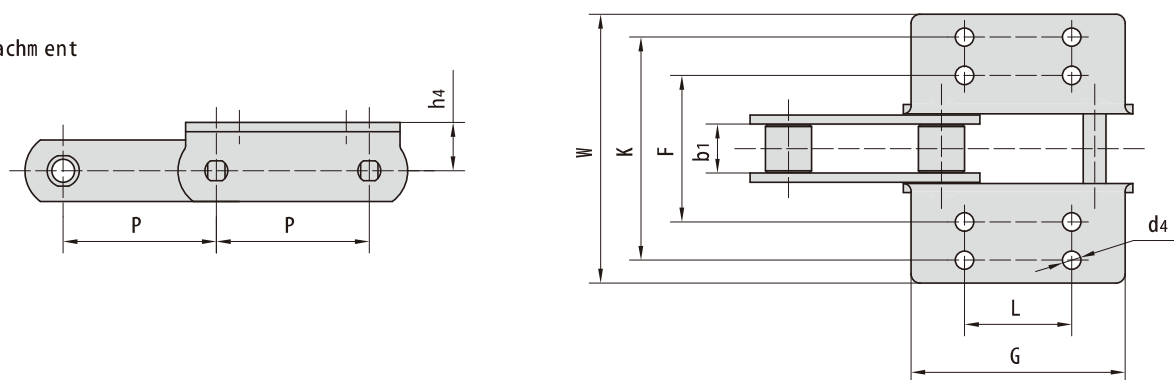

东华链号 Donghua Chain No.	P	b ₁	h ₄	F	K	W	L	G	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 112K 4-S-100	100.00	32.00	31.50	96.00	146.00	176.00	70.00	140.00	12.00

M系列带附板输送链


Conveyor chains with attachments (M series)

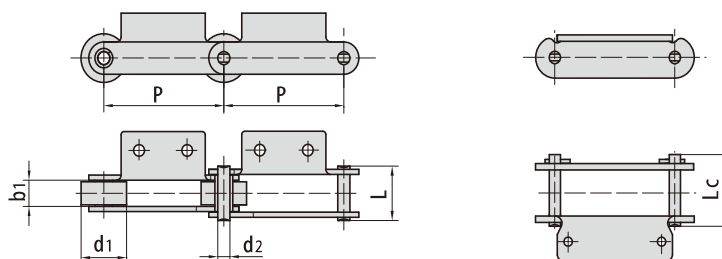

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 18F1A1-P-50	50.0	25.0	11.5	5.72	26.0	28.2	18.0/4050	20.0	2.46
M 18F2A1.02-P-50	50.0	25.0	11.5	5.72	28.0	30.2	18.0/4050	20.0	2.18
M 18F2A1F1.32-P-50	50.0	25.0	11.5	5.70	28.0	30.2	18.0/4050	20.0	1.85
M 18F4A1.02-S-50	50.0	15.0	12.0	6.00	24.0	26.5	18.0/4050	20.0	1.20
M 18F8K1.03-P-50	50.0	25.0	11.5	5.72	26.0	28.2	18.0/4050	20.0	2.47
M 20K1F2.02-S-50	50.0	12.5	16.0	6.00	31.0	33.5	20.0/4545	25.0	3.60
M 20A2F1-S-50	50.0	12.5	16.0	6.00	31.0	33.5	20.0/4545	25.0	1.53
M 28F1A2-P-80	80.0	29.4	18.0	7.00	35.4	38.7	28.0/6300	31.0	2.60
M 28F3A2-P-63	63.0	30.0	17.0	7.00	37.3	40.3	35.0/7874	39.0	3.48
M 28F3A2-F-100	100.0	30.0	17.0	7.00	37.3	40.3	35.0/7874	39.0	3.46
M 32A1.02-P-50	50.0	31.0	15.0	10.00	33.0	35.5	32.0/7200	35.2	4.09
M 32A1F1-P-50	50.0	31.0	15.0	10.00	33.0	35.5	32.0/7200	35.2	3.96
M 32A1F2.02-PF1-50	50.0	36.0	14.8	10.00	32.6	35.5	35.0/7874	39.0	4.40
M 35F4A1.01-C-69	69.0	25.0	12.0	7.00	27.5	30.0	35.0/7874	39.0	2.26
M 40FA1.02-P-50	50.0	31.0	15.0	10.00	36.6	39.0	75.0/16872	82.5	4.52
M 40FK2F1-P-50	50.0	31.0	15.0	10.00	36.6	39.0	40.0/8992	44.0	4.94
M 40FA2-P-50	50.0	31.0	15.0	10.00	36.6	39.0	40.0/8992	44.0	4.54
M 40FA1F1.02-P-50	50.0	31.0	15.0	10.00	36.6	39.0	40.0/8992	44.0	4.31
M 40FA2F1.08-P-50	50.0	31.0	15.0	10.00	36.6	39.0	40.0/8992	44.0	4.08
M 40F17A2-P-50.8	50.8	31.0	15.2	13.40	38.0	42.8	53.9/12127	59.2	4.90
M 40F31A2.02-P-50.8	50.8	31.8	15.0	14.00	37.0	40.5	40.0/8992	44.0	4.60
M 40F17K1.10-P-50.8	50.8	31.0	15.2	13.35	38.0	42.8	53.9/12127	59.2	4.60
M 40F5A2-S-65	65.0	24.0	15.0	12.00	38.0	41.0	40.0/8992	44.0	4.74
M 40F10-F-76.2	76.2	31.5	15.0	14.00	38.0	42.0	40.0/8992	44.0	4.16
M 40A2F2-F-80	80.0	36.0	20.0	8.50	40.5	45.0	40.0/8992	44.0	4.98
M 40F1-P-125	125.0	36.0	38.0	14.27	75.6	-	40.0/8992	44.0	10.18
M 56F1-P-100	100.0	38.0	20.5	10.00	42.3	46.1	56.0/12727	61.0	4.63
M 56F2-P-100	100.0	42.0	22.5	10.00	44.6	48.5	56.0/12727	61.0	5.67
M 56F2-F-100	100.0	42.0	22.5	10.00	44.6	48.5	56.0/12727	61.0	5.88
M 56F3-P-100	100.0	38.0	20.5	10.00	42.3	46.1	56.0/12727	61.0	4.72
M 56F3-F.06-100	100.0	38.0	20.5	10.00	42.3	46.1	56.0/12727	61.0	4.70
M 56F8-P-100	100.0	38.0	17.0	10.00	38.8	42.6	56.0/12727	61.0	3.79
M 56F9-F1-100	100.0	38.0	20.5	10.00	46.3	50.1	88.2/19845	97.0	5.80
M 56F23-F-100	100.0	42.0	24.0	10.00	44.6	49.5	56.0/12727	61.0	5.52
M 56F38A2-P-100	100.0	36.0	15.2	10.00	37.0	40.8	56.0/12727	61.0	3.64
M 56F6A2.02-PF1-100	100.0	38.0	17.0	10.00	38.8	42.6	56.0/12727	61.0	4.10
M 56A2-P-125	125.0	42.0	24.0	10.00	46.0	49.5	56.0/12727	61.0	5.24
M 56F26A2.02-F-125	125.0	42.0	24.0	10.00	46.0	49.5	56.0/12727	61.0	4.82
M 75-P100	100.0	38.0	18.9	9.53	40.4	44.7	75.0/17045	83.0	4.85

M系列带附板输送链

Conveyor chains with attachments (M series)

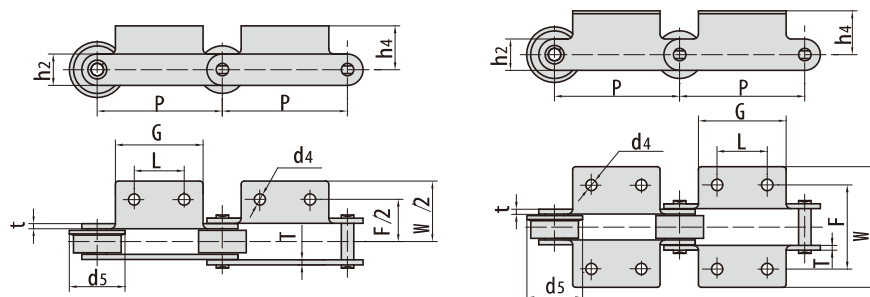


东华链号 Donghua Chain No.	P	L	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 18F1A1-P-50	50.0	△	46.0	44.0	72.0	24.0	18.0	6.5	2.50	-
M 18F2A1.02-P-50	50.0	△	41.0	48.0	68.0	25.0	15.0	6.5	3.00	-
M 18F2A1F1.32-P-50	50.0	△	42.0	44.6	64.6	22.5	15.0	6.0	3.00	-
M 18F4A1.02-S-50	50.0	△	30.0	50.0	83.0	20.0	15.0	8.0	2.03	-
M 18F8K1.03-P-50	50.0	△	46.0	44.0	66.6	24.0	18	8.5	2.50	-
M 20K1F2.02-S-50	50.0	△	20.0	54.0	75.0	16.0	18.0	6.6	2.50	-
M 20A2F1-S-50	50.0	20.0	35.0	52.0	80.0	13.0	18.0	8.1	2.50	-
M 28F1A2-P-80	80.0	25.0	45.8	66.0	91.6	11.8	20.5	8.8	3.25	-
M 28F3A2-P-63	63.0	20.0	50.0	64.0	92.0	20.0	20.0	9.0	4.00	-
M 28F3A2-F-100	100.0	40.0	76.0	64.0	100.0	20.0	20.0	9.0	4.00	40.0
M 32A1.02-P-50	50.0	△	60.0	62.0	97.0	35.0	23.0	10.0	3.00	-
M 32A1F1-P-50	50.0	△	30.0	62.0	92.0	28.0	23.0	10.0	3.00	-
M 32A1F2.02-PF1-50	50.0	△	60.0	62.0	97.0	16.5	23.0	10.0	3.00	-
M 35F4A1.01-C-69	69.0	△	60.0	50.0	74.0	25.5	19.0	7.0	2.50	-
M 40FA1.02-P-50	50.0	△	60.0	70.0	98.0	17.5	25.0	10.0	4.00	-
M 40FK2F1-P-50	50.0	30.0	60.0	67.5	100.0	17.0	25.0	9.0	4.00	-
M 40FA2-P-50	50.0	30.0	45.0	93.0	136.0	14.5	25.0	6.5	4.00	-
M 40FA1F1.02-P-50	50.0	△	35.0	54.0	104.0	20.5	25.0	10.5	4.00	-
M 40FA2F1.08-P-50	50.0	25.0	45.0	90.0	122.0	22.0	25.0	8.5	4.00	-
M 40F17A2-P-50.8	50.8	30.0	55.0	66.0	92.0	18.0	25.0	10.2	5.00/4.00	-
M 40F31A2.02-P-50.8	50.8	19.0	40.0	64.0	100.0	19.0	26.3	8.0	4.00	-
M 40F17K1.10-P-50.8	50.8	△	55.0	66.0	92.0	18.0	25.0	10.2	5.00/4.00	-
M 40F5A2-S-65	65.0	25.0	45.0	90.0	122.0	24.5	30.0	8.5	4.00	-
M 40F10-F-76.2	76.2	22.2	38.3	76.2	106.5	19.0	26.0	9.4	4.00	40.0
M 40A2F2-F-80	80.0	20.0	50.0	70.0	112.0	35.0	25.0	9.0	3.50	45.0
M 40F1-P-125	125.0	50.0	90.0	100.0	140.0	36.0	50.0	13.0	6.00	-
M 56F1-P-100	100.0	40.0	70.0	67.5	96.6	35.0	25.0	9.0	4.00	-
M 56F2-P-100	100.0	29.7	50.0	124.0	148.0	21.5	32.0	7.0	4.00	-
M 56F2-F-100	100.0	29.7	50.0	124.0	148.0	21.5	32.0	7.0	4.00	50.0
M 56F3-P-100	100.0	50.0	70.0	71.0	101.0	35.0	25.0	9.0	4.00	-
M 56F3-F.06-100	100.0	50.0	70.0	71.0	101.0	35.0	25.0	9.0	4.00	44.5
M 56F8-P-100	100.0	△	70.0	63.8	95.0	25.0	25.0	8.2	4.00	-
M 56F9-F1-100	100.0	40.0	70.0	68.0	96.6	25.0	32.0	9.0	5.00	45.0
M 56F23-F-100	100.0	40.0	70.0	71.4	100.6	35.0	25.0	9.0	4.00	50.0
M 56F38A2-P-100	100.0	40.0	60.0	70.0	100.0	20.0	25.0	9.0	4.00	-
M 56F6A2.02-PF1-100	100.0	40.0	70.0	71.5	92.0	55.0	25.0	6.5	4.00	-
M 56A2-P-125	125.0	50.0	75.0	88.0	128.0	30.0	30.0	11.0	4.00	-
M 56F26A2.02-F-125	125.0	50.0	75.0	88.0	128.0	30.0	30.0	9.0	4.00	50.0
M 75-P100	100.0	40.0	70.0	64.0	112.0	24.9	26.0	9.0	4.00	-

△附板带一个孔

△Attachments with 1 hole

M系列带附板输送链

Conveyor chains with attachments (M series)

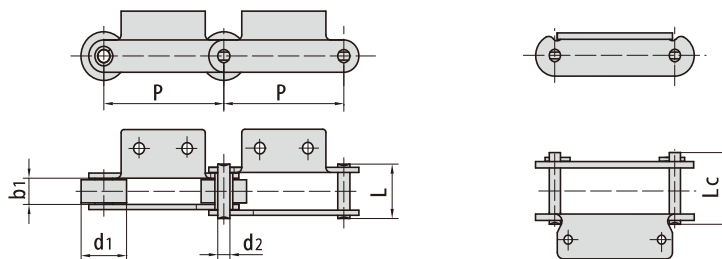


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 75-P100F1	100.0	38.0	18.9	9.53	38.4	42.7	75.0/17045	83.0	4.01
M 75-P100F3	100.0	28.5	23.9	11.10	46.3	50.3	75.0/17045	83.0	4.53
M 75F4-P-100	100.0	38.0	18.9	9.53	40.4	44.7	75.0/17045	83.0	4.62
M 75-PF1-100	100.0	19.1	18.9	9.53	40.4	44.7	75.0/17045	75.0	3.43
M 80K1F1-P-100	100.0	50.0	28.0	12.00	55.0	58.5	80.0/18000	88.0	9.10
*M 80K2F1-B-100	100.0	18.0	28.0	12.00	55.0	58.5	80.0/18000	88.0	5.94
*M 80F5K1-B-100	100.0	18.0	28.0	12.00	55.0	58.5	80.0/18000	88.0	5.45
M 80A2F1-F-160	160.0	50.0	29.0	12.00	65.0	-	80.0/18000	88.0	7.45
M 80F43K2-P-200	200.0	50.0	28.0	12.00	55.0	59.0	80.0/18000	88.0	7.90
M 112F5K2-P-100	100.0	36.0	37.0	16.00	69.0	74.0	112.0/25200	123.2	8.28
M 112A2F18.04-P-100	100.0	60.0	31.0	15.00	64.0	73.0	112.0/25200	123.2	11.80
*M 112K2F2-B-100	100.0	21.0	32.0	15.00	64.5	69.0	112.0/25200	123.2	7.53
M 112F38A2.04-P-100	100.0	60.0	32.0	15.00	64.5	69.0	112.0/25200	123.2	12.74
M 112F16K1-P-125	125.0	60.0	32.0	15.00	68.5	73.0	112.0/25200	123.2	13.00
M 112K2F1-S-125	125.0	30.0	32.0	16.00	64.5	69.0	112.0/25200	123.2	7.35
M 112F9A2-F-180	180.0	50.0	32.0	15.00	64.5	69.0	160.0/35993	176.0	10.30
M 112F3-F-200	200.0	60.0	37.0	16.00	69.0	74.0	112.0/25200	123.2	11.00
M 112A2F21-F-315	315.0	60.0	32.0	15.00	65.0	70.0	112.0/25200	123.2	8.50
M 160F1K2-P-100	100.0	36.0	36.0	18.00	76.0	80.0	160.0/35993	176.0	10.80
*M 160F1K2.03-B-100	100.0	18.0	36.0	18.00	76.0	80.0	160.0/35993	176.0	9.73
M 160F12K2-S-100	100.0	36.0	38.0	14.00	76.0	-	100.0/22496	110.0	9.33
*M 160F2-B-100	100.0	25.0	37.0	18.00	73.3	83.0	222.0/49940	244.2	11.36
M 160F25K2.04-B-100	100.0	25.0	37.0	18.00	73.3	79.5	160.0/36364	176.0	10.83
*M 160F41K2-B-100	100.0	36.0	37.0	18.00	73.3	79.5	160.0/35993	176.0	14.75
*M 160F55K2-B-100	100.0	25.0	37.0	18.00	-	86.0	160.0/35993	176.0	15.04
M 160F3K1F1-P-101.6	101.6	66.7	26.0	26.90	58.0	78.5	156.0/35093	171.6	17.37
M 160A2F1.02-P-152.4	152.4	66.7	25.4	26.90	58.0	68.0	160.0/35993	176.0	12.55
M 160A2F7-F-200	200.0	70.0	37.0	18.00	85.0	-	181.8/40905	200.0	15.20
M 160A2F8-F-200	200.0	70.0	37.0	18.00	85.0	-	181.8/40905	200.0	15.23
M 160K2F2-S-200	200.0	36.0	36.0	18.00	76.0	80.0	160.0/36364	176.0	11.40
M 160A2F8-F-200	200.0	70.0	37.0	18.00	85.0	-	181.8/40905	200.0	15.20
M 224F6A2-P-160	160.0	85.0	42.0	21.00	87.5	92.5	224.0/50909	246.5	27.56
M 224F29A2-F-200	200.0	85.0	43.0	21.00	85.0	91.0	224.0/50909	246.0	21.60
M 224F1K2-P-200	200.0	85.0	42.0	21.00	95.0	-	224.0/50909	246.0	21.20
M 224F42K2-S-200	200.0	42.0	44.0	21.00	-	99.0	224.0/50909	246.0	17.20
M 315F22A2-F-400	400.0	100.0	56.0	25.00	109.8	115.3	315.0/70815	346.5	26.60
M 315K2F1-P-250	250.0	50.0	47.0	25.00	98.9	105.0	315.0/70815	346.5	20.60
M 450F26A2-F-400	400.0	100.0	56.0	30.00	111.0	118.0	315.0/70815	346.5	27.60

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

M系列带附板输送链

Conveyor chains with attachments (M series)

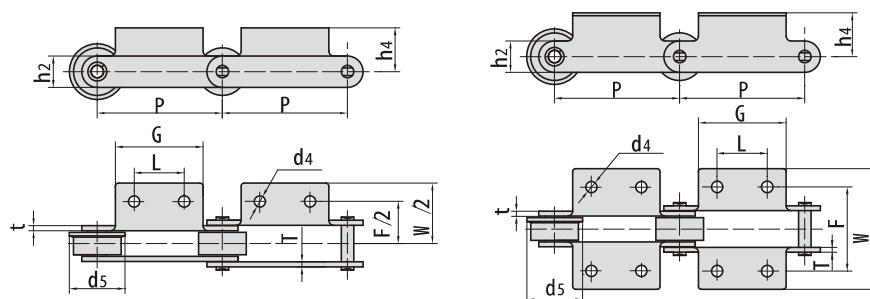


东华链号 Donghua Chain No.	P	L	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 75-P 100F1	100.0	40.0	70.0	64.0	112.0	24.4	26.0	9.0	3.50	-
M 75-P 100F3	100.0	50.0	70.0	75.7	96.7	35.0	26.0	9.7	4.00	-
M 75F4-P-100	100.0	40.0	70.0	90.0	112.4	24.9	26.0	8.5	4.00	-
M 75-P F1-100	100.0	40.0	70.0	64.0	112.0	24.9	26.0	9.0	4.00	-
M 80K 1F1-P-100	100.0	△	30.0	96.0	138.0	35.0	35.0	11.0	5.00	-
M 80K 2F1-B-100	100.0	70.0	100.0	96.0	130.0	35.0	35.0	11.0	5.00	-
M 80F5K 1-B-100	100.0	△	60.0	100.0	156.0	23.2	35.0	13.0×17.0	5.00	-
M 80A 2F1-F-160	160.0	60.0	95.0	94.0	124.0	27.5	35.0	9.0	5.00	60.0
M 80F43K 2-P-200	200.0	80.0	120.0	96.0	130.0	35.0	35.0	11.0	5.00	-
M 112F5K 2-P-100	100.0	35.0	65.0	98.5	140.0	40.0	40.0	14.0	6.00	-
M 112A 2F18.04-P-100	100.0	30.0	60.0	100.0	130.0	33.0	36.0	9.0	6.00	-
M 112K 2F2-B-100	100.0	30.0	60.0	100.0	130.0	30.0	40.0	9.0	6.00	-
M 112F38A 2.04-P-100	100.0	35.0	70.0	110.0	160.0	40.0	40.0	14.0	6.00	-
M 112F16K 1-P-125	125.0	△	72.0	120.0	184.0	39.0	40.0	13.0	7.00	-
M 112K 2F1-S-125	125.0	80.0	110.0	85.8	115.8	35.0	40.0	13.0	6.00	-
M 112F9A 2-F-180	180.0	100.0	130.0	110.0	160.0	40.0	40.0	14.0	6.00	60.0
M 112F3-F-200	200.0	90.0	120.0	102.0	137.5	40.0	45.0	11.0	6.00	75.0
M 112A 2F21-F-315	315.0	160.0	200.0	110.0	160.0	40.0	40.0	14.0	6.00	70.0
M 160F1K 2-P-100	100.0	40.0	80.0	124.0	183.0	35.0	40.0	14.0	7.00	-
M 160F1K 2.03-B-100	100.0	40.0	80.0	124.0	283.0	35.0	40.0	14.0	7.00	-
M 160F12K 2-S-100	100.0	30.0	70.0	100.0	120.0	35.0	40.0	13.0	5.60	-
M 160F2-B-100	100.0	△	110.0	125.0	155.0	45.0	50.0	17.0	7.00	-
M 160F25K 2.04-B-100	100.0	40.0	80.0	124.0	180.0	45.0	50.0	14.0	7.00	-
M 160F41K 2-B-100	100.0	40.0	80.0	124.0	180.0	45.0	55.0	14.0	7.00	-
M 160F55K 2-B-100	100.0	40.0	80.0	124.0	200.0	43.0	50.0	14.0	8.00	-
M 160F3K 1F1-P-101.6	101.6	△	56.0	175.0	204.0	38.0	51.0	11.0	7.1/5.1	-
M 160A 2F1.02-P-152.4	152.4	38.0	64.0	120.0	154.0	30.0	50.0	10.5	7.1/5.1	-
M 160A 2F7-F-200	200.0	85.0	115.0	124.0	170.0	45.0	51.0	14.0	7.00	85.0
M 160A 2F8-F-200	200.0	80.0	115.0	124.0	170.0	45.0	51.0	12.0	7.00	85.0
M 160K 2F2-S-200	200.0	100.0	180.0	103.0	133.0	45.0	51.0	9.0	7.00	-
M 160A 2F8-F-200	200.0	80.0	115.0	124.0	170.0	45.0	51.0	12.0	7.00	85.0
M 224F6A 2-P-160	160.0	80.0	125.0	136.0	182.0	62.0	72.0	17.0	8.00	-
M 224F29A 2-F-200	200.0	50.0	100.0	170.0	200.0	45.0	60.0	13.0	8.00	100.0
M 224F1K 2-P-200	200.0	80.0	120.0	128.0	168.0	40.0	50.0	14.0	9.00	-
M 224F42K 2-S-200	200.0	60.0	100.0	142.0	180.0	54.0	62.0	15.0	8.00	-
M 315F22A 2-F-400	400.0	200.0	250.0	160.0	207.6	70.0	70.0	18.0	10.00	120.0
M 315K 2F1-P-250	250.0	60.0	100.0	127.0	168.0	57.0	82.0	14.0	10.00	-
M 450F26A 2-F-400	400.0	200.0	250.0	160.0	207.6	70.0	75.0	18.0	10.00	119.0


△附板带一个孔

△Attachments with 1 hole

M系列带附板输送链 Conveyor chains with attachments (M series)

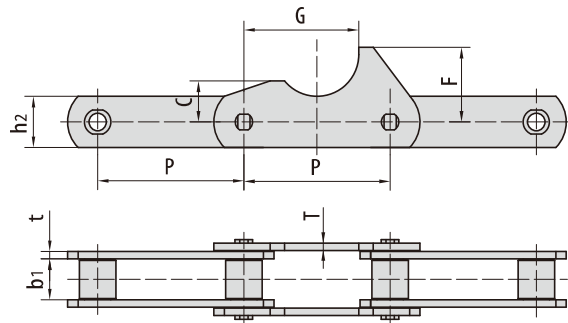


东华链号 Donghua Chain No.	P	b ₁	h ₂	t/T	C	F	G
	mm	mm	mm	mm	mm	mm	mm
M 80F29-S-100	100.00	28.00	35.00	5.00	28.00	51.00	78.50

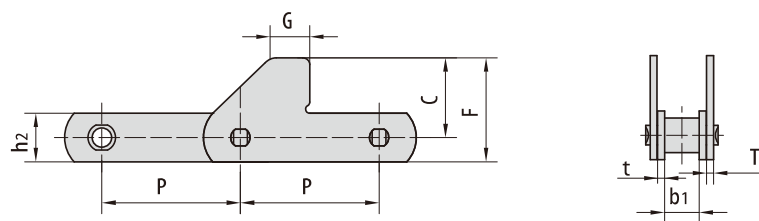


东华链号 Donghua Chain No.	P	b ₁	h ₂	t/T	C	F	G
	mm	mm	mm	mm	mm	mm	mm
M 80F41-P-100	100.00	28.00	35.00	5.00	40.00	75.00	29.00

带SD附件
With SD attachment

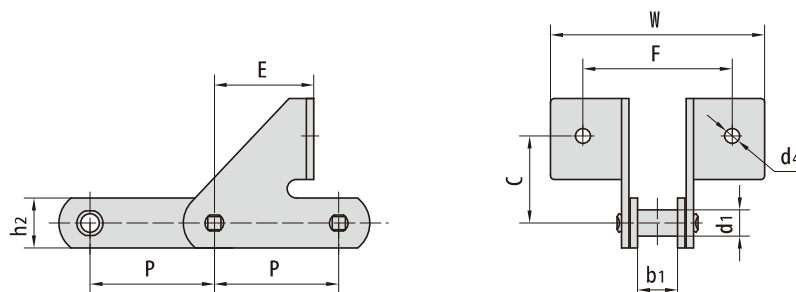


东华链号 Donghua Chain No.	P	d ₁	b ₁	h ₂	C	E	F	W	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 112F52SD-B-100	100.00	21.00	32.00	40.00	70.00	80.00	120.00	172.00	12.00

M系列带附板输送链 Conveyor chains with attachments (M series)

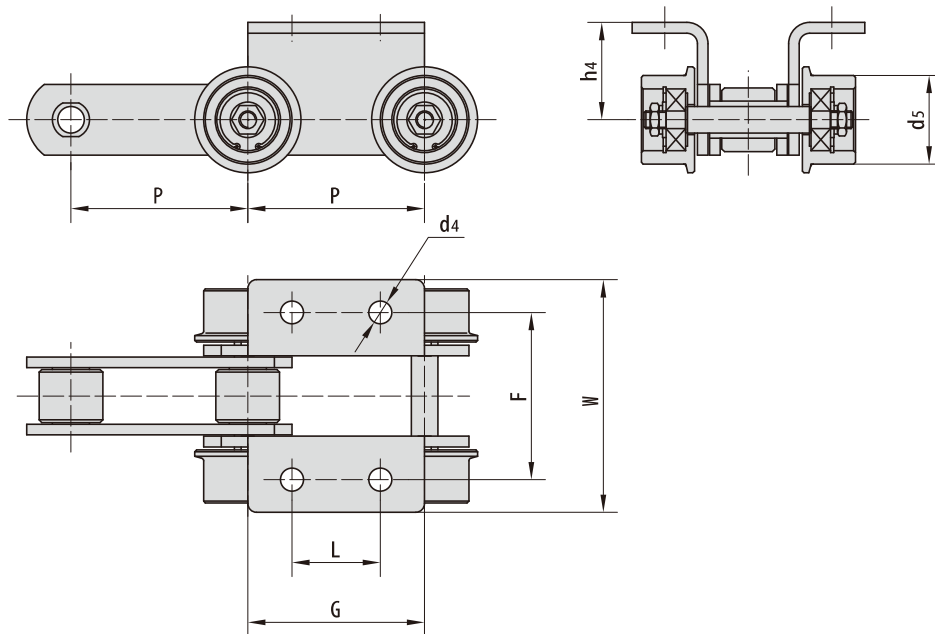


东华链号 Donghua Chain No.	P	L	G	F	W	h4	d4	d5
	mm	mm	mm	mm	mm	mm	mm	mm
M 112F34-P-100	100.00	50.00	100.00	95.00	130.00	55.00	13.00	50.00

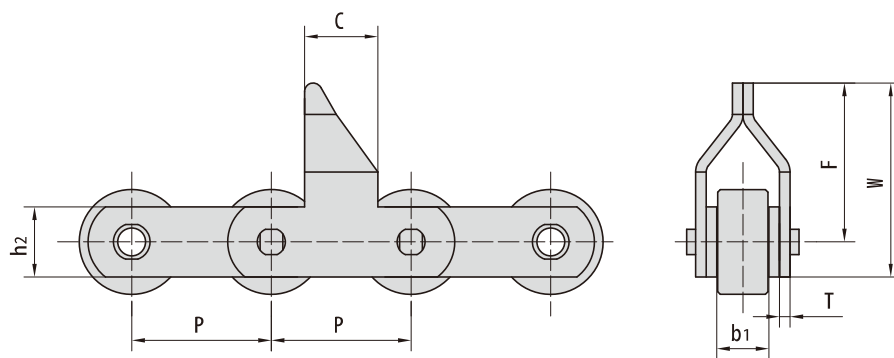

东华链号 Donghua Chain No.	P	b1	h2	T	C	F	W
	mm	mm	mm	mm	mm	mm	mm
M 112F39-P-80	80.00	32.00	40.00	6.00	42.00	91.00	111.00

M系列带加长销输送链


Conveyor chains with extended pins (M series)

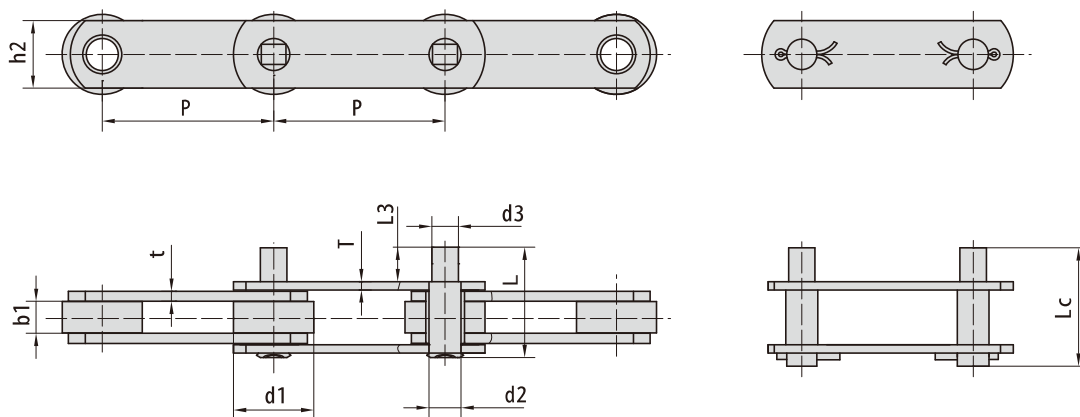

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	加长销尺寸 Extended pin dimension		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness
	P	d _{1 max}	b _{1 min}	d _{2 max}	d _{3 max}	L ₃	L _{max}	L _{c max}	h _{2 max}	t/T _{max}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 18F7-D 3-P-75	75.00	25.00	11.50	5.72	12.00	30.0	56.6	58.9	20.0	3.0
M 20D 1F1.02-P-80	80.00	25.00	16.00	6.00	6.00	25.5	54.7	57.2	18.0	2.5
M 75-D 3-P-100	100.00	38.00	18.95	9.53	11.00	38.0	76.2	80.5	26.0	4.0
M 20-D 1F2.02-P-80	80.00	25.00	16.00	6.00	6.00	27.8	57.0	59.5	18.0	2.5
M 35F1-P-35	35.00	20.00	16.00	7.00	10.00	30.0	59.0	61.9	18.0	2.5
M 35F7-D 1-P-35	35.00	20.00	16.00	8.00	10.00	25.0	56.0	-	18.0	3.0
M 100F11-P-101.6-D 3	101.60	47.50	19.00	19.00	15.70	20.0	66.3	71.5	40.0	6.0/5.0
M 100-P-152.4-D 3	152.40	47.50	19.00	19.00	18.25	84.8	127.5	132.7	40.0	5.0/4.0
M 100-P-203.2-D 3	203.20	47.50	19.00	19.00	18.25	84.8	127.5	132.7	40.0	5.0/4.0
M 160F58-D 1.04-P-125	125.00	70.00	34.00	18.00	18.00	71.6	104.0	-	52.0	8.0

东华链号 Donghua Chain No.	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	Q _{min}	Q _{0 min}	q
	kN/bf	kN	kg/m
M 18F7-D 3-P-75	18.0/4050	20.00	2.14
M 20D 1F1.02-P-80	20.0/4545	25.00	1.65
M 75-D 3-P-100	75.0/16870	82.50	3.61
M 20-D 1F2.02-P-80	20.0/4545	22.00	1.65
M 35F1-P-35	35.0/7874	39.00	2.47
M 35F7-D 1-P-35	35.0/7874	39.00	2.77
M 100F11-P-101.6-D 3	150.0/33722	165.00	7.60
M 100-P-152.4-D 3	100.0/22496	110.00	6.36
M 100-P-203.2-D 3	100.0/22496	110.00	5.49
M 160F58-D 1.04-P-125	160.0/36364	176.00	17.70

MT系列输送链 Conveyor chains (MT series)

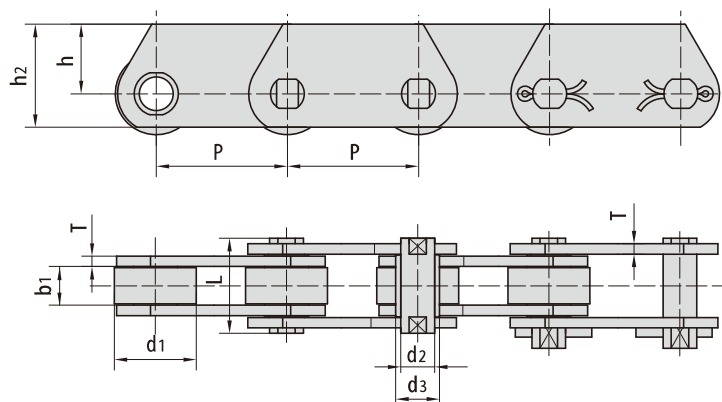


D N 链号 D N Chain No.	节距 Pitch					滚子直径 Roller diameter	销轴直径 Pin diameter	套筒直径 Bush diameter	链板厚度 Plate thickness
	P					d1 max	d2 max	d3 max	T max
	mm					mm	mm	mm	mm
MT20	40.0	50.0	63.0	80.0	100.0	25.0	6.0	9.0	2.5
MT28	50.0	63.0	80.0	100.0	125.0	30.0	7.0	10.0	3.0
MT40	63.0	80.0	100.0	125.0	160.0	36.0	8.5	12.5	3.5
MT56	63.0	80.0	100.0	125.0	160.0	42.0	10.0	15.0	4.0
MT80	80.0	100.0	125.0	160.0	200.0	50.0	12.0	18.0	5.0
MT112	80.0	100.0	125.0	160.0	200.0	60.0	15.0	21.0	6.0
MT160	100.0	125.0	160.0	200.0	250.0	70.0	18.0	25.0	7.0
MT224	125.0	160.0	200.0	250.0	315.0	85.0	21.0	30.0	8.0
MT315	160.0	200.0	250.0	315.0	400.0	100.0	25.0	36.0	10.0
MT450	200.0	250.0	315.0	400.0	500.0	120.0	30.0	42.0	12.0

D N 链号 D N Chain No.	内节内宽 Width between inner plates	销轴长度 Pin length	链板高度 Plate depth		抗拉强度 Tensile strength	
	b1	L	h2	h	Q	*Q
	min mm	max mm	max mm	max mm	min kN/bf	min kN/bf
MT20	16.0	35.0	25.0	16.0	20.0/4545	32.0/7270
MT28	18.0	40.0	30.0	20.0	28.0/6364	42.0/9545
MT40	20.0	45.0	35.0	22.5	40.0/9091	60.0/13635
MT56	24.0	52.0	45.0	30.0	56.0/12727	85.0/19318
MT80	28.0	62.0	50.0	32.5	80.0/18182	125.0/28408
MT112	32.0	73.0	60.0	40.0	112.0/25454	175.0/39768
MT160	37.0	85.0	70.0	45.0	160.0/36364	260.0/59090
MT224	43.0	98.0	90.0	60.0	224.0/50909	340.0/77272
MT315	48.0	112.0	100.0	65.0	315.0/71591	520.0/118180
MT450	56.0	135.0	120.0	80.0	450.0/102272	700.0/159089


*Q 表示热处理后的抗拉强度

*Q denotes the tensile strength after hardened


MC系列空心销轴输送链 Hollow pin conveyor chains (MC series)

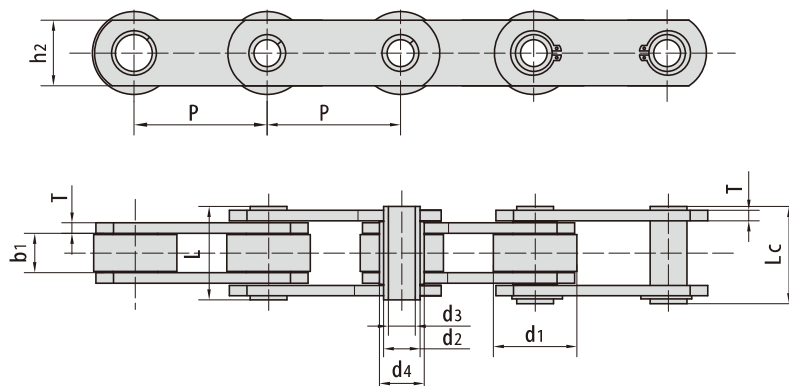


无滚子
without rollers




带S型小滚子
with S small rollers type



带P型大滚子
with P large rollers type



带F型带肩滚子
with F flanged rollers type




D N 链号 D N Chain No.	节距 Pitch						滚子尺寸 Roller dimension				套筒直径 Bush diameter	链板高度 Plate depth
	P						d1 max	d7 max	d5 max	b11	d4 max	h2 max
	mm						mm	mm	mm	mm	mm	mm
MC 28	63.0	80.0	100.0	125.0	160.0	-	36.0	25.0	45.0	4.5	17.5	25.0
MC 56	80.0	100.0	125.0	160.0	200.0	250.0	50.0	30.0	60.0	5.0	21.0	35.0
MC 112	100.0	125.0	160.0	200.0	250.0	315.0	70.0	42.0	85.0	7.0	29.0	50.0
MC 224	160.0	200.0	250.0	315.0	400.0	500.0	100.0	60.0	120.0	10.0	41.0	70.0

D N 链号 D N Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	
	b1 min	d2 max	d3 min	L max	Lc max	T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/bf	kN/bf
MC 28	20.0	13.0	8.2	36.0	38.5	3.5	28.0/6364	40.0/9091
MC 56	24.0	15.5	10.2	45.0	47.5	4.0	56.0/12727	90.0/20454
MC 112	32.0	22.0	14.3	62.5	64.3	6.0	112.0/25454	180.0/40908
MC 224	43.0	31.0	20.3	83.0	85.5	8.0	224.0/50909	350.0/79544

*Q 表示热处理后的抗拉强度

*Q denotes the tensile strength after hardened

FV系列输送链 Conveyor chains (FV series)

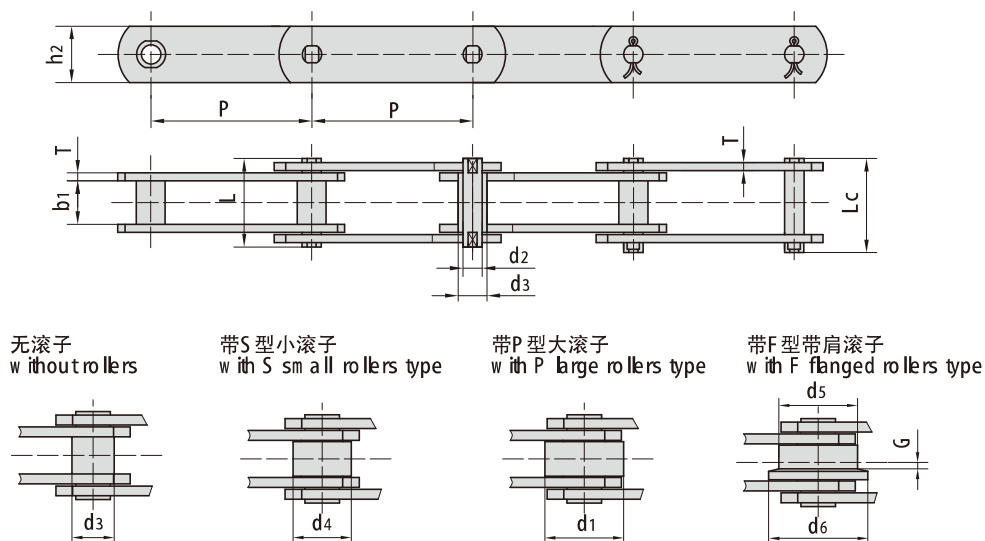

D N 链号 D N Chain No.	节距 Pitch							滚子尺寸 Roller dimension					套筒直径 Bush diameter
	P							d1 max	d4 max	d5 max	d6 max	G	d3 max
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
FV40	50.0	63.0	80.0	100.0	125.0	-	-	32.0	20.0	40.0	50.0	4.0	15.0
FV63	50.0	63.0	80.0	100.0	125.0	160.0	-	40.0	26.0	50.0	63.0	5.0	18.0
FV90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	48.0	30.0	63.0	78.0	6.5	20.0
FV112	80.0	100.0	125.0	160.0	200.0	250.0	-	55.0	32.0	72.0	90.0	7.5	22.0
FV140	63.0	100.0	125.0	160.0	200.0	250.0	-	60.0	36.0	80.0	100.0	9.0	26.0
FV180	100.0	125.0	160.0	200.0	250.0	315.0	-	70.0	42.0	100.0	125.0	13.0	30.0
FV250	125.0	160.0	200.0	250.0	315.0	400.0	-	80.0	50.0	125.0	155.0	15.0	36.0
FV315	160.0	200.0	250.0	315.0	400.0	-	-	90.0	60.0	140.0	175.0	18.0	42.0


D N 链号 D N Chain No.	内节内宽 Width between inner plates	销轴直径 pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	
	b1 min	d2 max	L min	Lc max	h2 max	T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/bf	kN/bf
FV40	18.0	10.0	36.0	39.0	25.0	3.0	40.0/9091	47.0/10681
FV63	22.0	12.0	45.0	48.5	30.0	4.0	63.0/14317	75.0/17045
FV90	25.0	14.0	53.0	56.5	35.0	5.0	90.0/20453	115.0/26136
FV112	30.0	16.0	62.0	66.0	40.0	6.0	112.0/25452	170.0/38636
FV140	35.0	18.0	67.0	71.5	45.0	6.0	140.0/31815	180.0/40908
FV180	45.0	20.0	86.0	92.0	50.0	8.0	180.0/40908	250.0/56817
FV250	55.0	26.0	97.0	103.5	60.0	8.0	250.0/56817	300.0/68181
FV315	65.0	30.0	113.0	126.5	70.0	10.0	315.0/71591	480.0/109089

*Q 表示热处理后的抗拉强度


*Q denotes the tensile strength after hardened

FV系列输送链


Conveyor chains (FV series)

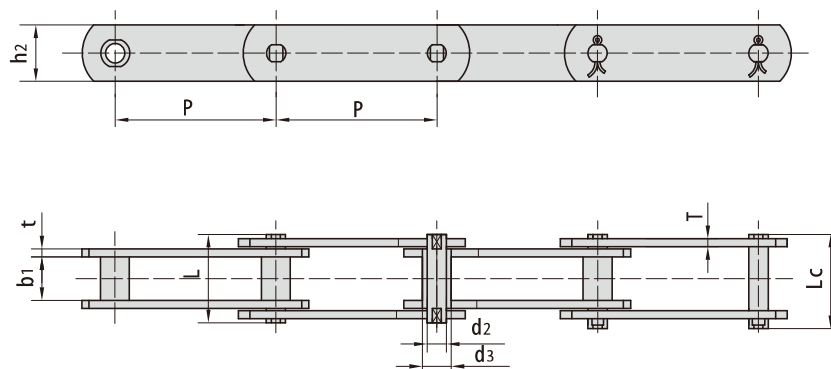


无滚子
without rollers




带S型小滚子
with S small rollers type



带P型大滚子
with P large rollers type




带F型带肩滚子
with F flanged rollers type



东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter						销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	d3 max	d4 max	d5 max	d6 max	G	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
FV40F3-P-63	63.0	32.0	-	-	-	-	-	10.0	38.1	41.5	45.0	4.0	80.0/17985	2.13
FV63F11-P-100	100.0	40.0	-	-	-	-	-	14.0	37.0	-	30.0	4.0	60.0/13488	3.89
FV63F12-P-125	125.0	40.0	-	-	-	-	-	10.0	44.5	48.0	30.0	4.0	63.0/14162	3.84
FV90-B-50	50.0	-	20.0	-	-	-	-	14.0	52.0	56.4	35.0	5.0	90.0/20453	6.10
FV90F9-B-100	100.0	-	20.0	-	-	-	-	14.0	60.2	64.6	35.0	6.0/8.0	90.0/20453	6.00
FV90F10-B-100	100.0	-	20.0	-	-	-	-	14.0	60.2	64.6	40.0	6.0/8.0	90.0/20453	6.83
FV112-S-63	63.0	-	-	32.0	-	-	-	16.0	63.0	67.5	40.0	6.0	112.0/25454	8.80
FV140-B-80	80.0	-	26.0	-	-	-	-	18.0	67.0	72.5	45.0	6.0	140.0/31473	8.55
FV140-PF1-125	125.0	65.0	-	-	-	-	-	18.0	67.0	71.5	45.0	6.0	140.0/31473	12.76
FV140F27-F-125	125.0	-	-	-	80.0	93.5	9.5	18.0	68.4	73.0	45.0	6.4	140.0/31473	17.00
FV180-B-150	150.0	-	30.0	-	-	-	-	20.0	85.5	92.0	50.0	8.0	180.0/40492	8.24

FV系列带附板输送链

Conveyor chains with attachments (FV series)

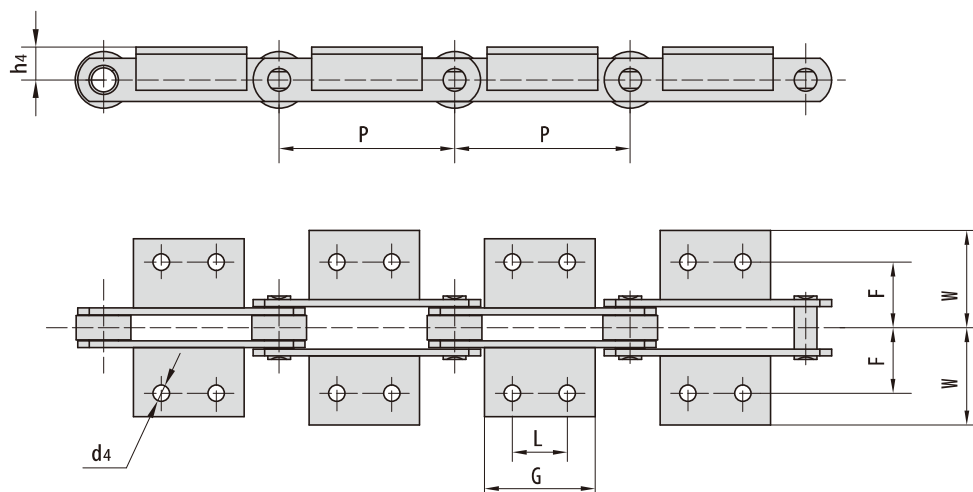


DIN 链号 DIN Chain No.	P	L	G	d4	F	W	h4
	mm	mm	mm	mm	mm	mm	mm
FV40	50.0	△	45.0	6.5	25.0	40.5	20.0
	63.0	△	31.0				
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	30.0	60.0				
FV63	63.0	△	40.0	8.4	34.0	50.0	30.0
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	40.0	60.0				
	160.0	50.0	70.0				
FV90	63.0	△	30.0	8.4	40.0	64.0	35.0
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	40.0	60.0				
	160.0	50.0	70.0				
	200.0	60.0	80.0				
	250.0	65.0	85.0				
FV112	100.0	30.0	50.0	11.0	50.0	70.0	40.0
	125.0	40.0	65.0				
	160.0	50.0	75.0				
	200.0	65.0	90.0				
	250.0	80.0	105.0				

△附板带一个孔
△Attachments with 1 hole

FV系列带附板输送链

Conveyor chains with attachments (FV series)

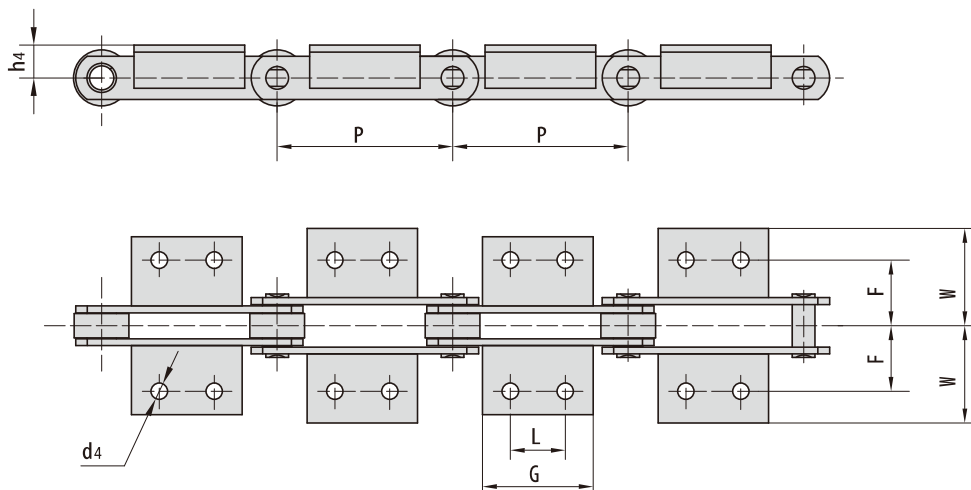


D N 链号 D N Chain No.	P	L	G	d4	F	W	h4
	mm	mm	mm	mm	mm	mm	mm
FV 140	100.0	30.0	55.0	11.0	50.0	81.0	45.0
	125.0	40.0	65.0				
	160.0	50.0	75.0				
	200.0	65.0	90.0				
	250.0	80.0	105.0				
FV 180	125.0	35.0	63.0	13.0	64.0	91.0	45.0
	160.0	50.0	80.0				
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
FV 250	160.0	50.0	80.0	14.0	69.0	106.0	55.0
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
	400.0	100.0	130.0				
FV 315	160.0	△	50.0	14.0	85.0	130.0	60.0
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
	400.0	100.0	130.0				


△附板带一个孔
△Attachments with 1 hole

FV系列带附板输送链

Conveyor chains with attachments (FV series)

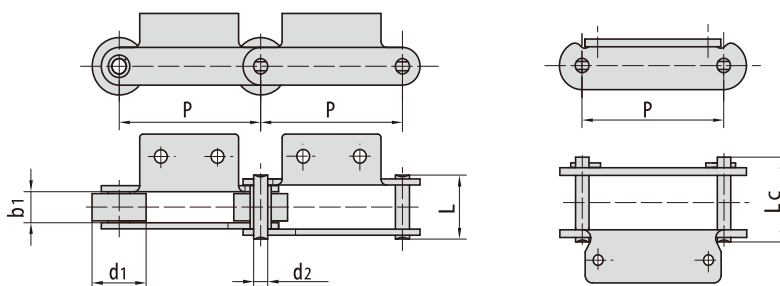

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _m bf	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
FV40A2.02-P-40	40.00	32.00	18.00	10.00	36.0	40.0	40.0/8992	44.0	4.98
FV63A2F4-S-100	100.00	26.00	22.00	12.00	46.0	50.0	63.0/14172	69.3	3.95
FV90A2F1-P-85	85.00	50.00	25.00	14.00	52.0	56.5	90.0/20250	100.0	10.15
FV90A2F1-P-100	100.00	50.00	25.00	14.00	52.0	56.5	90.0/20250	100.0	8.74
FV112F1A1-P-100	100.00	55.00	30.00	16.00	71.0	76.5	180.0/40492	200.0	14.30
FV112F1A1-P-80	80.00	55.00	30.00	16.00	71.0	76.5	180.0/40492	200.0	16.60
FV112F1A2-P-125	125.00	55.00	30.00	16.00	63.0	67.5	112.0/25454	123.2	10.0
FV180F21A2-P-160	160.00	80.00	45.00	20.00	-	90.0	180.0/40492	200.0	20.4
FV250K2F8-P-250	250.00	80.00	55.00	26.00	-	107.5	250.0/56817	275.0	22.6

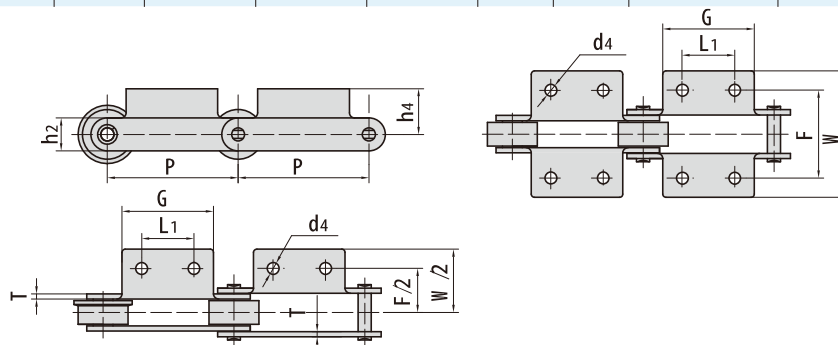


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm
FV40A2.02-P-40	40.00	17.00	30.00	60.0	90.0	20.0	25.0	6.4	3.00
FV63A2F4-S-100	100.00	30.00	50.00	86.0	106.0	20.0	30.0	10.0	4.00
FV90A2F1-P-85	85.00	40.00	60.00	80.0	109.2	40.0	35.0	9.5	5.00
FV90A2F1-P-100	100.00	40.00	60.00	80.0	109.2	40.0	35.0	9.5	5.00
FV112F1A1-P-100	100.00	△	50.00	120.0	164.0	50.0	40.0	15.0	8.00
FV112F1A1-P-80	80.00	△	50.00	120.0	164.0	50.0	40.0	15.0	8.00
FV112F1A2-P-125	125.00	40.00	65.00	100.0	130.0	40.0	40.0	11.0	6.00
FV180F21A2-P-160	160.00	50.00	80.00	140.0	180.0	40.0	50.0	14.0	8.00
FV250K2F8-P-250	250.00	80.00	120.00	140.0	191.0	50.0	60.0	14.0	8.00

△附板带一个孔
△Attachments with 1 hole

FVT系列输送链

Conveyor chains (FVT series)

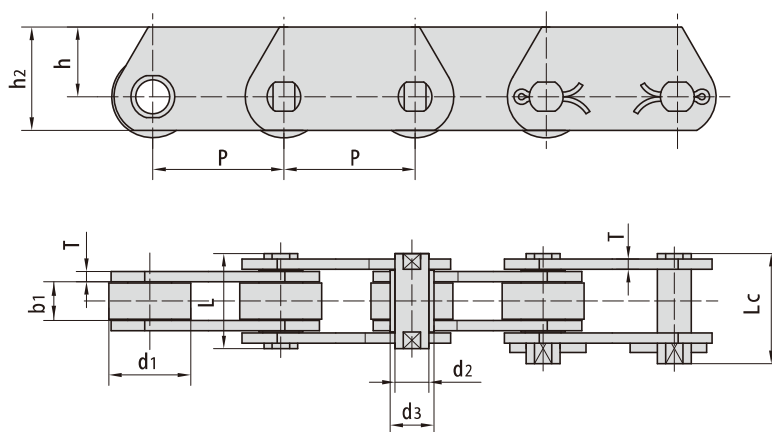

DIN 链号 DIN Chain No.	节距 Pitch							滚子直径 Roller diameter	销轴直径 Pin diameter	套筒直径 Bush diameter	链板厚度 Plate thickness
	P							d1	d2	d3	T
	mm							max mm	max mm	max mm	max mm
FVT40	40.0	50.0	63.0	80.0	100.0	125.0	-	32.0	10.0	15.0	3.0
FVT63	63.0	80.0	100.0	125.0	160.0	-	-	40.0	12.0	18.0	4.0
FVT90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	48.0	14.0	20.0	5.0
FVT112	100.0	125.0	160.0	200.0	250.0	-	-	55.0	16.0	22.0	6.0
FVT140	100.0	125.0	160.0	200.0	250.0	-	-	60.0	18.0	25.0	6.0
FVT180	125.0	160.0	200.0	250.0	315.0	-	-	70.0	20.0	30.0	8.0
FVT250	160.0	200.0	250.0	315.0	-	-	-	80.0	26.0	36.0	8.0
FVT315	160.0	200.0	250.0	315.0	400.0	-	-	90.0	30.0	42.0	10.0


DIN 链号 DIN Chain No.	内节内宽 Width between inner plates	销轴长度 Pin length		链板高度 Plate depth		抗拉强度 Tensile strength	
	b1	L	Lc	h2	h	Q	*Q
	min mm	max mm	max mm	max mm	max mm	min kN/bf	min kN/bf
FVT40	18.0	36.0	39.0	35.0	22.5	40.0/9091	47.0/10681
FVT63	22.0	45.0	48.5	40.0	25.0	63.0/14317	75.0/17045
FVT90	25.0	53.0	56.5	45.0	27.5	90.0/20453	115.0/26136
FVT112	30.0	62.0	66.0	50.0	30.0	112.0/25452	170.0/38636
FVT140	35.0	67.0	71.5	60.0	37.5	140.0/31815	180.0/40908
FVT180	45.0	86.0	92.0	70.0	45.0	180.0/40908	250.0/56817
FVT250	55.0	97.0	103.5	80.0	50.0	250.0/56817	300.0/68181
FVT315	65.0	113.0	126.5	90.0	55.0	315.0/71591	480.0/109089

*Q 表示热处理后的抗拉强度


*Q denotes the tensile strength after hardened

FVC系列空心销轴输送链


Hollow pin conveyor chains (FVC series)

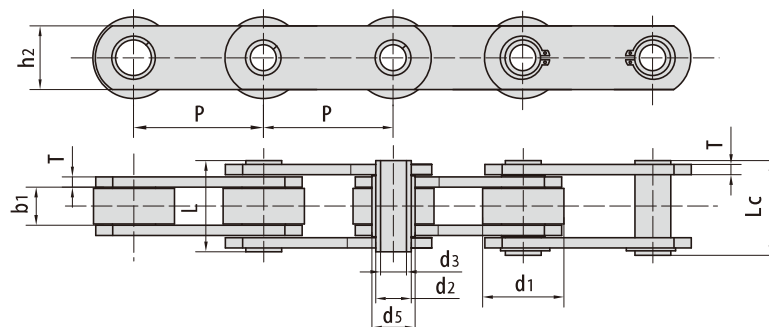


无滚子
without rollers




带S型小滚子
with S small rollers type



带P型大滚子
with P large rollers type




带F型带肩滚子
with F flanged rollers type



D N 链号 D N Chain No.	节距 Pitch							滚子尺寸 Roller dimension				
	P							d1 max	d4 max	d6 max	d7 max	G
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
FVC 63	63.0	80.0	100.0	125.0	160.0	-	-	40.0	26.0	50.0	63.0	5.0
FVC 90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	48.0	30.0	63.0	78.0	6.5
FVC 112	100.0	125.0	160.0	200.0	250.0	-	-	55.0	32.0	72.0	90.0	7.5
FVC 140	100.0	125.0	160.0	200.0	250.0	-	-	60.0	36.0	80.0	100.0	9.0
FVC 180	125.0	160.0	200.0	250.0	315.0	-	-	70.0	42.0	100.0	125.0	13.0
FVC 250	160.0	200.0	250.0	315.0	400.0	-	-	80.0	50.0	125.0	155.0	15.0
FVC 315	160.0	200.0	250.0	315.0	400.0	-	-	90.0	60.0	140.0	175.0	18.0

D N 链号 D N Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter		套筒直径 Bush diameter	销轴长度 Pin length		链板厚度 Plate thickness	链板高度 Plate depth	抗拉强度 Tensile strength
	b1 min	d2 max	d3 min	d5 max	L max	Lc max	T max	h2 max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
FVC 63	22.0	12.0	8.0	18.0	45.0	50.5	4.0	30.0	46.0/10454
FVC 90	25.0	14.0	10.0	20.0	53.0	56.5	5.0	35.0	73.0/16590
FVC 112	30.0	16.0	11.0	22.0	62.0	63.0	6.0	40.0	90.0/20454
FVC 140	35.0	18.0	12.0	26.0	67.0	68.5	6.0	45.0	110.0/25000
FVC 180	45.0	20.0	14.0	30.0	86.0	88.0	8.0	50.0	145.0/32954
FVC 250	55.0	26.0	18.0	36.0	97.0	103.5	8.0	60.0	215.0/48863
FVC 315	65.0	30.0	20.0	42.0	117.0	121.5	10.0	70.0	295.0/67044

Z系列输送链 Conveyor chains (Z series)

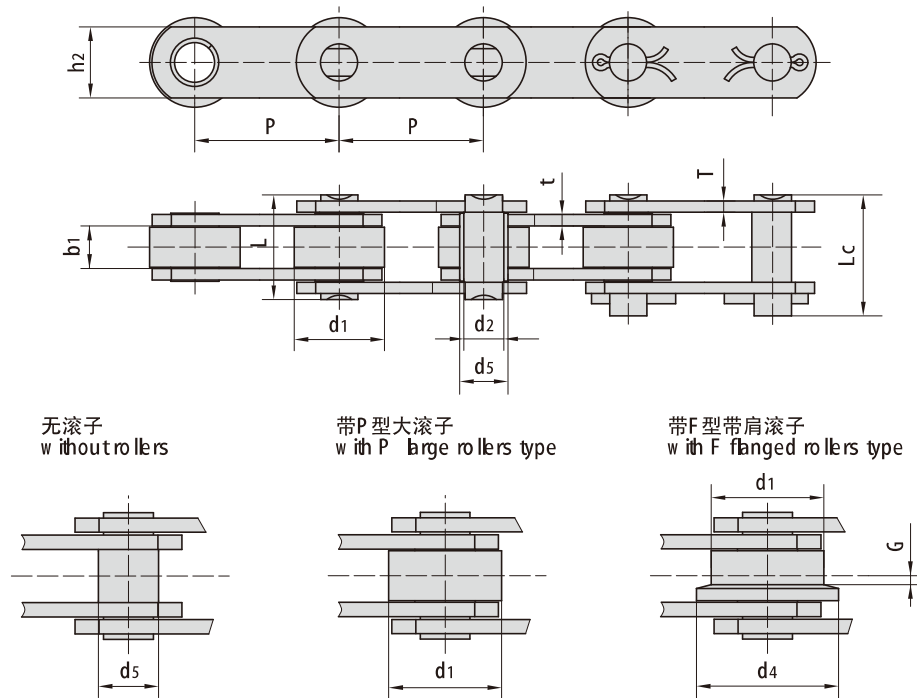


东华链条 Donghua Chain No.	节距 Pitch							滚子尺寸 Roller dimension			套筒直径 Bush diameter
	P							d1 max	d4 max	G	d5 max
	mm							mm	mm	mm	mm
Z40	50.8	63.5	76.2	88.9	101.6	127.0	152.4	31.75	40.0	2.5	17.0
Z100	76.2	88.9	101.6	127.0	152.4	177.8	203.2	47.50	60.0	3.5	23.0
Z160	101.6	127.0	152.4	177.8	203.2	228.6	254.0	66.70	82.0	3.5	33.0
Z300	152.4	177.8	203.2	254.0	304.8	-	-	88.90	114.0	8.5	38.0

东华链条 Donghua Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter	链板高度 Plate depth	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	
	b1 min	d2 max	h2 max	L max	Lc max	t/T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/bf	kN/bf
Z40	15.0	14.0	25.0	37.0	40.5	4.0	40.0/9091	50.0/11362
Z100	19.0	19.0	40.0	45.0	50.5	5.0/4.0	100.0/22725	130.0/29540
Z160	26.0	26.9	50.0	58.0	63.5	7.0/5.0	156.0/35451	200.0/45454
Z300	38.0	32.0	60.0	84.0	94.0	10.0/8.0	300.0/68175	380.0/86362

*Q 表示热处理后的抗拉强度
*Q denotes the tensile strength after hardened

Z系列带附板输送链 Conveyor chains with attachments (Z series)

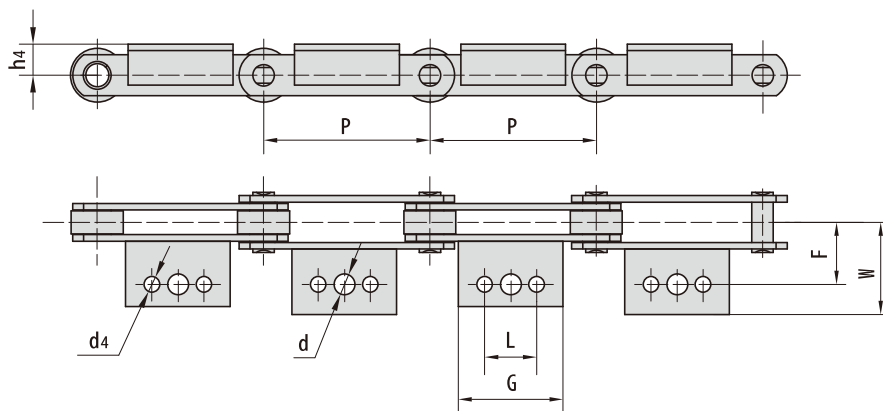


东华链号 Donghua Chain No.		P	L	G	d	d4	F	W	h4
		mm	mm	mm	mm	mm	mm	mm	mm
Z40	△	50.8	—	45.0	10.7	9.3	38.1	64.5	19.0
	△ ☆	63.5	22.2	43.0				56.0	
	△ ☆	76.2		43.0				68.0	
	▲	88.9	31.8	50.0				56.0	
	▲	101.6		64.0				55.0	
	▲	127.0	57.2	84.0				56.0	
	▲	152.4		84.0				56.0	
Z100	△	76.2	—	30.0	14.0	10.5	44.5	65.0	32.0
	△	88.9	31.8	64.0					
	▲	101.6		64.0					
	△ ☆	127.0		84.0					
	▲	152.4	57.2	114.5					
	△ ☆	177.8	80.0	110.0					
	△ ☆	203.2		110.0					
Z160	△	101.6	—	35.0	15.5	12.3	54.0	77.0	38.0
	△ ☆	127.0	31.7	56.0					
	△ ☆	152.4	57.2	84.0					
	△ ☆	177.8		84.0					
	△ ☆	203.2	100.0	130.0					
	△ ☆	228.6		150.0					
	△ ☆	254.0		170.0					
Z300	△	152.4	38.1	70.0	17.0	14.0	73.0	100.0	51.0
	△	177.8		70.0					
	△ ☆	203.2	76.2	100.0					
	△ ☆	254.0	90.0	152.4					
	△ ☆	304.8	190.0	225.0					

△表示附板带1个孔
△attachment with 1 hole

☆表示附板带2个孔
☆attachment with 2 holes

▲表示附板带3个孔
▲attachment with 3 holes

ZE系列输送链 Conveyor chains (ZE series)

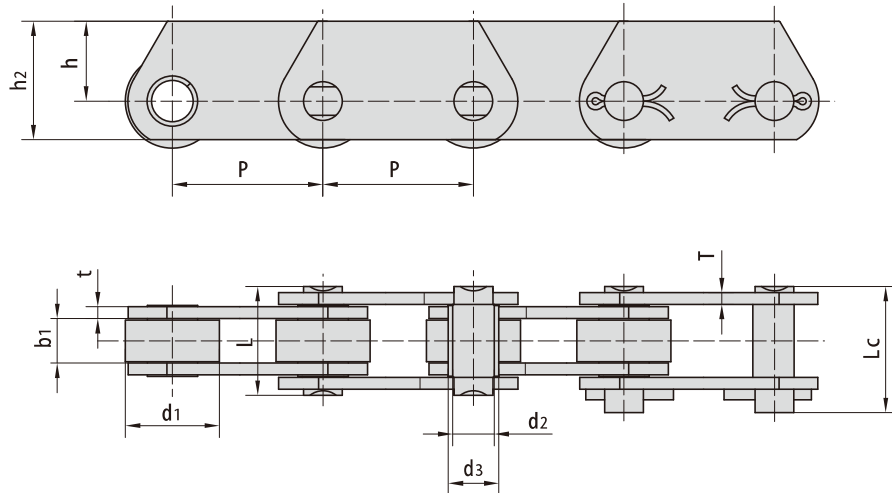


东华链号 Donghua Chain No.	节距 Pitch							滚子直径 Roller diameter	销轴直径 Pin diameter	套筒直径 Bush diameter
	P							d_1 max	d_2 max	d_3 max
	mm							mm	mm	mm
ZE 40	50.8	63.5	76.2	88.9	101.6	127.0	152.4	31.75	14.0	17.0
ZE 100	76.2	88.9	101.6	127.0	152.4	177.8	203.2	47.50	19.0	23.0
ZE 160	101.6	127.0	152.4	177.8	203.2	228.6	254.0	66.70	26.9	33.0
ZE 300	152.4	177.8	203.2	254.0	304.8	-	-	88.90	32.0	38.0

东华链号 Donghua Chain No.	内节内宽 Width between inner plates	销轴长度 Pin length		链板高度 Plate depth		链板厚度 Plate thickness	抗拉强度 Tensile strength	
	b_1 min	L max	L_c max	h_2 max	h max	t/T max	Q min	* Q min
	mm	mm	mm	mm	mm	mm	kN/bf	kN/bf
ZE 40	15.0	37.0	40.5	40.0	27.0	4.0	40.0/9091	60.0/13636
ZE 100	19.0	45.0	50.5	50.0	30.0	5.0/4.0	100.0/22725	160.0/36360
ZE 160	26.0	58.0	63.5	70.0	45.0	7.0/5.0	160.0/36360	200.0/45454
ZE 300	38.0	84.0	94.0	90.0	60.0	10.0/8.0	300.0/68175	380.0/86362

*Q 表示热处理后的抗拉强度

*Q denotes the tensile strength after hardened

ZC系列空心销轴输送链 Hollow pin conveyor chains (ZC series)

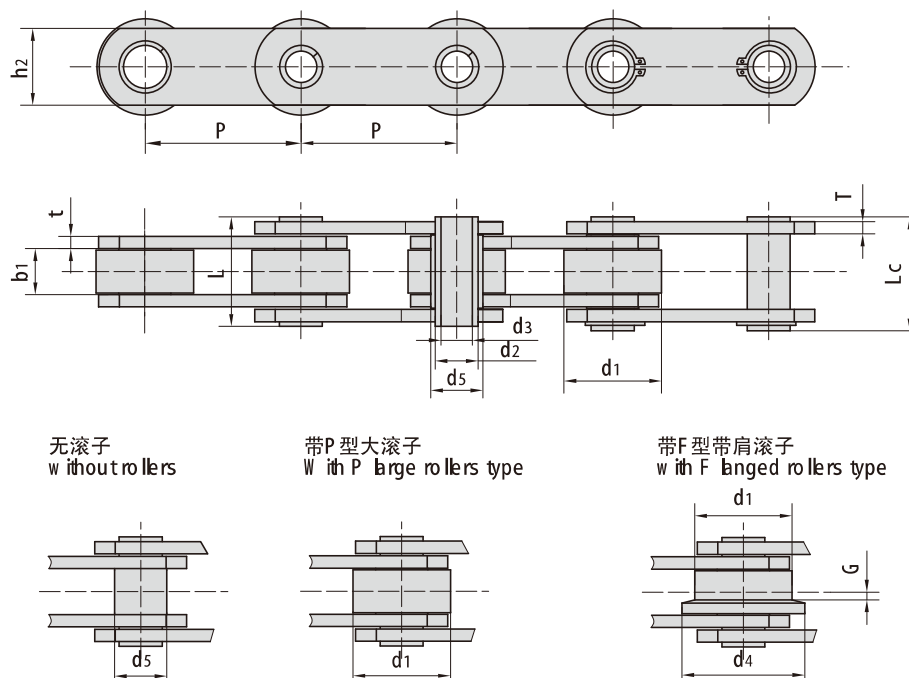

东华链号 Donghua Chain No.	节距 Pitch							滚子尺寸 Roller dimension			套筒直径 Bush diameter	链板高度 Plate depth
	P							d1 max	d4 max	G	d5 max	h2 max
	mm							mm	mm	mm	mm	mm
ZC 21	38.1	50.8	63.5	76.2	-	-	-	25.40	-	-	11.0	18.0
ZC 40	50.8	63.5	76.2	88.9	101.6	127.0	152.4	31.75	40.0	2.5	17.0	25.0
ZC 60	76.2	88.9	101.6	127.0	152.4	177.8	203.2	47.50	60.0	3.5	23.0	40.0
ZC 150	101.6	127.0	152.4	177.8	203.2	228.6	254.0	66.70	82.0	4.0	33.0	50.0
ZC 300	152.4	177.8	203.2	254.0	304.8	-	-	88.90	114.0	8.5	38.0	60.0


东华链号 Donghua Chain No.	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	
	b1 min	d2 max	d3 min	L max	Lc max	t/T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/bf	kN/bf
ZC 21	12.7	9.0	6.5	26.0	27.5	2.5	21.0/4772	27.1/6159
ZC 40	15.0	14.0	10.2	36.4	37.7	4.0	40.0/9091	50.0/11362
ZC 60	19.0	19.0	13.2	45.0	46.5	5.0/4.0	60.0/13636	120.0/27270
ZC 150	26.0	26.9	20.2	58.0	60.5	7.0/5.0	150.0/34087	190.0/43177
ZC 300	38.0	32.0	22.5	83.0	85.0	10.0/8.0	300.0/68175	380.0/86362

*Q 表示热处理后的抗拉强度

*Q denotes the tensile strength after hardened

非标空心销轴输送链

Non-standard hollow pin conveyor chains

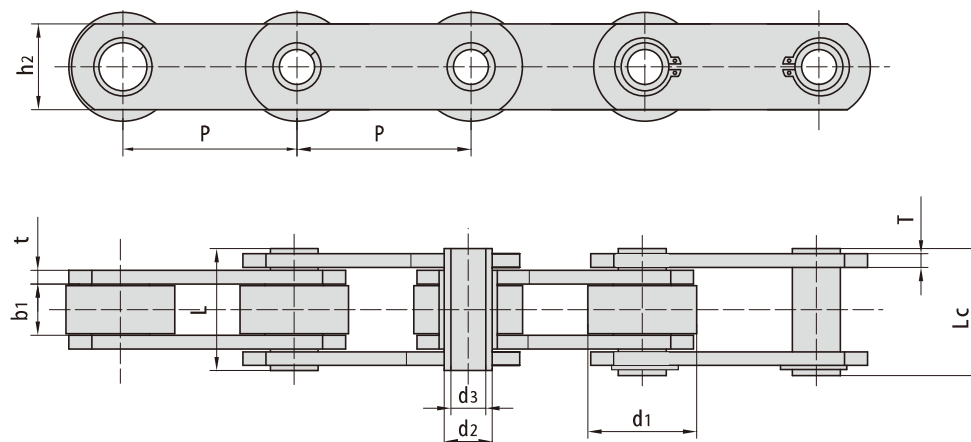


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M C 18F1-P-40	40.00	22.00	9.00	9.00	6.20	23.00	24.50	18.0	2.5	21.0/4721	23.1	1.57
M C 21F1-P-76.2	76.20	25.40	12.70	9.00	6.60	26.00	27.50	19.0	2.5	21.0/4721	23.1	1.50
M C 28F1-P-80	80.00	36.00	20.00	12.00	8.50	36.80	38.00	25.0	3.0	42.0/9442	46.0	3.24
*M C 28F2-B-63	63.00	17.50	20.00	13.00	8.20	38.80	40.00	25.0	3.5	28.0/6275	31.0	2.35
M C 35F1-P-35	35.00	20.00	25.00	9.00	6.00	29.00	31.00	20.0	2.5	27.0/6070	30.0	2.08
M C 35F2-P-50	50.00	31.00	15.00	14.00	10.20	35.00	37.00	25.0	4.0	40.0/8992	44.0	3.46
M C 37F1-P-35	35.00	20.00	16.00	14.00	10.40	30.00	31.70	26.0	2.5	37.0/8318	40.0	2.10
M C 40-PF1-100	100.00	35.00	23.40	14.00	10.20	36.00	37.50	25.0	4.0	40.0/8992	44.0	2.79
M C 40F9-P-50	50.00	35.00	17.00	14.00	10.20	37.00	38.50	30.0	4.0	49.0/11015	55.0	5.10
M C 40F11-P-50.8	50.80	38.10	15.50	14.28	10.20	37.00	38.50	27.0	4.0	40.0/8992	44.0	5.00
M C 40F21-P-50.8	50.80	38.10	15.50	14.28	9.70	37.00	-	27.0	4.0	50.0/11241	55.0	5.17
M C 40F28-P-50.8	50.80	38.10	15.80	14.28	9.70	37.00	49.50	27.0	4.0	60.0/13489	66.0	5.10
M C 40F29-P-50.8	50.80	38.10	14.50	13.00	10.05	37.70	39.00	28.0	4.8/4.0	40.0/8992	44.0	4.89
*M C 40F24-B-60	60.00	18.00	22.00	14.00	10.00	43.40	44.50	27.0	4.0	50.0/11240	55.0	3.90
*M C 40F12-B-75	75.00	20.00	22.00	14.00	10.20	41.00	42.10	30.0	3.0	40.0/8992	44.0	2.48
M C 56F1-S-80	80.00	30.00	24.00	16.00	10.20	45.50	47.00	35.0	4.0	56.0/12600	62.0	4.64
M C 56F1-P-80	80.00	50.00	24.00	16.00	10.20	45.50	47.00	35.0	4.0	56.0/12600	62.0	7.39
M C 56F5-P-80	80.00	50.00	24.00	15.50	10.20	53.50	55.00	35.0	6.0	67.5/15174	75.0	8.50
M C 56-P-85	85.00	50.00	24.00	15.50	10.20	45.50	47.00	35.0	4.0	56.0/12600	62.0	6.91
M C 56F2-P-100	100.00	50.00	23.00	16.00	10.20	45.50	47.00	35.0	4.0	56.0/12600	62.0	6.27

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

非标空心销轴输送链 Non-standard hollow pin conveyor chains

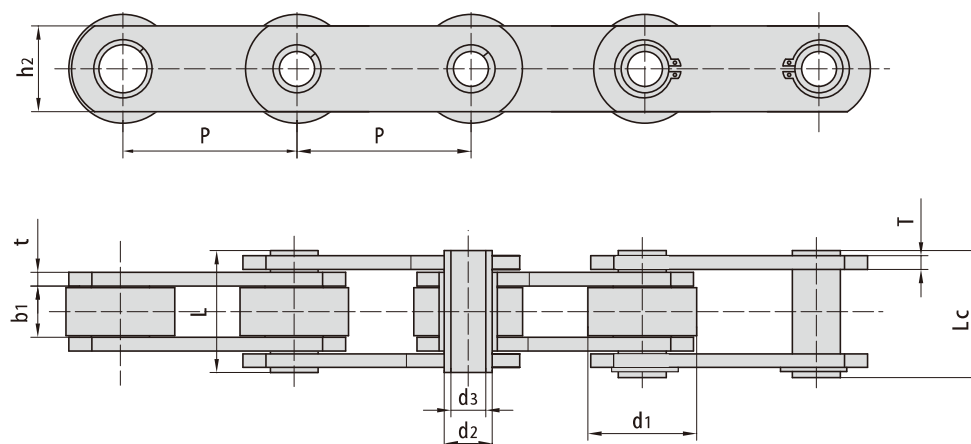


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M C 56F6-P-100	100.00	50.00	24.00	15.50	10.20	50.00	51.30	35.0	5.0	56.0/12600	62.0	6.80
M C 60F7-P-152.4	152.40	47.50	19.00	19.00	12.50	45.00	46.50	40.0	5.0/4.0	120.0/27000	132.0	4.97
M C 60F7-P-203.2	203.20	47.50	19.00	19.00	12.50	45.00	46.50	40.0	5.0/4.0	120.0/27000	132.0	4.43
M C 60F10-P-127	127.00	47.50	19.00	19.00	13.20	42.00	44.00	40.0	5.0/4.0	60.0/13489	66.0	5.34
M C 60F12-P-88.9	88.90	47.50	19.00	19.00	13.90	45.00	46.50	40.0	5.0/4.0	60.0/13489	66.0	6.38
M C 60F14-P-101.6	101.60	50.00	33.10	19.00	13.20	66.50	68.00	40.0	6.4	100.0/22480	110.0	9.74
*M C 60F15-B-101.6	101.60	24.00	19.00	19.00	13.20	45.00	46.50	40.0	5.0/4.0	60.0/13489	66.0	4.19
M C 112F1-P-100	100.00	70.00	32.00	22.00	16.30	67.00	68.50	50.0	6.0	112.0/25195	123.2	14.91
*M C 220-B-152.4	152.40	33.00	26.00	27.50	19.43	60.00	61.40	55.0	7.5/5.5	220.0/49484	242.0	7.80
M C 150F2-P-110	110.00	66.70	25.40	26.90	20.20	58.00	60.50	51.0	7.1/5.1	106.7/24003	118.0	13.50
M C 300F1-F-254	254.00	95.00	38.00	46.00	36.00	95.00	97.00	75.0	13.0/8.0	392.0/88126	431.2	22.50
M C 300F2-F-203.2	203.20	88.90	38.00	32.00	19.60	83.00	85.00	60.0	10.0/8.0	300.0/67479	330.0	20.30
*FVC 63F1-B-40	40.00	18.00	22.00	12.00	8.20	47.50	49.00	35.0	5.0	46.0/10348	51.0	5.34
*FVC 63F2-B-50	50.00	17.00	22.00	12.00	8.20	41.00	42.00	25.0	3.0	30.0/6750	33.0	2.24
FVC 63F3-P-63	63.00	40.00	22.00	11.70	8.10	44.00	46.00	30.0	4.0	46.0/10348	51.0	5.83
FVC 63F15-P-63	63.00	40.00	21.50	12.00	8.30	42.00	44.00	30.0	4.0	46.0/10348	51.0	5.85
FVC 90F1-P-63	63.00	42.00	25.00	14.00	10.20	52.00	53.50	35.0	5.0	73.0/16422	80.0	5.33
FVC 90F6-F-125	125.00	63.00	25.00	18.50	14.30	52.00	53.50	35.0	5.0	73.0/16422	80.0	8.20
FVC 112F2-P-100	100.00	95.00	30.00	17.00	11.20	60.20	61.50	40.0	6.0	130.0/29225	143.0	9.69
*FVC 140F1-B-80	80.00	26.00	35.00	18.00	12.50	65.00	67.00	46.0	6.0	110.0/24745	120.0	7.80
FVC 140F7-F-160	160.00	60.00	35.00	18.00	12.00	67.00	69.30	45.0	6.0	110.0/24745	120.0	6.40
FVC 140F6-P-109	109.00	50.00	28.00	18.00	12.00	56.00	57.50	40.0	5.0	60.0/13489	66.0	8.00

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

非标空心销轴输送链


Non-standard hollow pin conveyor chains

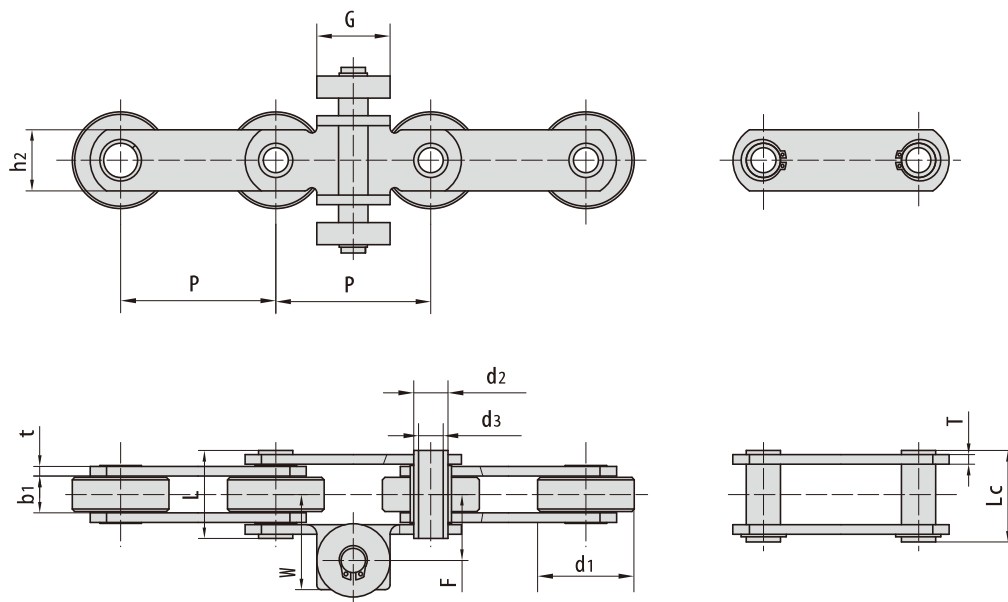

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	t/T max
	mm	mm	mm	mm	mm	mm	mm	mm	mm
MC40F25-P-63.5	63.50	39.60	15.00	14.00	10.00	36.0	37.5	25.00	4.00

东华链号 Donghua Chain No.	附件尺寸 Attachment dimensions			抗拉强度 Tensile strength	每米长重 Weight per meter
	F	W	G	Q _{min}	q
	mm	mm	mm	kN/bf	kg/m
MC40F25-P-63.5	30.00	42.00	30.00	40.0/8992	4.83

输送链 Conveyor chains

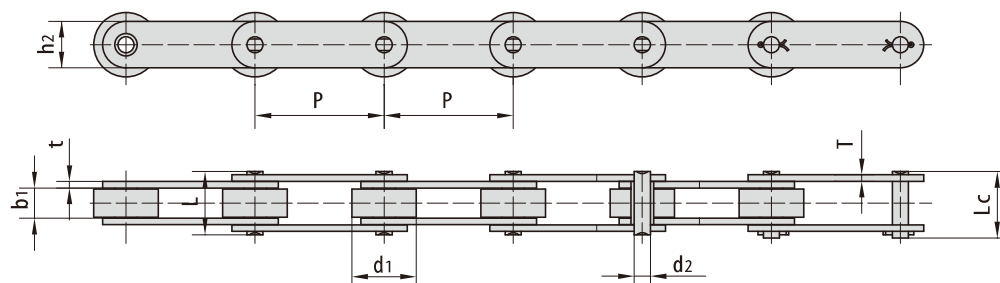


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 12.7F15	12.700	8.51	7.30	4.45	16.80	19.20	7.00	1.60	6.0/1349	6.60	0.53
P 15.875	15.875	12.70	11.00	3.66	18.70	19.90	8.00	0.60	3.0/674	3.30	0.80
※P 19.05	19.050	12.07	12.50	7.50	31.60	33.60	20.00	4.15/3.25	50.0/11240	55.0	2.56
P 19.05F1	19.050	11.91	9.90	5.72	26.00	28.60	17.00	3.00	30.0/6744	33.0	1.84
P 19.05F2	19.050	14.25	13.00	7.80	33.20	36.20	19.40	4.00/3.70	40.0/8992	44.0	2.92
P 19.05F5	19.050	14.20	12.70	7.10	29.50	31.70	19.00	3.25	30.0/6744	33.0	2.47
P 19.05F6	19.050	14.24	12.72	7.80	31.50	31.50	18.80	4.00/3.10	58.8/13218	64.7	2.67
P 20F1	20.000	12.00	16.00	6.00	32.10	34.50	18.00	3.00	35.5/7986	39.1	2.11
P 22	22.000	14.00	14.00	8.00	37.00	40.00	40.00	5.00/4.00	40.0/8992	44.0	4.10
P 22.23F1	22.230	14.00	12.20	6.00	27.50	29.50	17.78	2.80	30.0/6744	33.0	1.80
P 25F4	25.000	15.00	18.00	7.00	34.50	37.50	21.00	3.00	45.0/10116	49.5	2.55
P 25F5	25.000	15.88	17.02	8.28	36.10	—	21.00	4.15/3.10	60.0/13488	69.0	2.84
P 25F7	25.000	11.91	13.00	5.94	26.80	29.20	20.50	2.42	30.0/6744	33.0	1.85
P 25.4F5	25.400	14.00	12.70	7.50	30.00	33.00	22.50	3.50/3.00	50.0/11240	55.0	2.47
P 25.4F8	25.400	12.70	12.70	7.00	28.50	30.50	20.80	3.00	45.0/10116	49.5	1.89
P 25.4F9	25.400	14.00	12.70	7.00	28.50	30.50	19.70	3.00	45.0/10116	49.5	1.88
P 25.4F10	25.400	12.00	11.00	5.72	25.80	27.50	17.00	2.60	22.4/5035	25.0	1.66
P 26	26.000	15.88	16.15	7.92	33.50	36.80	22.00	3.25	50.0/11240	55.0	2.87
P 30	30.000	15.88	17.02	8.28	35.60	38.70	20.00	3.50/3.00	60.0/13488	66.0	2.35
P 30F1	30.000	15.88	9.70	8.28	24.80	65.50	22.00	3.10/2.50	45.0/10116	49.5	1.87
P 30F7	30.000	15.88	20.00	8.28	39.00	42.50	21.50	4.00/3.25	40.0/8992	44.0	2.72
P 30F10	30.000	16.00	20.10	8.28	39.00	42.70	21.20	4.00/3.40	60.0/13488	69.0	2.72
P 31.75F12	31.750	19.05	13.00	7.92	29.60	33.40	18.00	3.00	33.8/7598	37.0	2.20
P 35F4	35.000	18.00	18.00	8.28	35.40	38.30	24.00	3.00	60.0/13488	66.0	2.51
P 35F7	35.000	22.00	22.00	11.00	45.00	50.30	31.00	4.50	84.0/18883	92.4	4.82
P 38.1F11	38.100	25.40	21.50	12.00	40.00	43.90	35.00	3.00	70.0/15736	77.0	5.18
P 38.1F17	38.100	25.40	23.00	12.00	41.50	46.00	35.00	3.00	70.0/15736	77.0	5.25
P 38.1F19	38.100	25.40	22.00	12.00	40.00	43.90	35.00	3.00	70.0/15736	77.0	5.18
P 40F9	40.000	18.00	22.00	12.00	47.80	52.50	35.00	5.00	120.0/26977	132.0	5.90
P 41F1	41.000	19.05	26.90	10.19	44.10	48.50	27.00	3.00	50.0/11240	55.0	2.87
P 41.3F4	41.300	16.00	12.00	9.00	26.30	29.80	22.00	2.00	45.0/10116	49.5	1.72
P 41.3F6	41.300	16.00	10.00	9.00	27.00	30.00	21.00	3.00	40.0/8992	44.0	1.80

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

输送链 Conveyor chains

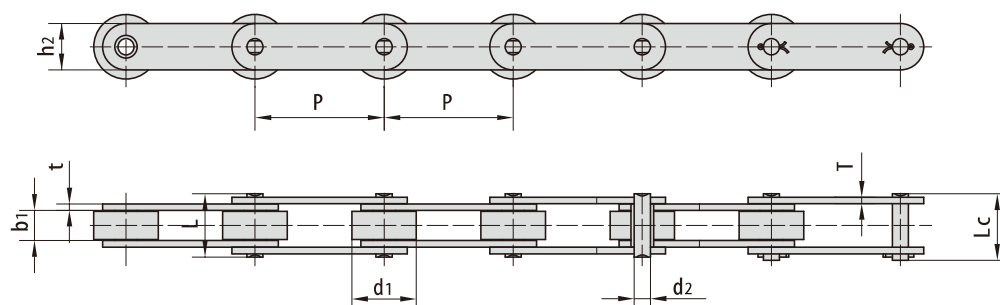


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P41.3F11	41.30	16.00	10.00	9.00	26.00	29.50	21.00	3.00	40.0/8992	44.0	1.79
P41.3F12	41.30	16.00	7.80	9.00	21.00	24.00	21.00	2.03	26.7/6002	29.4	1.29
P41.3F13	41.30	16.00	16.00	9.00	33.00	36.50	21.00	3.00	40.0/8992	44.0	2.00
P41.3F17	41.30	16.00	16.00	9.00	33.00	36.50	30.00	3.00	40.0/8992	44.0	2.84
P41.4F2	41.40	15.88	20.40	9.00	38.00	41.50	26.00	3.00	50.0/11240	55.0	2.29
*P41.5F2	41.50	19.00	20.10	9.00	47.90	-	20.00	5.00	55.0/12364	60.5	3.33
P42	42.01	22.23	25.40	11.10	-	55.25	28.50	4.80	100.0/22496	110.0	5.36
P42F1	42.01	22.23	25.40	11.10	50.30	54.30	28.50	4.80	90.0/20232	99.0	5.26
P42F9	42.01	22.35	25.40	11.10	-	57.90	28.50	4.80	90.0/20232	100.0	5.78
P42F10	42.01	22.23	25.40	11.10	-	55.25	28.50	4.80	99.0/22256	110.0	5.50
P44F1	44.00	25.30	25.00	15.90	86.00	88.00	38.00	10.00	250.0/56202	275.0	8.77
P44.45	44.45	22.23	12.57	5.94	25.90	27.70	18.00	2.42	31.8/7148	35.0	1.73
P44.45F1	44.45	22.23	24.70	11.10	62.00	65.50	32.00	6.70	110.0/24728	121.0	7.30
P44.45F18	44.45	25.40	45.22	12.70	74.40	77.40	39.70	5.60	172.4/38756	189.6	9.06
P44.6F1	44.60	25.40	25.22	12.70	54.40	59.00	41.00	5.60	169.0/37991	185.9	7.70
P45F4	45.00	19.05	19.56	9.53	41.20	45.50	30.00	4.00	75.0/16860	82.5	3.93
P49.8	49.80	28.58	31.55	14.27	64.80	69.60	47.80	6.40	222.4/49997	244.6	10.39
P50	50.00	25.40	25.40	14.63	54.30	57.80	40.00	5.00	100/22480	110.0	7.50
P50F1	50.00	29.21	30.99	17.81	-	66.00	42.20	7.00	210.0/47726	231.0	9.68
P50F2	50.00	31.00	14.50	13.20	33.30	37.00	25.00	3.10	44.0/9891	48.4	3.47
P50F7	50.00	24.00	20.00	12.00	51.20	55.50	30.00	6.00	49.0/11023	54.0	5.65
P50F11	50.00	19.05	19.56	10.19	41.30	45.00	28.00	4.50/4.00	95.5/21371	104.5	3.60
P50F14	50.00	24.00	20.00	12.00	43.00	47.50	30.00	4.00	65.0/14612	71.5	5.08
P50F15	50.00	28.58	31.55	14.27	64.80	69.60	47.80	6.40	222.4/49997	244.6	10.38
P50F3	50.00	31.00	15.00	9.53	35.40	38.65	25.00	4.00	83.0/18659	91.3	4.12
P50F21	50.00	25.40	25.40	14.63	54.00	58.00	40.00	5.00	120.0/26977	132.0	7.35
P50F26	50.00	25.00	15.75	7.92	32.70	36.50	22.00	3.30	56.7/12746	62.0	2.50

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

输送链 Conveyor chains

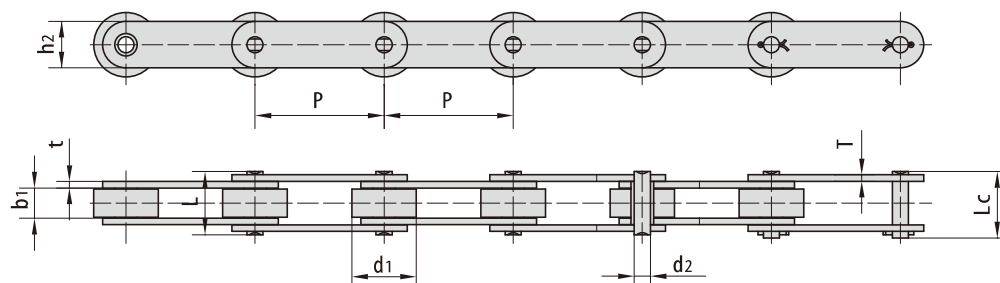


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 50F31	50.00	30.00	15.00	12.00	40.30	44.50	30.00	4.50	36.0/8093	39.6	4.89
*P 50F36	50.00	19.95	25.00	13.92	52.80	57.00	40.00	5.00	99.0/22255	108.9	6.45
P 50F49	50.00	25.40	25.40	14.63	53.40	57.80	50.00	5.00	100.0/22480	110.0	12.60
*P 50F58	50.00	20.00	25.40	14.63	54.00	58.00	40.00	5.00	120.0/26976	132.0	6.40
P 50.8F1	50.80	30.00	10.00	11.70	30.20	34.50	26.04	4.00	85.0/19108	93.5	3.60
P 50.8F12	50.80	30.00	10.00	11.60	28.00	-	26.20	3.50/3.00	70.0/15736	77.0	2.82
P 50.8F16	50.80	35.00	12.00	14.50	40.00	45.50	30.00	5.00	70.0/15736	77.0	5.36
P 50.8F31	50.80	31.75	12.70	9.53	31.00	33.50	25.40	3.30	60.0/13488	66.0	3.35
*P 50.8F38-B	50.80	25.40	36.50	15.90	80.00	-	44.45	8.00	190.0/42712	209.0	4.14
*P 50.8F42	50.80	15.80	17.60	10.00	40.00	44.00	26.00	4.00	60.0/13488	66.0	2.96
P 50.8F50	50.80	25.40	25.40	14.00	57.60	63.40	40.00	6.40	200.0/44960	220.0	8.10
P 50.8F56	50.80	30.00	10.00	11.60	30.00	34.20	26.20	4.50/3.00	83.0/18658	91.3	3.07
*P 50.8F59-B	50.80	18.40	25.40	14.00	58.20	64.70	40.00	6.40	195.0/43836	214.5	7.50
P 54F2	54.00	19.05	19.56	10.19	41.30	45.00	26.40	4.50/3.50	95.0/21356	104.5	3.15
P 58	58.34	18.00	22.23	9.90	47.60	-	25.00	5.00	80.0/17984	88.0	3.86
P 58F1	58.34	18.00	22.23	9.90	51.60	-	30.00	6.00	84.0/18883	92.4	5.16
P 60F4	60.00	16.87	19.81	7.19	35.00	38.00	19.30	2.80	39.1/8790	43.0	1.61
P 63F20	63.00	11.91	12.57	5.94	28.20	31.00	20.00	3.00	31.1/6991	34.2	2.43
P 63.5	63.50	19.05	18.90	9.53	44.60	47.20	28.60	5.00	86.7/19704	95.4	3.77
P 63.5F7	63.50	25.00	24.00	10.00	47.00	50.70	35.00	4.00	90.0/20232	99.0	4.35
P 63.5F12	63.50	31.80	15.25	14.00	38.00	39.50	26.00	4.00	45.0/10116	49.5	4.03
P 63.5F22	63.50	31.80	15.25	14.00	38.00	42.50	26.00	4.00	45.0/10116	49.5	4.03
P 63.5F36	63.50	19.05	19.56	10.19	36.50	37.70	27.00	3.00	56.7/12746	62.4	2.60
P 66.27F1	66.27	22.22	28.57	11.11	64.30	68.30	28.57	6.35	55.0/12364	60.5	5.19
P 66.27F5	66.27	22.35	28.70	11.10	54.60	58.60	28.50	4.80	100.0/22480	110.0	4.23
P 66.27F9	66.27	22.35	28.20	11.10	61.20	65.50	28.70	6.40	75.6/16995	83.2	5.50
P 69F1	69.85	615.88	17.02	8.28	36.70	39.70	20.60	4.00/3.25	60.8/13668	66.9	1.50
*P 69F3	69.85	15.88	17.00	8.28	35.20	38.50	20.60	4.00/3.26	60.8/13669	66.9	1.50
P 69.85F1	69.85	31.75	25.40	14.27	66.40	73.50	34.93	7.90	170.0/38243	187.0	8.76
P 75F8-G-2	75.00	31.80	16.10	8.00	40.00	40.00	22.00	3.20	60.8/13668	66.9	2.43
P 75F35	75.00	16.00	16.10	8.00	33.30	36.00	22.00	3.20	60.00/13488	66.0	1.75
P 75F53	75.00	15.50	18.00	7.92	35.40	39.10	22.00	3.25	29.40/6609	32.3	1.73

*套筒链：表中滚子直径d1为套筒直径


*Bush chain: d1 in the table indicates the external diameter of the bush.

输送链 Conveyor chains

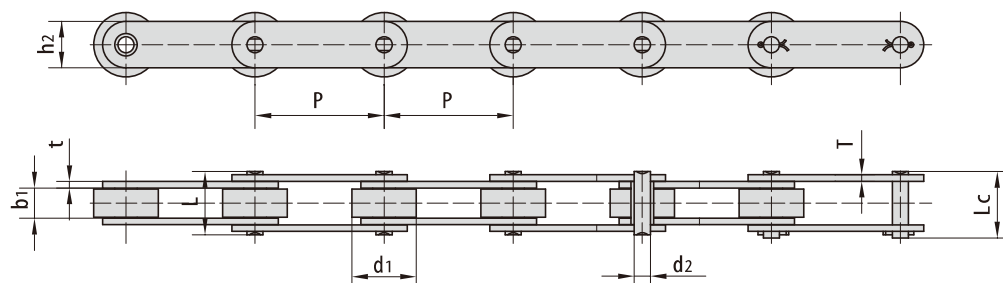


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	$d_{1\max}$	$b_{1\min}$	$d_{2\max}$	$L_{\max}$	$L_{c\max}$	$h_{2\max}$	$t/T_{\max}$	$Q_{\min}$	Q_0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P75F58-S-75	75.00	15.50	18.00	7.92	35.40	39.10	22.00	3.25	29.4/6609	32.3	1.73
P76.2F2	76.20	50.00	26.00	24.00	69.60	74.70	59.50	8.00	350.0/79544	385.0	19.00
P76.2F10	76.20	11.91	11.00	5.94	28.00	30.40	18.50	3.25	31.8/7148	35.0	1.30
P76.2F14	76.20	38.10	25.40	11.10	50.90	55.00	28.60	4.80	85.0/19108	94.0	5.80
P76.2F25	76.20	43.18	49.28	23.90	130.00	130.00	60.45	14.20	697.0/156691	766.7	32.30
P76.2F35	76.20	12.07	13.00	8.10	24.50	26.50	18.00	1.85	29.0/6519	31.9	0.77
P76.2F38	76.20	40.00	25.40	14.70	57.50	62.00	36.00	6.00	116.0/26077	127.0	8.00
P76.2F71	76.20	28.70	31.75	14.20	66.20	72.00	38.10	6.40	180.00/41200	198.0	7.80
P78.11F11	78.11	31.75	31.75	15.88	86.50	86.50	38.10	9.53	161.6/36329	177.8	11.34
P80F1	80.00	42.00	24.00	15.00	55.00	60.00	60.00	6.00	250.0/56202	275.0	11.90
P80F5	80.00	28.00	34.00	16.00	68.00	72.00	45.00	5.00/8.00	190.0/43181	209.0	8.80
P80F6	80.00	30.00	32.00	15.00	58.60	62.60	60.00	5.00	98.0/22272	108.0	9.75
P80F10	80.00	42.00	22.00	15.00	53.00	58.00	60.00	6.00	250.0/56202	275.0	11.40
P80F37	80.00	26.00	25.00	14.00	59.30	59.30	35.00	6.00/5.00	155.0/34845	170.5	5.72
P80F35	80.00	42.00	23.00	16.00	56.00	61.50	60.00	6.00	160.0/35969	176.0	11.50
P95F3	95.00	30.00	32.00	14.00	-	67.50	41.00	6.00	112.0/25178	123.2	7.20
P100H	100.00	20.00	28.00	14.00	-	62.00	40.00	5.00	103.0/23170	113.3	4.99
P100F7	100.00	29.00	30.00	14.50	-	71.00	38.10	6.00	95.0/21356	104.5	6.72
P100F25	100.00	25.40	31.50	14.00	62.60	77.50	38.10	6.00	95.0/21356	104.5	6.17
P100F52	100.00	38.00	18.00	9.53	47.00	49.30	32.00	5.00	86.7/19504	95.3	4.67
P100F53	100.00	52.00	21.00	14.00	46.00	51.00	40.00	5.00/4.00	110.0/24728	121.0	7.45
P100F56	100.00	35.00	13.50	10.00	-	46.00	30.00	5.00	70.0/15736	77.0	3.98
P100F77	100.00	38.00	17.50	11.30	48.00	48.00	32.00	4.50	65.0/14612	71.5	4.42
P100F84	100.00	38.00	22.00	9.50	57.50	57.50	35.00	6.00	70.0/15736	77.0	6.27
P100F92	100.00	60.00	38.00	20.00	81.00	94.00	47.00	8.00	220.0/49457	242.0	16.90
P100F111	100.00	29.00	30.00	14.50	71.00	71.00	38.10	6.00	95.0/21356	104.5	6.75
P100F114	100.00	40.00	23.00	12.00	-	56.00	32.00	6.00	100.0/22480	115.0	5.96
P100F122	100.00	38.00	17.50	11.30	41.80	45.90	32.00	4.50	65.0/14612	71.5	4.33
P100F125	100.00	22.20	22.00	11.30	54.50	58.00	32.00	6.00	110.0/24728	121.0	4.45
P100F161-S	100.00	30.00	31.60	15.90	-	80.00	38.10	8.00	130.0/29225	143.0	8.50
P100F166	100.00	25.00	30.00	14.50	-	71.00	38.10	6.00	95.0/21356	105.0	6.36
P100F196	100.00	38.00	18.00	10.00	-	51.50	29.00	5.60	100.0/22480	110.0	4.80

输送链 Conveyor chains

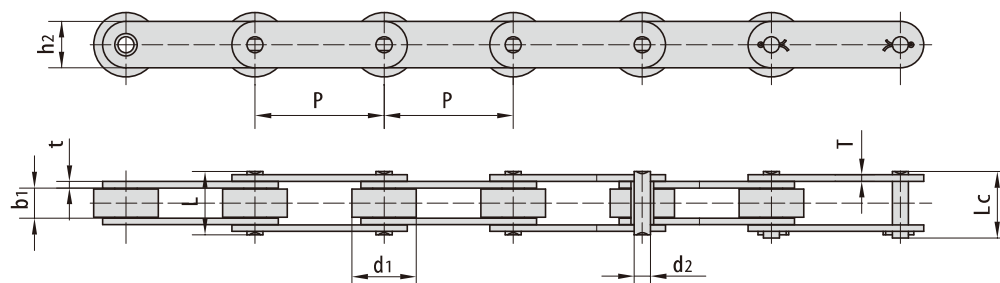

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	t/T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 100F223	100.00	29.00	30.00	14.50	-	71.00	38.10	6.00	225.0/50580	247.5	9.46
P 100F248	100.00	50.00	24.00	15.00	-	52.00	35.00	4.00	100.0/22480	110.0	6.40
P 100F250	100.00	15.88	19.00	7.92	37.40	40.00	26.00	3.20	30.0/6744	33.0	1.86
P 100F268	100.00	22.20	22.00	11.30	-	51.00	32.00	4.50	65.0/14612	71.5	3.60
P 100F279	100.00	50.00	33.00	14.00	-	70.00	62.00	6.00	112.0/25177	123.2	14.33
P 100F355	100.00	15.88	16.00	8.30	35.00	48.00	22.00	3.25	32.0/7194	35.2	3.00
P 100F360	100.00	20.00	25.00	14.00	60.60	65.80	35.00	6.00	120.0/26976	132.0	5.58
P 101.6F4	101.60	66.70	25.40	26.90	59.20	80.00	51.00	7.10/5.10	134.0/30454	147.4	15.70
P 101.6F18	101.60	31.75	15.00	10.00	37.00	41.00	25.00	4.00	40.0/8992	44.0	2.79
P 101.6F19	101.60	28.58	25.40	14.27	60.00	64.60	38.10	6.40	160.0/35968	176.0	6.60
P 101.6F24	101.60	47.60	22.20	11.11	47.80	52.20	32.00	4.50	75.0/16872	82.5	5.80
P 101.6F46	101.60	50.80	29.40	17.50	72.00	77.00	44.50	7.90	177.9/40013	197.4	12.56
P 101.6F51	101.60	44.45	28.70	11.10	54.50	60.80	28.70	4.80	53.7/12080	59.0	6.17
P 101.6F69	101.60	38.10	23.80	12.70	-	65.10	33.00	6.40	100.0/22480	110.8	6.50
P 101.6F71	101.60	38.10	25.40	11.10	51.10	55.20	28.70	4.80	552.5/11810	57.8	4.95
P 101.6F73	101.60	47.60	19.10	19.00	53.60	58.00	38.10	6.00	66.7/15000	73.4	7.52
P 101.6F80-S	101.60	30.00	31.60	15.90	-	80.00	38.10	8.00	130.0/29225	150.0	7.20
P 101.6F106	101.60	57.15	55.80	30.16	-	136.00	86.00	14.00	1100.0/247289	1255.0	46.00
P 101.6F157	101.60	44.45	33.27	15.88	-	82.60	38.10	7.90	113.2/25447	124.5	10.70
P 101.6F160-F	101.60	70.00	42.00	20.00	86.50	95.00	50.00	9.00	240.0/53952	264.0	23.50
P 101.6F166	101.60	28.50	30.90	14.50	-	70.00	38.00	6.50	150.0/33700	165.0	6.70
P 101.6F167	101.60	31.75	37.50	15.90	-	84.00	38.00	8.00	195.0/44000	214.5	8.90
P 101.6F184	101.60	31.80	31.60	15.90	-	81.00	38.10	8.00	130.0/29224	143.0	7.10
P 103.2F3	103.20	44.45	49.00	27.94	-	132.00	60.00	14.30	700.0/157366	770.0	27.88
P 103.2F6	103.20	44.45	52.00	25.00	116.70	120.35	60.00	14.5/12.0	650.0/146120	715.0	30.30
P 103.45	103.45	45.21	32.51	23.88	99.00	109.00	63.50	12.70	500.0/112480	535.0	25.00
P 103.89	103.89	66.68	57.15	33.32	-	148.00	88.90	15.88	500.0/112480	550.0	55.83
P 120.9F3	120.90	44.30	49.20	25.00	-	131.00	58.10	14.5/13.2	700.0/157360	770.0	24.42
P 125F1	125.00	50.00	55.00	26.00	-	110.00	60.00	8.00	300.0/68181	330.0	13.53
P 125F2H	125.00	32.00	18.50	8.00	-	43.00	20.00	4.00	60.0/13488	66.0	2.65
P 127F1	127.00	76.20	76.20	38.10	-	186.50	101.60	19.30	1690.0/380178	1860.0	73.85
P 127F9	127.00	66.70	26.00	26.90	60.50	87.00	50.00	7.0/5.0	156.0/35069	171.6	10.00

输送链 Conveyor chains

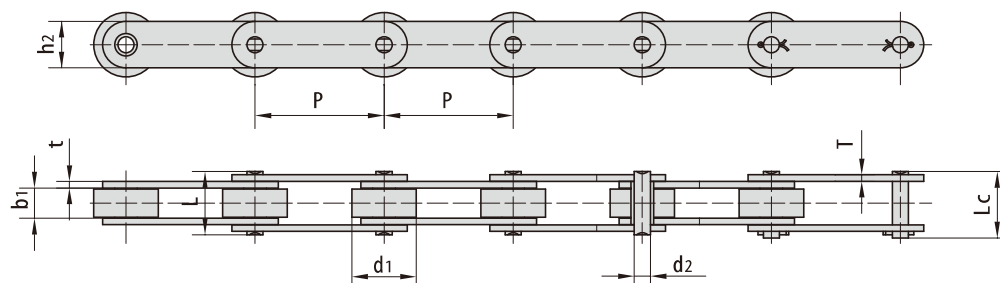


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 127F 10	127.00	76.20	86.20	38.10	-	185.50	101.60	19.05	1690.0/379912	1868.0	73.48
P 127F 13	127.00	63.50	64.70	35.00	-	169.50	88.90	19.05	860.0/193328	946.0	55.80
*P 135F 6	135.00	28.00	38.00	17.90	-	98.00	50.00	9.50	350.0/78680	385.0	12.08
P 150F 10	150.00	29.00	30.00	14.00	-	71.00	40.00	6.00	180.0/40492	198.0	5.71
P 150F 15	150.00	46.00	70.00	18.00	-	133.00	54.00	10.00	200.0/44961	220.0	17.25
P 150F 43	150.00	22.20	22.00	11.10	-	57.40	31.80	6.00	100.0/22480	115.0	4.10
P 150F 44	150.00	46.00	60.00	26.00	-	127.00	60.00	10.00	360.0/80931	415.0	18.45
P 150F 51	150.00	75.00	42.00	25.40	-	107.00	64.00	10.00	310.0/69688	341.0	24.60
P 150F 76	150.00	22.20	25.00	11.10	-	55.80	31.80	4.80	100.0/22480	115.0	3.43
P 150F 79	150.00	46.00	70.00	26.00	-	133.00	60.00	10.00	360.0/80931	414.0	19.00
P 150F 93	150.00	29.00	30.00	14.00	-	71.00	40.00	6.00	180.0/40464	198.0	5.69
*P 150F 98	150.00	46.00	70.00	30.00	-	153.00	80.00	12.00	600.0/134880	660.0	28.45
R F 10150-S	150.00	29.00	30.00	14.50	-	69.00	38.10	6.30	102.5/23295	112.7	6.00
P 150.5	150.50	38.12	40.81	16.02	83.50	88.00	44.23	8.50	250.0/56817	275.0	10.00
P 152F 5	152.40	66.70	25.40	26.90	59.20	80.00	50.00	7.10/5.10	134.0/30454	147.4	12.10
P 152F 10	152.40	57.20	37.10	15.90	76.80	87.00	44.50	7.90	190.0/43181	209.0	11.29
P 152F 28	152.40	88.90	38.00	31.80	82.00	89.00	61.00	8.90/7.60	200.0/44961	220.0	23.30
P 152F 35	152.40	88.90	38.00	23.00	82.00	87.05	61.00	8.90/7.60	266.7/60000	293.4	22.65
P 152F 37	152.40	66.70	25.40	26.92	64.00	83.50	50.80	7.80/6.50	120.0/27000	132.0	12.22
P 152F 39	152.40	47.60	19.00	19.00	53.60	58.00	38.10	6.30	120.0/27000	132.0	6.26
P 152F 42	152.40	63.50	34.90	19.00	-	93.00	50.80	9.50	152.0/34194	168.9	15.80
P 152F 49	152.40	63.50	34.00	15.60	-	82.00	65.00	8.00	160.0/35993	176.0	16.30
P 152F 67	152.40	88.90	101.00	47.63	-	228.70	114.30	22.00	1350.0/303696	1445.0	101.30
P 152F 100	152.40	69.90	38.80	19.00	-	95.50	50.80	9.50	152.0/34194	168.9	17.76
P 152F 136	152.40	36.00	37.00	18.00	-	79.50	50.00	8.00	280.0/62946	308.0	10.00
P 152F 173	152.40	88.90	80.90	45.00	-	205.00	127.00	22.00	1810.0/406888	1991.0	105.00
*P 152F 210	152.40	32.00	26.00	24.00	62.40	72.00	51.00	7.00	180.0/40464	198.0	9.10
P 152F 52-BRSS	152.40	50.80	28.50	11.10	-	66.60	31.80	6.40	70.0/15736	80.0	6.70
*P 154F 1	154.00	44.50	85.60	28.60	-	150.00	80.00	12.50	500.0/112480	550.0	31.00
P 155F 1	155.00	55.00	35.00	20.00	74.00	81.30	48.00	8.00	180.0/40464	198.0	11.82
P 160F 15	160.00	64.00	37.00	15.00	-	100.40	45.00	8.50	160.0/35993	176.0	13.10
P 160F 16	160.00	69.85	38.10	27.00	-	101.00	50.80	9.00/8.00	267.0/60064	296.4	16.60


*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

输送链 Conveyor chains

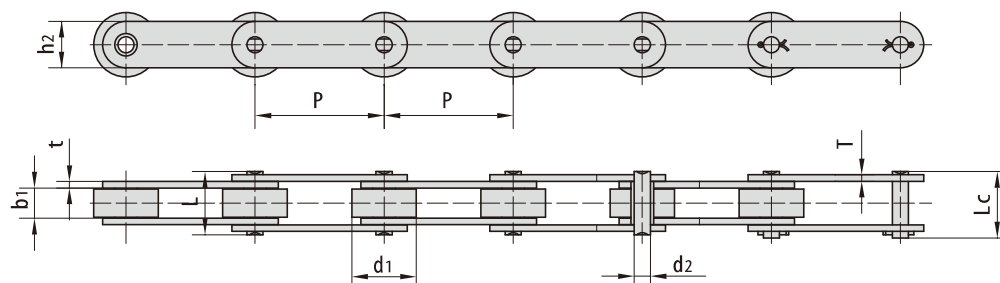


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	t/T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 160F27	160.00	69.85	38.10	17.53	-	81.00	50.80	6.30	244.0/54890	268.4	13.68
P 160F48	160.00	30.00	39.00	15.90	-	88.00	50.00	8.00	200.0/44962	220.0	9.72
P 160F85	160.00	25.00	35.30	12.70	68.40	73.00	40.00	6.40	169.0/37993	185.9	5.76
P 177.8F6	177.80	88.90	81.00	44.45	-	218.50	127.00	25.00	1710.0/384408	1881.0	105.50
P 200F10	200.00	100.00	47.00	25.00	-	103.50	72.00	10.00	308.7/69445	339.6	28.30
P 200F15	200.00	40.10	51.40	19.10	-	109.50	50.80	9.50	213.0/47916	236.4	12.58
P 200F58	200.00	44.00	44.00	19.10	-	91.50	50.80	7.00	200.0/44961	230.0	9.82
P 200F86	200.00	80.00	41.00	30.00	-	129.00	60.00	16.00	300.0/67443	330.0	28.53
P 203.2F18	203.20	66.70	26.00	26.90	60.50	65.50	50.00	7.00/5.00	156.0/35069	171.6	10.00
P 203.2F20	203.20	66.70	25.40	27.00	63.50	92.00	50.00	8.00/6.00	156.0/35069	171.6	13.00
P 228.6F9	228.60	107.95	77.70	31.75	-	173.60	88.90	16.00	598.0/134526	657.0	56.70
P 250F36	250.00	100.00	57.20	22.23	-	117.00	63.50	9.50	314.0/70637	348.5	25.70
P 250F39	250.00	44.00	44.00	19.00	-	92.00	50.00	7.00	200.0/44961	242.0	8.92
P 250F79	250.00	57.20	66.70	25.40	-	146.00	76.20	12.70	619.0/139151	681.0	24.74
P 250F85	250.00	64.80	37.00	16.00	-	84.50	45.00	8.00	160.0/35968	176.0	10.12

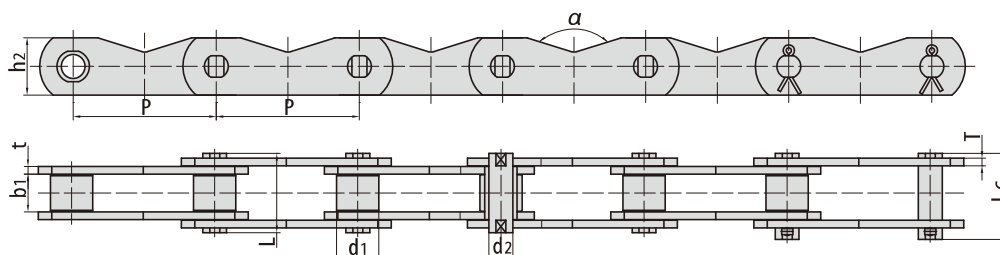

东华链号 Donghua Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度		链板尺寸			抗拉强度	平均抗拉强度	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate dimension			Tensile strength	Average tensile strength	Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	t/T _{max}	α	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm		kN/bf	kN	kg/m
P 31.75F11	31.75	19.05	9.40	5.08	20.70	23.30	19.00	2.00	—	21.80/4900	25.00	1.55
P 76.2F60	76.20	40.00	25.40	12.00	52.70	55.80	43.00	5.6/4.8	142.92°	161.00/39413	177.10	7.90
P 150F100	150.00	48.00	39.50	25.00	83.80	91.00	60.00	8.00	145.00°	400.00/89920	440.00	13.90
P 160F73	160.00	70.00	38.00	20.00	75.00	86.00	70.00	7.20	—	150.00/33723	165.00	17.20

带附板输送链

Conveyor chains with attachments

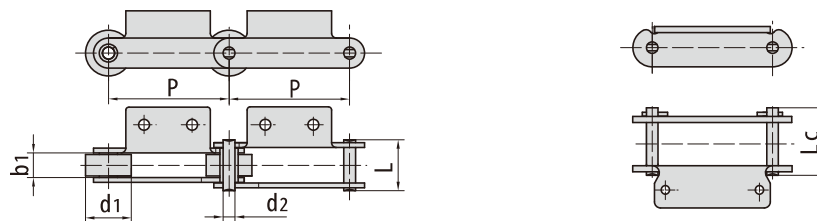


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 13.7K 1	13.700	8.51	7.75	4.450	16.70	19.30	17.8/4000	20.00	0.79
P 14.85K 1	14.850	10.16	9.40	5.080	20.70	23.30	20.0/4496	22.00	1.34
P 16.7F1K 1	16.700	10.16	9.40	5.080	20.70	23.30	21.8/4900	24.00	1.50
*P 28	28.575	11.68	16.00	7.870	-	32.40	50.0/11240	55.00	2.66
*P 28F1	28.575	11.68	16.13	7.870	-	32.40	50.0/11240	55.00	2.60
P 36.67A 2	36.670	11.91	12.57	5.940	25.90	28.30	31.8/7149	34.98	1.26
P 38F10K 1	38.000	15.88	13.00	8.280	32.50	35.50	55.0/12364	60.50	2.60
P 38F11K 1	38.000	15.88	13.00	8.280	30.50	33.50	45.0/10116	49.50	2.30
P 38F13K 1	38.000	15.88	13.00	8.280	32.50	35.50	55.0/12364	60.50	2.60
P 38.1F 2	38.100	22.50	13.00	8.000	29.50	33.30	40.0/8992	44.00	2.42
P 38.1F 25A 1	38.100	18.00	15.00	8.280	36.10	39.10	68.0/15287	75.00	3.00
P 38.1F 25A 2	38.100	23.80	15.00	8.280	36.10	39.10	68.0/15286	74.80	3.38
P 38.1F 31	38.100	15.88	15.75	7.920	36.20	38.90	55.0/12364	60.50	3.46
P 38.1F 32	38.100	15.88	15.75	7.920	36.20	38.90	55.0/12364	60.50	3.38
P 39.75A 1	39.750	17.25	22.00	7.800	40.50	44.30	47.0/10566	51.70	3.10
P 39.75A 2F 2	39.750	22.23	13.00	5.940	29.20	31.00	32.0/7194	35.20	2.23
P 40F12A 2	40.000	22.23	13.00	5.940	29.20	31.00	32.0/7194	35.20	2.23
P 41.3F9A 2	41.300	22.00	11.00	9.000	28.60	31.60	40.0/8992	44.00	2.30
P 41.3F14A 2	41.275	22.22	12.70	5.940	29.20	31.60	30.0/6744	33.00	2.22
P 42F 2	42.000	11.00	13.00	6.000	30.00	32.50	50.0/11240	55.00	1.85
P 42F13A 1	42.010	22.23	25.40	9.530	48.50	-	55.0/12364	60.50	4.60
P 42.5	42.500	15.88	15.75	7.920	32.70	36.50	56.7/12746	62.00	3.40
P 44F3A 2	44.000	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.32
P 44.45F 5	44.450	25.40	16.51	7.920	36.20	38.90	35.0/7874	38.50	3.85
P 44.45F7A 1	44.450	28.58	15.00	9.530	34.50	38.70	45.0/10116	49.50	3.80
P 44.45F12K 2	44.450	25.40	25.40	12.700	54.40	59.00	170.0/38216	187.00	7.84
P 44.45F15K 2	44.450	25.40	25.40	12.700	60.00	-	170.0/38216	187.00	8.34
P 46	46.000	16.00	16.00	8.000	36.00	39.00	55.0/12364	60.50	3.23
P 49F2A 1	49.000	31.00	23.00	9.800	36.60	42.00	40.0/8992	44.00	5.51
P 50F3A 1	50.000	31.00	15.00	9.530	35.40	38.65	83.0/18659	91.30	4.77
P 50F16	50.000	24.90	10.07	7.800	26.60	28.80	30.0/7418	36.30	2.22
P 50F27A 1	50.000	31.00	15.00	9.800	36.60	42.00	40.0/8992	44.00	5.30
P 50F42A 1	50.000	29.00	15.00	9.800	36.60	42.00	40.0/8992	44.00	4.03
P 50F53A 2	50.000	31.00	15.50	10.000	37.10	40.00	40.0/8992	44.00	4.00

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

带附板输送链 Conveyor chains with attachments

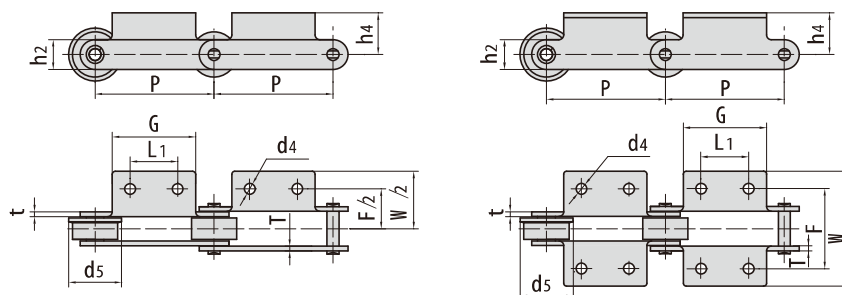


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 13.7K 1	13.700	△	9.50	29.00	38.70	7.10	11.80	4.50	1.60	-
P 14.85K 1	14.850	△	14.85	30.00	38.00	10.00	14.50	3.50	2.03	-
P 16.7F1K 1	16.700	△	12.70	31.80	44.60	10.30	14.60	5.20	2.03	-
P 28	28.575	28.58	51.00	46.74	61.20	13.70	22.23	8.75	3.10	-
P 28F 1	28.575	28.58	50.80	46.80	61.86	12.70	22.23	9.02	3.10	-
P 36.67A 2	36.670	14.30	28.60	42.90	67.80	14.70	18.00	5.50	2.42	-
P 38F10K 1	38.000	△	30.00	49.00	79.00	16.50	21.00	8.40	3.50	-
P 38F11K 1	38.000	△	30.00	47.00	77.00	16.50	21.00	8.40	3.00	-
P 38F13K 1	38.000	△	30.00	49.00	79.00	16.50	16.50	7.00	3.50	-
P 38.1F 2	38.100	△	28.00	56.00	76.00	17.20	19.00	9.00	3.00	-
P 38.1F 25A 1	38.100	△	28.00	51.00	71.00	15.00	21.00	8.40	4.00	-
P 38.1F 25A 2	38.100	50.00	70.00	48.00	68.00	15.00	21.00	7.00	4.00	-
P 38.1F 31	38.100	△	61.10	54.20	81.60	14.70	23.00	8.20	4.00	-
P 38.1F 32	38.100	△	61.10	61.00	81.60	14.70	23.00	10.20	4.00	-
P 39.75A 1	39.750	△	61.00	62.10	94.10	16.50	21.25	11×8	3.50	-
P 39.75A 2F 2	39.750	14.30	28.60	42.40	57.20	14.70	17.00	5.20	3.10	-
P 40F 12A 2	40.000	14.30	28.60	42.90	57.20	14.70	17.00	5.20	3.10	-
P 41.3F 9A 2	41.300	12.00	24.00	36.20	48.20	17.00	21.00	5.50	3.00	-
P 41.3F 14A 2	41.275	14.30	28.60	42.90	61.20	14.70	17.50	5.20	3.25	-
P 42F 2	42.000	△	35.00	40.00	76.00	12.80	17.00	6.00	3.00	-
P 42F 13A 1	42.010	△	31.75	60.00	84.20	18.00	28.58	8.26×16	3.25	-
P 42.5	42.500	19.00	38.00	53.50	70.00	19.50	22.00	7.00	3.25	-
P 44F 3A 2	44.000	26.00	44.00	50.80	68.00	19.10	21.00	6.60	4.15/3.10	-
P 44.45F 5	44.450	△	34.93	57.16	74.46	19.05	19.05	8.00	3.80	-
P 44.45F 7A 1	44.450	△	22.00	66.00	84.80	12.80	25.60	7.00	3.00	-
P 44.45F 12K 2	44.450	42.00	82.00	69.00	97.30	25.00	36.80	10.80	6.00/5.00	-
P 44.45F 15K 2	44.450	42.00	82.00	69.00	97.30	25.00	36.80	10.80	6.00/5.00	-
P 46	46.000	△	38.00	54.00	82.80	18.00	22.00	6.00	4.00	-
P 49F 2A 1	49.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P 50F 3A 1	50.000	△	60.00	63.00	98.00	19.10	25.00	10.00	4.00	-
P 50F 16	50.000	△	41.30	45.00	61.40	36.00	20.00	6.50	3.00	-
P 50F 27A 1	50.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P 50F 42A 1	50.000	△	29.00	55.00	72.00	12.50	25.00	7.00	4.00	-
P 50F 53A 2	50.000	20.00	40.00	58.40	74.40	21.00	25.00	8.20	4.00	-

△附板带一个孔

△Attachments with 1 hole

带附板输送链

Conveyor chains with attachments

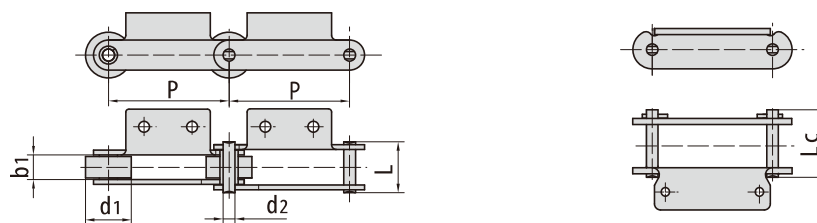


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 50.8F22A1-F	50.80	32.00	15.00	11.700	39.00	43.00	50.0/11240	55.00	6.13
P 50.8F35A1	50.80	25.00	12.57	5.940	25.90	29.00	31.8/7150	35.00	2.20
P 50.8F40	50.80	28.60	30.60	10.190	57.00	62.00	70.0/15736	77.00	7.55
P 50.8F65K1	50.80	16.00	17.00	8.000	37.60	40.70	56.7/12746	62.37	3.90
P 58F2A2	58.00	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.46
P 60A2F16	60.00	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.48
P 62.5A3F1	62.50	48.00	25.00	14.000	53.40	57.50	90.0/20232	99.00	10.60
P 63F30K1	63.00	42.00	24.00	10.000	46.00	49.50	85.0/19108	93.50	7.67
P 68.25F1	68.25	30.00	15.00	14.000	40.30	44.70	70.0/15736	77.00	4.19
P 69F4A1	69.00	30.00	12.50	9.530	30.00	34.00	45.0/10116	50.00	3.18
P 69F5A1	69.00	25.00	11.50	5.720	28.00	30.20	18.0/4046	19.80	2.38
P 70F29	70.00	40.00	19.00	10.000	37.10	41.00	57.0/12814	62.70	4.84
P 75F6	75.00	16.00	16.00	8.000	-	41.00	32.0/7200	35.20	2.44
P 75F8A2	75.00	31.80	16.00	8.000	-	41.00	32.0/7200	35.20	3.52
P 75F8A2-F	75.00	30.00	16.00	8.000	-	41.00	32.0/7200	35.20	3.80
P 75F20A1	75.00	40.00	22.00	12.000	47.0	52.00	90.0/20232	99.00	6.81
P 75F23	75.00	28.00	24.40	11.100	-	61.50	140.0/31473	154.00	4.49
P 75F27A2	75.00	45.00	22.00	11.000	-	51.40	62.3/14005	68.00	7.43
P 75F34A1	75.00	40.00	22.00	12.000	47.00	52.00	90.0/20232	99.00	6.71
P 75F34A2	75.00	40.00	22.00	12.000	47.00	52.00	75.0/16860	82.50	6.86
P 75F38K2	75.00	22.20	22.00	11.300	-	53.50	62.7/14095	69.00	4.70
P 75F56A1	75.00	38.00	22.00	12.000	47.00	52.00	90.0/20232	99.00	6.04
P 75F57A2	75.00	15.75	16.00	8.000	-	41.00	32.0/7194	35.20	1.82
P 75F63A2	75.00	40.00	21.50	12.000	45.70	49.00	100.0/22480	110.00	6.20
*P 76F1K1	76.00	32.00	35.00	16.000	-	77.00	240.0/53954	265.00	12.10
P 76.2F1	76.20	31.75	15.00	14.200	-	44.20	60.0/13488	66.00	4.45
P 76.2F41K1	76.20	38.10	25.40	11.100	-	57.50	80.0/17984	88.00	7.40
P 76.2F42K1	76.20	38.10	25.40	11.100	-	60.70	120.0/26977	132.00	7.94
P 76.2F14A3	76.20	38.10	25.40	11.100	-	56.50	85.0/19108	93.50	6.10
P 76.2F43	76.20	31.74	15.88	7.940	33.10	36.20	54.5/12252	59.95	3.28
P 76.2F69A2	76.20	40.00	32.00	12.500	57.90	62.30	100.0/22480	110.00	9.21
P 78F2K2	78.00	32.00	37.00	15.000	-	83.20	210.0/47208	231.00	10.90
P 78F3K2	78.00	32.00	37.00	18.000	-	94.00	350.0/78680	385.00	15.90
P 78.1F5K2	78.10	31.75	38.10	16.460	-	95.00	250.0/56200	275.00	14.50

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

带附板输送链

Conveyor chains with attachments

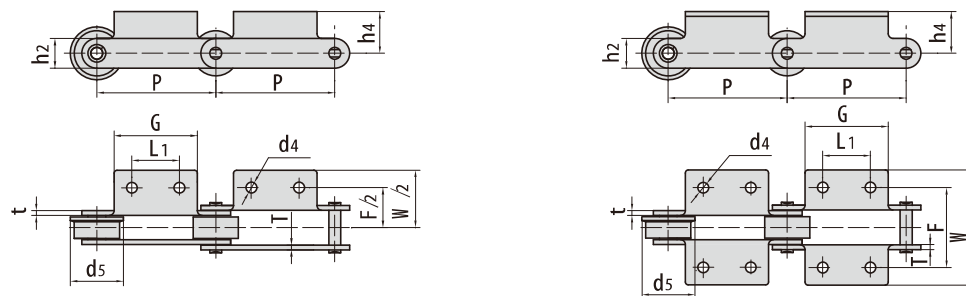


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P50.8F22A1-F	50.80	△	45.00	75.00	110.40	20.00	26.40	9.00	4.50	40.00
P50.8F35A1	50.80	△	48.00	46.00	68.00	26.00	18.00	8.00	2.50	-
P50.8F40	50.80	-	40.00	-	90.00	22.50	30.00	-	4.50	-
P50.8F65K1	50.80	△	30.00	55.60	84.00	16.00	25.00	8.70	4.00	-
P58F2A2	58.00	26.00	44.00	66.80	84.00	19.10	21.00	6.60	4.15/3.10	-
P60A2F16	60.00	26.00	44.00	66.80	84.00	19.10	21.00	6.60	4.15/3.10	-
P62.5A3F1	62.50	40.00	65.00	90.00	130.00	26.00	35.00	11.00	5.00	-
P63F30K1	63.00	△	22.00	88.00	112.00	30.00	31.00	10.00	4.00	-
P68.25F1	68.25	40.00	70.00	54.00	84.00	21.50	27.00	8.40	4.50	-
P69F4A1	69.00	△	60.00	60.00	80.00	27.00	25.00	9.00	3.00	-
P69F5A1	69.00	△	66.00	48.00	68.00	27.00	15.00	6.50	3.00	-
P70F29	70.00	△	34.00	60.00	87.00	15.00	30.00	10.30	3.00	-
P75F6	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.00	-
P75F8A2	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	-
P75F8A2-F	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	38.00
P75F20A1	75.00	△	55.00	64.00	92.00	25.00	32.00	M 8	4.50	50.00
P75F23	75.00	40.00	60.00	88.00	118.00	37.00	30.00	9.00	6.00	-
P75F27A2	75.00	35.00	60.00	70.00	110.90	22.00	32.00	10.00	4.50/4.00	-
P75F34A1	75.00	△	55.00	70.00	90.00	25.00	32.00	M 8	4.50	50.00
P75F34A2	75.00	30.00	56.00	62.40	102.40	22.00	32.00	M 5	4.50	50.00
P75F38K2	75.00	30.00	55.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P75F56A1	75.00	△	45.00	69.00	99.00	25.00	32.00	9.00	4.50	45.00
P75F57A2	75.00	30.00	55.00	66.00	98.00	19.58	22.00	10.00	3.20	-
P75F63A2	75.00	25.00	55.50	71.20	94.00	22.00	32.00	M 8	4.00	-
P76F1K1	76.00	△	50.00	109.20	149.20	35.00	50.00	11.00	6.00	-
P76.2F1	76.20	31.00	58.00	75.40	107.00	21.25	29.00	10.50	4.50	-
P76.2F41K1	76.20	△	51.00	75.00	100.00	39.55	30.20	8.60	4.80	-
P76.2F42K1	76.20	△	50.80	74.60	101.60	20.60	28.60	8.70	4.80/6.40	-
P76.2F14A3	76.20	28.60	50.80	76.20	104.60	19.10	28.60	6.40	4.80	-
P76.2F43	76.20	25.40	56.00	70.00	98.00	18.00	25.40	8.50	3.15	-
P76.2F69A2	76.20	43.00	67.40	98.20	117.00	22.70	32.80	8.80	5.00	50.00
P78F2K2	78.00	30.00	65.00	120.00	150.00	32.00	38.10	13.00	8.00	-
P78F3K2	78.00	30.00	65.00	120.00	150.00	34.00	46.00	13.00	10.00	-
P78.1F5K2	78.10	46.00	72.00	89.40	128.00	35.00	39.60	12.00	9.70	-

△附板带一个孔
△Attachments with 1 hole

带附板输送链



Conveyor chains with attachments

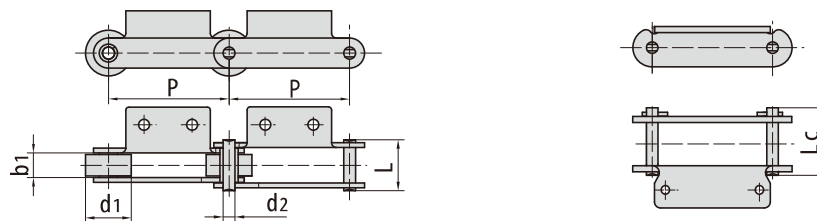

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 78.11F8	78.11	31.80	37.10	15.000	—	83.50	100.0/22480	110.00	12.05
P 78.11F9	78.11	31.75	38.10	15.875	—	90.00	90.0/20232	99.00	11.28
P 80F4	80.00	30.00	15.00	13.900	42.50	46.50	86.0/19333	95.00	3.97
P 80F4-P	80.00	45.00	15.00	13.900	42.50	46.50	86.0/19333	94.60	5.67
P 80F63A2	80.00	30.00	20.00	11.000	47.90	52.00	86.0/19333	94.60	5.30
P 85A2F1	85.00	44.45	16.00	10.000	—	56.60	90.0/20232	100.00	6.80
P 90F5A2	90.00	31.80	16.10	8.000	—	41.00	32.0/7193	35.00	2.86
P 90F8A2-G K	90.00	45.00	37.00	12.700	69.10	74.00	140.0/31472	154.00	11.90
P 95F1A2	95.00	30.00	23.00	10.000	45.50	49.50	60.0/13488	66.00	3.79
P 97.5F1	97.50	50.00	24.00	15.000	—	52.00	100.0/22480	110.00	6.51
P 100A2-F1	100.00	50.00	29.90	14.000	—	61.00	150.0/33721	165.00	9.20
P 100F1	100.00	42.00	23.00	9.530	52.00	54.30	86.7/19704	95.00	6.06
P 100F2	100.00	36.00	18.00	9.530	47.00	49.30	86.7/19704	95.00	4.60
P 100F2A2	100.00	42.00	18.00	9.530	47.00	49.30	86.7/19490	95.37	5.33
P 100F3	100.00	29.00	30.00	14.500	—	71.00	95.0/21356	105.00	9.46
P 100F4	100.00	40.00	22.00	11.300	—	53.50	65.0/14612	72.00	5.13
P 100F5	100.00	22.20	22.00	11.300	—	53.50	65.0/14612	72.00	3.90
P 100F12	100.00	45.00	37.00	12.000	64.00	67.00	150.0/33721	165.00	10.30
P 100F15	100.00	38.00	25.80	10.700	—	57.00	45.0/10116	50.00	5.25
P 100F16A2-F	100.00	31.80	16.10	8.000	34.80	35.50	55.0/12364	60.50	2.68
P 100F33	100.00	40.00	27.00	11.300	—	64.80	100.0/22480	110.00	6.80
P 100F41A2	100.00	45.00	25.40	12.700	—	63.80	80.0/17984	88.00	8.26
P 100F50	100.00	36.00	29.00	15.000	70.00	76.00	200.0/44992	220.00	13.93
P 100F75	100.00	26.00	22.00	10.700	—	55.00	45.0/10116	50.00	4.75
P 100F82A1	100.00	31.80	16.10	8.000	—	41.00	32.0/7193	35.20	3.07
P 100F93	100.00	40.00	22.00	11.300	—	59.50	86.0/19333	94.60	8.07
P 100F94K1	100.00	47.60	26.00	27.000	61.00	70.00	160.0/35993	176.00	12.90
P 100F95A2	100.00	32.00	14.00	11.100	32.50	36.00	60.0/13488	66.00	3.11
P 100F99K2	100.00	40.00	22.00	11.100	48.40	53.40	65.0/14612	71.50	5.54
P 100F104	100.00	40.00	22.00	11.300	—	60.70	146.0/32822	160.60	7.33
P 100F108K2	100.00	40.00	22.00	11.300	—	53.50	65.0/14612	71.50	5.80
P 100F109A2	100.00	45.00	21.00	14.000	48.00	53.00	50.0/11240	55.00	6.94

带附板输送链

Conveyor chains with attachments

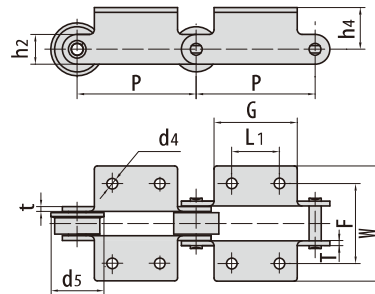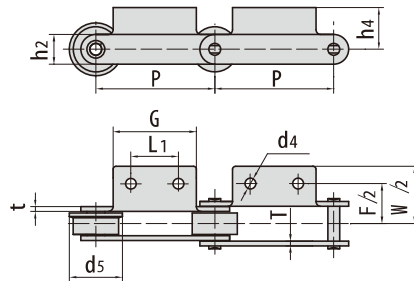


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P78.11F8	78.11	30.00	65.00	120.00	150.00	35.00	38.10	12.00	7.90	-
P78.11F9	78.11	38.10	116.60	104.60	133.30	31.75	38.10	14.30	7.90	-
P80F4	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	-
P80F4-P	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	-
P80F63A2	80.00	40.00	70.20	62.40	92.40	22.95	27.10	8.50	5.60/4.15	40.00
P85A2F1	85.00	30.00	50.40	95.00	125.00	22.50	35.00	9.00	4.80	-
P90F5A2	90.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P90F8A2-G K	90.00	40.00	75.00	96.00	118.00	44.50	38.00	11.00	6.00	-
P95F1A2	95.00	40.00	65.00	66.40	96.40	22.50	25.00	8.50	4.00	40.00
P97.5F1	97.50	-	50.00	-	130.00	35.00	35.00	-	4.00	-
P100A2-F1	100.00	40.00	65.00	98.00	128.00	35.00	40.00	10.00	4.00	65.00
P100F1	100.00	78.00	96.00	73.00	103.00	17.50	32.00	7.00	5.00	-
P100F2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	-
P100F2A2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	-
P100F3	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	-
P100F4	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P100F5	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P100F12	100.00	60.00	90.00	98.00	128.00	34.00	40.00	11.50	5.00	64.00
P100F15	100.00	29.85	65.00	75.00	115.60	20.00	28.00	9.00	4.80	-
P100F16A2-F	100.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P100F33	100.00	40.00	65.00	78.30	102.30	24.30	32.00	10.00	6.00	50.00
P100F41A2	100.00	40.00	70.00	80.00	126.00	25.00	31.80	12.00	6.30	60.00
P100F50	100.00	40.00	70.00	156.00	196.00	43.00	60.00	9.00	8.00	-
P100F75	100.00	29.85	65.00	68.00	112.00	20.00	28.00	12×9	4.80	-
P100F82A1	100.00	△	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P100F93	100.00	40.00	70.00	100.00	124.00	30.00	32.00	100.00	6.00	-
P100F94K1	100.00	△	35.00	85.00	116.00	38.50	55.00	13.00	7.00/5.00	-
P100F95A2	100.00	30.00	51.00	76.00	104.00	18.00	30.00	9.00	3.00	-
P100F99K2	100.00	40.00	65.00	70.00	104.00	22.00	32.00	9.50	4.80	-
P100F104	100.00	40.00	65.00	70.00	104.00	23.60	32.00	10.00	6.30	-
P100F108K2	100.00	40.00	65.00	70.00	94.00	35.00	32.00	10.00	4.50	-
P100F109A2	100.00	40.00	60.00	110.00	130.00	17.50	35.00	6.40	5.00	-

△附板带一个孔

△Attachments with 1 hole

带附板输送链

Conveyor chains with attachments

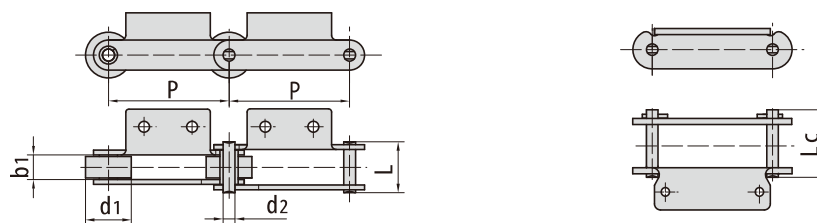


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
*P100F128K2	100.00	32.00	45.00	16.000	-	95.00	240/53954	276.00	13.50
P100F143	100.00	40.00	24.00	11.300	-	53.50	65.0/14612	72.00	5.73
P100F148A2-F	100.00	38.00	20.50	9.530	43.60	47.90	38.0/8540	43.00	3.93
P100F101A2	100.00	22.20	24.00	11.100	57.50	62.70	70.0/15736	77.00	5.50
P100F175A2	100.00	49.00	30.00	14.500	-	71.00	112.0/25178	123.20	-
P100F226K2	100.00	31.00	14.50	10.000	37.50	41.50	80.0/17984	88.00	3.00
P100F233A2	100.00	30.00	32.00	14.000	-	72.50	190.0/42712	209.00	7.65
P100F237A3	100.00	40.00	33.00	10.000	56.00	61.00	85.0/19108	93.50	6.68
P100F241K2	100.00	25.00	31.00	12.000	-	65.00	80.0/17984	88.00	7.52
P100F251K2	100.00	29.00	30.00	14.500	-	71.00	79.0/17759	86.90	7.30
P100F264A2	100.00	40.00	27.00	11.300	-	64.50	65.0/14612	71.50	7.12
P100F277A2	100.00	45.00	21.00	21.000	-	60.00	120.0/26976	132.00	7.32
P100F281A1	100.00	40.00	24.00	12.000	47.80	54.80	75.0/16860	82.50	6.40
RF10100K2	100.00	50.80	30.00	14.500	-	69.00	102.7/23087	113.00	12.60
P100F148A2-F	100.00	44.50	20.50	9.530	43.60	47.90	38.0/8542	41.80	3.93
P100F331A2	100.00	28.58	20.50	10.000	42.30	46.10	56.0/12589	61.60	4.10
P100F356A2-F	100.00	50.00	37.00	14.000	61.80	66.00	105.0/23604	115.50	10.20
*P101.6F1	101.60	25.00	55.00	16.000	-	110.00	60.0/13488	66.00	11.90
P101.6F2A2F1	101.60	47.60	18.20	19.100	-	53.50	97.8/22000	107.58	7.16
P101.6F9	101.60	31.75	15.00	14.200	-	44.20	66.7/15159	73.00	8.40
*P101.6F17K2	101.60	25.40	55.60	15.880	-	115.00	180.0/40492	198.00	12.40
*P101.6F17K2F1	101.60	25.40	55.60	15.880	-	115.00	180.0/40464	198.00	11.92
P101.6F18A1	101.60	31.75	15.00	10.000	37.00	41.00	56.0/12589	61.00	3.63
*P101.6F18A2	101.60	31.75	15.00	10.000	37.00	41.00	40.0/8992	44.00	3.66
P101.6F21	101.60	38.10	53.80	15.875	-	112.20	180.0/40492	198.00	14.90
P101.6F25	101.60	36.50	50.80	19.050	-	112.00	200.0/44992	220.00	18.10
P101.6F30A2	101.60	38.00	22.00	10.000	-	52.80	100.0/22480	110.00	5.19
P101.6F35	101.60	66.70	25.00	25.400	61.00	66.00	160.0/35993	176.00	15.73
P101.6F36	101.60	57.15	33.40	15.880	-	92.00	180.0/40492	198.00	14.33
P101.6F39	101.60	57.15	33.30	16.000	82.00	89.00	127.0/28550	140.00	17.70
P101.6F39K1F1	101.60	57.15	33.30	16.000	82.00	89.00	127.0/28550	140.00	16.60
P101.6F40A2	101.60	38.10	21.00	10.000	-	52.00	50.0/11240	55.00	4.69
P101.6F41K1	101.60	44.50	27.00	11.300	-	67.00	78.0/17546	86.00	10.20
P101.6F43A2	101.60	50.00	16.00	16.000	49.00	53.50	145.0/32620	160.00	7.95

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

带附板输送链

Conveyor chains with attachments

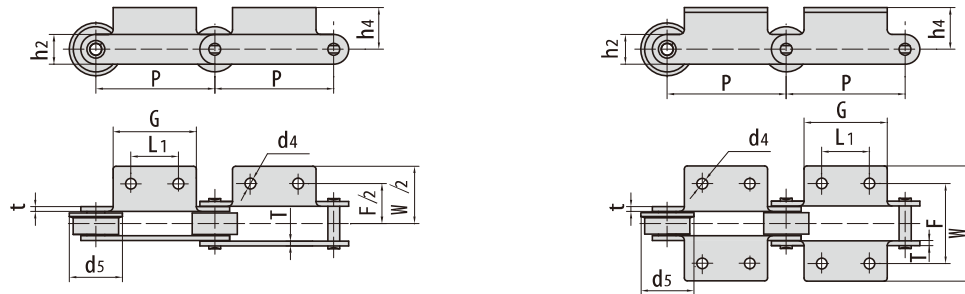


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 100F128K2	100.00	30.00	61.00	123.20	163.50	35.00	50.00	13.00	8.00	—
P 100F143	100.00	40.00	65.00	70.00	100.00	35.00	32.00	11.00	4.00	50.00
P 100F148A2-F	100.00	50.00	70.00	72.00	104.00	37.00	21.00	9.00	4.00	44.50
P 100F101A2	100.00	41.00	65.00	86.00	134.00	24.50	33.00	9.00	6.00	—
P 100F175A2	100.00	40.00	70.00	100.00	128.00	28.00	38.10	M 8	6.00	—
P 100F226K2	100.00	35.00	70.00	65.00	98.00	35.00	25.00	9.00	4.50/4.00	—
P 100F233A2	100.00	40.00	70.00	80.00	112.00	31.00	40.00	10.50	6.00	—
P 100F237A3	100.00	56.00	100.00	108.00	144.00	31.00	32.00	12.00	4.00	—
P 100F241K2	100.00	50.00	90.00	100.00	132.00	35.00	42.00	12.00	5.00	—
P 100F251K2	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	—
P 100F264A2	100.00	40.00	65.00	75.00	99.00	22.00	32.00	10.00	6.00	—
P 100F277A2	100.00	40.00	80.00	70.00	110.00	31.50	35.00	13.00	6.00	—
P 100F281A1	100.00	△	76.00	77.00	140.00	26.00	36.00	16.60	4.00	—
R F10100K2	100.00	40.00	70.00	100.00	126.00	28.00	38.10	12.00	6.30	—
P 100F148A2-F	100.00	50.00	70.00	72.00	104.00	37.00	21.00	9.00	4.00	—
P 100F331A2	100.00	50.00	70.00	71.50	91.50	35.00	25.00	9.00	4.00	—
P 100F356A2-F	100.00	40.00	65.00	105.00	135.00	35.00	40.00	M 8	4.00	64.00
P 101.6F1	101.60	44.00	73.00	136.00	165.00	30.00	40.00	11.00	10.00	—
P 101.6F2A2F1	101.60	40.00	65.00	70.00	94.00	22.00	38.10	10.00	5.00	—
P 101.6F9	101.60	31.00	65.00	75.40	107.00	21.25	29.00	10.50	4.50	—
P 101.6F17K2	101.60	44.50	84.00	136.00	172.00	25.40	38.00	11.00	10.00	—
P 101.6F17K2F1	101.60	44.50	78.00	135.00	172.00	25.40	38.00	11.00	10.00	—
P 101.6F18A1	101.60	△	60.00	76.00	124.00	19.00	25.00	10.60	4.00	—
P 101.6F18A2	101.60	30.00	60.00	76.00	124.00	19.00	25.00	10.50	4.00	—
P 101.6F21	101.60	44.50	141.20	134.90	177.80	28.70	38.10	14.00	9.65	—
P 101.6F25	101.60	44.45	152.40	140.70	171.60	41.28	44.45	13.50	9.50	—
P 101.6F30A2	101.60	40.00	70.00	80.00	107.00	22.00	30.00	11.50	5.00	—
P 101.6F35	101.60	50.00	70.00	107.00	127.00	40.00	51.00	10.00	6.00	—
P 101.6F36	101.60	△	50.80	98.40	142.90	32.00	38.10	14.30	9.50	—
P 101.6F39	101.60	△	50.80	101.60	146.40	31.75	38.10	14.20	9.65	—
P 101.6F39K1F1	101.60	△	38.10	101.60	138.20	33.30	38.10	14.20	9.65	—
P 101.6F40A2	101.60	40.00	70.00	80.00	108.00	22.00	25.00	12.00	5.00	—
P 101.6F41K1	101.60	△	70.00	100.00	128.00	28.00	28.60	12.00	6.30	—
P 101.6F43A2	101.60	32.00	56.00	80.00	112.00	20.00	40.00	9.50	6.00	—

△附板带一个孔
△Attachments with 1 hole

带附板输送链


Conveyor chains with attachments

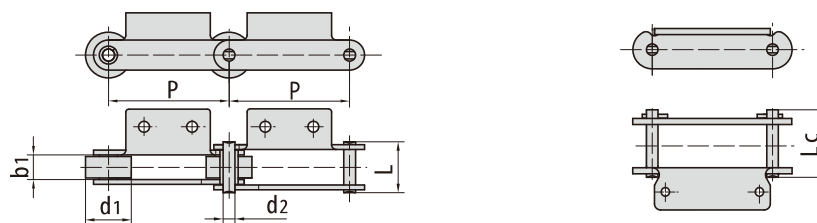

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 in}	d _{2 max}	L _{max}	L _{c max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 101.6F54K 1	101.60	57.15	33.30	16.000	—	89.00	177.8/39998	197.40	17.86
P 101.6F56K 2	101.60	32.00	54.50	16.000	—	115.00	180.0/40493	199.80	16.51
P 101.6F57K 3	101.60	57.15	31.75	15.900	—	67.40	166.0/37343	191.20	13.90
P 101.6F62K 1	101.60	57.15	33.30	16.000	—	89.00	177.8/39998	197.40	18.83
P 101.6F69K 3	101.60	38.10	23.80	12.700	—	65.10	100.0/22480	110.80	8.34
P 101.6F76	101.60	57.15	31.56	16.000	56.20	62.00	82.6/18582	91.70	11.57
P 101.6F80A 2	101.60	44.50	31.60	15.900	—	81.00	130.0/29245	144.30	11.36
P 101.6F84A 2	101.60	50.80	30.23	11.180	—	62.00	80.36/18078	89.20	9.04
P 101.6F88	101.60	57.15	31.00	15.880	—	89.00	140.0/31473	160.00	18.40
P 101.6F91A 1	101.60	38.10	21.00	9.700	—	52.50	50.0/11240	55.00	5.30
P 101.6F95K 2	101.60	28.60	27.60	12.700	—	67.00	120.0/26977	132.00	6.65
P 101.6F97K 1	101.60	44.45	33.27	15.880	—	82.60	113.2/25448	125.00	13.77
P 101.6F98K 2	101.60	47.60	19.00	12.000	—	53.00	100.0/22480	110.00	6.60
P 101.6F101K 1	101.60	57.15	33.30	16.000	—	89.00	114.0/25628	125.00	17.70
P 101.6F115A 2	101.60	31.75	15.00	14.200	—	44.20	66.7/14994	73.37	4.42
P 101.6F117A 2	101.60	50.00	16.00	16.000	49.00	53.50	145.0/32596	159.50	8.27
P 101.6F121A 1	101.60	38.10	22.60	10.000	49.80	53.60	50.0/11240	55.00	5.33
P 101.6F123K 1	101.60	28.58	30.00	14.270	—	70.10	158.0/35518	173.80	8.35
P 101.6F128K 3	101.60	57.00	32.00	15.900	66.80	73.50	120.0/26976	132.00	13.80
P 101.6F131A 2	101.60	50.00	33.00	16.000	66.00	70.50	145.0/32596	159.50	13.80
P 101.6F135A 2	101.60	26.50	25.22	11.100	55.50	60.00	127.0/28550	139.70	6.18
P 101.6F136K 2	101.60	31.75	50.80	19.050	—	112.00	200.0/44960	220.00	19.80
P 101.6F147K 1	101.60	50.80	34.90	15.880	—	92.00	200.0/44960	220.00	14.20
P 101.6F165A 2	101.60	57.15	33.27	15.900	—	87.50	230.0/51704	253.00	14.80
P 114.3F7A 2	114.30	63.50	31.60	15.900	—	80.40	200.0/44960	216.00	13.70
P 117	117.00	35.00	50.00	17.000	—	102.00	150.0/33721	166.50	13.40
P 120	120.00	50.00	28.00	12.000	54.00	58.00	160.0/35993	176.00	8.14
P 120A2F 4	120.00	32.00	37.00	12.700	69.10	—	140.0/31473	155.40	9.00
P 120F14A 2	120.00	57.48	37.00	12.700	69.10	74.00	140.0/31472	151.20	13.80
P 120F15A 1	120.00	50.00	28.00	12.000	54.00	58.00	160.0/35968	172.80	8.10
P 120F17A 2	120.00	47.00	47.40	24.000	—	109.00	500.0/112400	540.00	25.00
P 125A2F 1	125.00	44.00	44.00	20.000	—	97.20	150.0/33720	165.00	14.33
P 125F 2	125.00	32.00	18.50	8.000	39.00	—	50.0/11240	55.00	2.66
P 125F9A 2	125.00	45.00	25.00	14.600	55.50	60.00	50.0/11240	55.00	2.58

带附板输送链

Conveyor chains with attachments

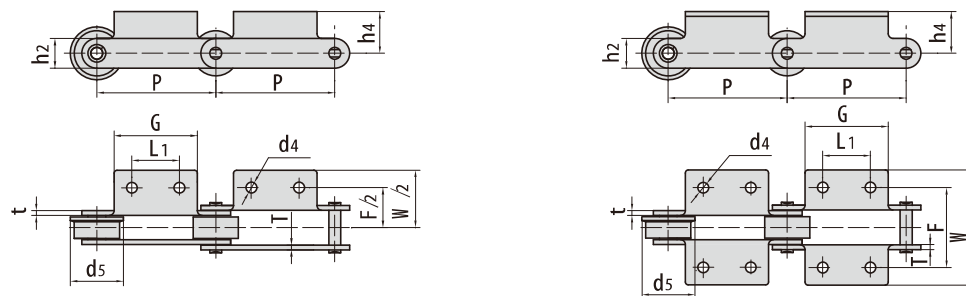


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 101.6F54K1	101.60	△	50.80	101.60	146.40	31.75	38.10	14.20	9.65	-
P 101.6F56K2	101.60	45.00	81.00	142.20	179.20	32.50	45.00	11×15	10.00	-
P 101.6F57K3	101.60	50.80	82.60	101.60	132.50	36.50	44.45	10.3/15	6.40	-
P 101.6F62K1	101.60	△	50.80	101.60	146.40	31.75	41.30	14.20	9.65	-
P 101.6F69K3	101.60	38.10	68.00	69.90	103.20	22.20	33.00	10.30	6.40	-
P 101.6F76	101.60	60.00	76.20	70.00	101.20	35.00	38.10	5.00	4.00	70.00
P 101.6F80A2	101.60	40.00	80.00	110.00	146.00	35.00	38.10	15.00	8.00	-
P 101.6F84A2	101.60	50.80	79.50	101.60	133.60	28.70	31.80	9.60	4.80	-
P 101.6F88	101.60	44.45	71.00	101.00	142.50	31.75	39.50	11.00	9.50	-
P 101.6F91A1	101.60	△	70.00	80.00	108.00	22.00	25.00	M 10	5.00	-
P 101.6F95K2	101.60	40.00	70.00	90.00	123.00	28.00	32.00	12.00	6.00	-
P 101.6F97K1	101.60	△	76.20	92.00	134.80	25.40	38.10	14.20	7.90	-
P 101.6F98K2	101.60	40.00	70.00	78.00	105.00	32.00	30.00	11.50	5.00	-
P 101.6F101K1	101.60	△	50.80	101.60	146.40	31.75	38.10	9.70	9.65	-
P 101.6F115A2	101.60	32.00	66.00	75.40	107.00	21.25	28.50	9.35	4.50	-
P 101.6F117A2	101.60	32.00	56.00	93.80	125.80	20.00	40.00	9.50	6.00	-
P 101.6F121A1	101.60	△	70.00	80.00	109.60	22.00	25.00	M 10	5.00	-
P 101.6F123K1	101.60	△	70.00	100.00	132.60	28.00	38.10	10.00	6.40	-
P 101.6F128K3	101.60	50.65	80.20	101.80	132.00	36.60	42.50	10.00	6.40	-
P 101.6F131A2	101.60	32.00	56.00	97.00	129.00	20.00	40.00	12.00	6.00	-
P 101.6F135A2	101.60	100.00	143.00	100.00	134.00	23.80	35.70	11.50	6.00	-
P 101.6F136K2	101.60	44.45	152.40	133.40	171.60	47.63	57.15	12.70	9.50	-
P 101.6F147K1	101.60	△	50.80	111.10	149.20	31.75	38.10	14.30	9.50	-
P 101.6F165A2	101.60	40.00	80.00	101.60	154.00	31.00	38.10	15.50	9.70	-
P 114.3F7A2	114.30	40.00	76.00	110.00	146.00	35.00	38.10	15.00	8.00	-
P 117	117.00	90.00	160.00	136.00	176.00	35.00	40.00	14.00	8.00	-
P 120	120.00	50.00	75.00	82.00	119.60	20.00	40.00	7.00	5.00	59.00
P 120A2F4	120.00	65.00	100.00	96.00	118.00	44.50	48.00	11.00	6.00	-
P 120F14A2	120.00	65.00	100.00	96.00	118.00	44.50	48.00	11.00	6.00	-
P 120F15A1	120.00	△	75.00	84.00	119.60	20.00	40.00	12.50	5.00	-
P 120F17A2	120.00	65.00	100.00	126.40	156.40	58.00	72.00	11.00	10.00	-
P 125A2F1	125.00	50.00	80.00	118.00	160.00	43.00	50.00	14.00	8.00	-
P 125F2	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	42.00
P 125F9A2	125.00	30.00	60.00	90.00	128.00	35.00	35.00	11.00	6.00/5.00	55.00

△附板带一个孔
△Attachments with 1 hole

带附板输送链



Conveyor chains with attachments

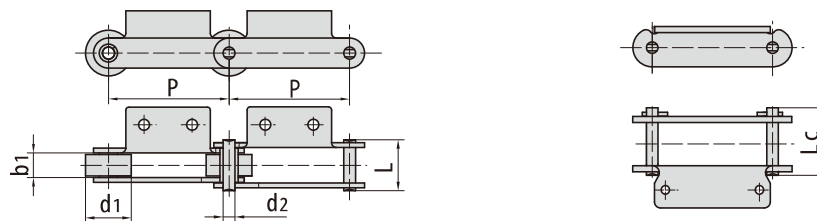

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 125F2K2-P	125.00	32.00	18.50	8.000	-	40.00	50.0/11240	55.00	2.83
P 125F2A2-F	125.00	32.00	18.50	8.000	-	39.00	50.0/11240	55.00	2.34
P 125F25K2-P	125.00	32.00	18.50	8.000	-	49.00	60.0/13488	66.00	4.00
P 125F28A2	125.00	32.00	18.50	8.000	-	40.00	50.0/11240	55.00	3.13
P 125F30A2-F	125.00	50.00	30.00	14.500	58.10	63.00	80.0/17984	88.00	8.76
P 125F38K2	125.00	47.50	25.50	26.000	60.00	66.00	180.0/40464	198.00	12.12
P 125F54A2-F	125.00	50.00	30.00	14.500	58.10	63.00	120.0/26976	132.00	8.76
P 125F70A2-P	125.00	70.00	37.50	18.000	-	80.00	230.0/51704	253.00	15.40
RF10125R-A2	125.00	50.80	30.00	14.500	-	69.00	226.0/50805	248.60	9.67
P 125F82K2	125.00	32.00	29.50	14.270	-	71.50	160.0/35968	172.80	10.30
P 125F88A2	125.00	42.00	14.00	10.000	35.50	39.50	56.0/12589	61.60	4.40
P 130K2F2	130.00	80.00	40.00	24.000	77.60	88.30	200.0/44992	218.00	13.90
P 139.7F1A1	139.70	52.00	17.60	19.050	44.50	51.50	100.0/22480	108.00	6.02
P 150F2	150.00	40.00	27.00	11.100	57.00	61.00	124.6/28318	137.00	5.40
P 150F4	150.00	50.00	37.00	16.000	77.50	82.50	170.0/38243	187.00	10.90
P 150F6	150.00	50.00	30.00	12.000	49.50	-	86.7/19704	95.00	7.27
P 150F11A2	150.00	46.70	21.50	15.000	46.60	51.50	130.0/29245	142.00	7.13
P 150F13A2	150.00	47.60	21.50	15.000	50.60	55.50	130.0/29245	142.00	8.52
P 150F14A2	150.00	47.60	21.50	19.000	50.60	56.50	130.0/29245	142.00	8.59
P 150F16A2	150.00	45.00	30.00	16.000	-	75.50	170.0/38243	187.00	8.56
P 150F18	150.00	50.00	37.00	16.000	77.50	82.50	170.0/38243	187.00	14.49
RF10150RA2	150.00	50.80	30.00	14.500	69.00	-	113.0/25420	124.00	9.20
P 150F21A2	150.00	57.48	35.91	19.050	-	79.00	150.0/33744	166.50	11.18
P 150F26A2	150.00	44.50	30.00	14.500	-	69.00	113.0/25420	126.00	7.96
P 150F31A2	150.00	60.00	35.00	16.000	-	67.20	170.0/38243	187.00	11.10
P 150F32A2	150.00	44.50	27.00	11.300	-	67.00	78.0/17547	86.50	6.78
P 150F53A2	150.00	40.00	22.00	11.100	-	60.00	120.0/26976	132.00	6.18
P 150F78A1	150.00	50.00	30.90	14.500	-	70.00	150.0/33721	165.00	8.81
P 150F85	150.00	70.00	36.00	19.000	-	94.10	160.0/35969	184.00	15.20
RF10150RA2-F	150.00	50.80	30.00	14.500	-	69.00	113.0/25420	124.00	9.50
P 150F105A2-F	150.00	50.80	30.00	14.500	-	69.00	113.0/25402	124.30	9.48
P 150F105K2	150.00	50.80	30.00	14.500	-	69.00	113.0/25402	124.30	8.44
P 150F110A2	150.00	50.80	30.00	14.500	62.50	67.60	113.0/25402	124.30	8.37
P 150F112A2	150.00	50.00	28.00	14.500	-	67.00	135.0/30348	148.50	8.07

带附板输送链

Conveyor chains with attachments

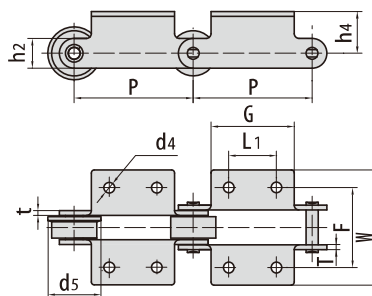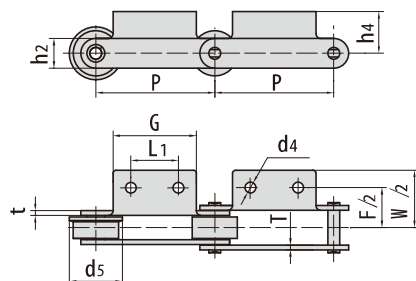


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 125F2K2-P	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	-
P 125F2A2-F	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	42.00
P 125F25K2-P	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	5.00	-
P 125F28A2	125.00	46.00	76.00	64.00	90.00	45.00	22.00	8.00	3.00	42.00
P 125F30A2-F	125.00	50.00	80.00	96.00	135.00	35.00	35.00	11.00	5.00	64.00
P 125F38K2	125.00	90.00	184.00	105.00	170.00	31.50	54.00	16.00	7.00/5.00	-
P 125F54A2-F	125.00	50.00	80.00	96.00	135.00	35.00	35.00	11.00	5.00	64.00
P 125F70A2-P	125.00	56.00	90.00	120.00	160.00	38.00	50.00	14.80	7.00/8.00	-
R F 10125R-A2	125.00	50.00	80.00	100.00	134.00	28.00	38.10	12.00	6.30	-
P 125F82K2	125.00	50.00	80.00	100.00	132.00	29.00	38.10	12.00	6.50	-
P 125F88A2	125.00	55.00	80.00	80.00	100.80	6.50	35.00	9.60	4.00	-
P 130K2F2	130.00	55.00	95.00	102.00	144.00	47.50	60.00	11.00	6.00	-
P 139.7F1A1	139.70	△	40.00	80.40	109.40	31.00	40.00	15.00	5.00/4.00	-
P 150F2	150.00	60.00	85.00	92.00	117.30	22.50	32.00	10.00	6.00	-
P 150F4	150.00	60.00	85.00	120.00	150.00	33.00	43.00	14.00	8.00	-
P 150F6	150.00	50.00	75.00	86.60	126.60	17.50	35.00	9×26	4.00	59.00
P 150F11A2	150.00	36.00	60.00	163.50	189.60	40.15	39.70	10.60	5.00	-
P 150F13A2	150.00	36.00	60.00	164.00	193.50	52.00	40.00	11.00	6.00	-
P 150F14A2	150.00	36.00	60.00	164.00	193.50	52.00	40.00	11.00	6.00	-
P 150F16A2	150.00	60.00	90.00	110.00	140.00	32.00	38.00	12.00	8.00	-
P 150F18	150.00	60.00	85.00	120.00	150.00	33.00	43.00	M 10	8.00	-
R F 10150RA2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F21A2	150.00	26.00	45.70	100.40	129.40	58.50	44.45	10.90	6.40	-
P 150F26A2	150.00	60.00	84.50	100.00	130.00	23.60	33.60	12.00	6.30	60.00
P 150F31A2	150.00	60.00	90.00	100.00	139.00	28.00	35.00	11.00	6.00	66.00
P 150F32A2	150.00	60.00	90.00	100.00	128.00	28.00	28.60	12.00	6.30	55.00
P 150F53A2	150.00	60.00	85.00	70.00	115.00	22.00	32.00	10.00	6.00	50.00
P 150F78A1	150.00	△	90.00	100.00	136.60	28.95	38.10	11.50	6.30	65.00
P 150F85	150.00	60.00	100.00	130.00	160.00	32.50	50.00	13.00	10.00	-
R F 10150RA2-F	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	65.00
P 150F105A2-F	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	12.00
P 150F105K2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F110A2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F112A2	150.00	60.00	90.00	98.00	128.00	28.00	38.10	12.00	6.30	-

△附板带一个孔

△A ttachm ents w ith 1 hole

带附板输送链

Conveyor chains with attachments

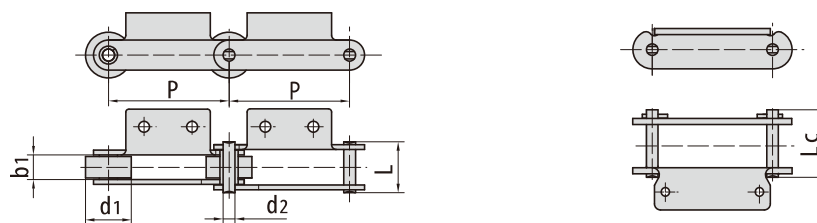



东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 150F 121A2	150.00	50.00	30.00	14.500	-	68.00	113.0/25402	124.30	7.78
P 150F 137A2	150.00	60.00	42.00	15.300	74.30	81.00	180.0/40464	198.00	13.44
P 150F 144A2	150.00	80.00	48.00	25.000	-	105.00	450.0/101160	495.00	32.00
P 152F	152.40	40.10	37.50	19.100	97.50	-	328.7/74704	378.00	15.88
P 152F4	152.40	50.80	30.60	14.270	62.80	67.50	88.0/20000	100.00	9.24
P 152F 11	152.40	38.00	53.50	14.700	112.40	-	130.0/29245	142.00	12.60
P 152F 16	152.40	70.00	76.20	25.400	152.00	-	160.0/35969	176.00	41.50
P 152F 19	152.40	50.80	30.60	14.270	62.80	67.50	112.0/25195	123.20	9.24
P 152F 20	152.40	47.60	39.70	19.050	99.70	-	300.0/67487	330.00	18.33
P 152F 32K2	152.40	36.00	45.00	20.000	103.00	-	300.0/67487	330.00	14.93
P 152F 33	152.40	36.00	68.00	20.000	128.00	-	300.0/67487	330.00	16.50
P 152F 41A2	152.40	36.00	36.00	15.500	-	90.00	235.2/52875	258.00	10.90
P 152F 42K 2F1	152.40	63.50	34.90	19.000	93.00	-	152.0/34193	168.90	18.80
P 152F 43	152.40	76.20	35.00	23.810	108.00	-	446.8/100510	513.50	27.60
P 152F 50	152.40	101.60	44.00	22.200	87.00	-	250.0/56240	275.00	26.70
P 152F 54	152.40	30.00	53.00	16.000	112.00	-	175.0/39380	193.00	11.10
P 152F 56	152.40	50.80	33.34	15.880	86.00	-	113.0/25420	124.30	10.70
R F 6205M F 6A2	152.40	65.00	37.10	15.900	88.00	-	158.0/35543	186.00	16.80
P 152F 78K 2F1	152.40	69.85	37.60	22.230	-	97.10	400.0/89923	440.00	26.70
P 152F 107A2	152.40	50.80	27.60	11.100	-	70.00	110.0/24728	121.00	9.10
P 152F 111K2	152.40	69.85	37.10	22.230	-	111.20	413.0/92846	474.00	25.10
P 152F 117K2	152.40	36.00	36.00	15.500	-	90.00	232.0/52155	255.00	12.30
*P 152F 128K2	152.40	44.45	76.20	25.400	142.50	153.00	365.0/82055	401.00	36.03
P 152F 137A2	152.40	50.80	28.70	12.000	-	74.00	120.0/26977	132.00	8.52
R F 6205M F 7	152.40	65.00	37.10	15.900	-	88.00	158.0/35519	186.00	15.49
P 152F 144K2	152.40	40.00	37.30	19.050	-	95.00	244.6/55000	269.06	15.70
P 152F 168A2	152.40	38.10	36.50	15.900	-	87.50	252.7/56807	278.00	10.70
P 152F 176K2	152.40	36.00	36.00	15.500	-	90.00	237.0/53278	260.70	11.80
P 152F 180	152.40	40.10	37.50	19.100	-	97.50	370.0/83176	407.00	14.60
P 152F 206K2	152.40	70.00	40.00	19.000	-	98.00	220.0/49456	242.00	20.90
P 152F 208K2	152.40	34.90	37.10	15.900	-	88.00	220.0/49456	242.00	26.00
P 152F 213K2	152.40	36.00	36.00	15.500	78.00	85.00	235.2/52873	258.72	11.90
P 152F 227K2	152.40	75.00	37.00	19.000	-	98.00	220.0/49456	242.00	21.34
*P 152F 247K2	152.40	44.50	76.20	25.400	-	149.00	560.0/125888	616.00	28.10

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

带附板输送链

Conveyor chains with attachments

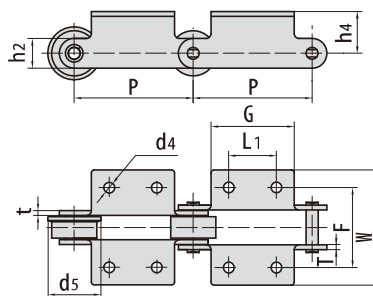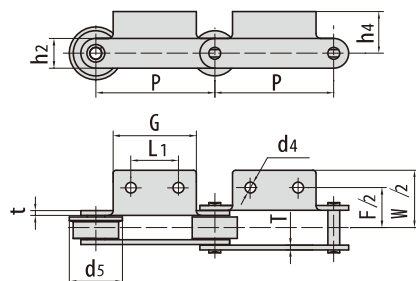


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 150F121A2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.00	—
P 150F137A2	150.00	50.00	78.50	109.00	136.00	49.00	45.00	12.30	6.00	74.00
P 150F144A2	150.00	65.00	110.00	160.00	200.00	60.00	65.00	17.00	10.00	99.00
P 152F	152.40	60.00	100.00	130.00	202.00	45.00	50.00	15.00	9.00	—
P 152F4	152.40	60.00	100.00	110.00	140.00	32.00	38.00	15.00	6.00	65.00
P 152F11	152.40	44.60	74.80	133.70	168.00	24.00	39.00	10.80	9.60/11.40	—
P 152F16	152.40	63.50	178.50	184.15	241.15	47.65	63.50	20.70	12.70	—
P 152F19	152.40	60.00	100.00	110.00	140.00	32.00	38.00	15.00	6.00	65.00
P 152F20	152.40	△	76.20	120.65	172.30	41.30	50.80	17.50	9.50	—
P 152F32K2	152.40	60.00	110.00	135.00	171.00	40.00	52.00	14.00	10.00	—
P 152F33	152.40	60.00	110.00	158.00	194.00	40.00	52.00	14.00	10.00	—
P 152F41A2	152.40	60.00	90.00	120.00	160.00	35.50	50.00	14.00	8.00	—
P 152F42K2F1	152.40	66.80	140.00	108.20	148.20	41.40	50.80	12.70	9.50	—
P 152F43	152.40	76.20	108.00	111.10	155.60	44.45	60.30	12.70	11.10	—
P 152F50	152.40	63.50	102.00	101.60	135.00	37.50	65.00	13.50	6.00	—
P 152F54	152.40	45.00	74.00	135.00	165.00	25.40	39.00	11.00	10.00	—
P 152F56	152.40	50.80	76.20	101.60	133.40	28.60	38.10	11.10	8.00	—
RF6205M F6A2	152.40	60.00	100.00	120.00	158.00	38.00	45.00	15.00	8.00	85.00
P 152F78K2F1	152.40	76.20	114.30	111.00	165.00	41.30	57.20	13.00	9.52	—
P 152F107A2	152.40	50.80	88.90	101.60	132.80	31.75	38.10	M 12	6.35	—
P 152F111K2	152.40	76.20	114.30	111.10	153.90	41.30	57.20	13.50	12.70	—
P 152F117K2	152.40	60.00	100.00	120.00	160.00	38.00	50.00	14.00	8.00	—
P 152F128K2	152.40	63.50	175.50	184.00	238.20	47.75	63.50	17.50	12.70	—
P 152F137A2	152.40	50.80	76.20	102.40	137.00	32.00	32.00	10.50	7.00	—
RF6205M F7	152.40	60.00	100.00	120.00	158.00	34.50	45.00	14.80	8.00	85.00
P 152F144K2	152.40	60.00	100.00	130.00	165.00	44.45	50.80	15.00	9.52	—
P 152F168A2	152.40	60.00	100.00	120.00	162.00	38.00	45.00	15.00	8.00	—
P 152F176K2	152.40	60.00	100.00	120.00	160.00	38.00	50.00	14.00	8.00	—
P 152F180	152.40	60.00	100.00	130.00	202.00	45.00	50.00	15.00	9.00	—
P 152F206K2	152.40	60.00	100.00	110.00	150.00	44.00	52.00	13.00	10.00	—
P 152F208K2	152.40	60.00	100.00	120.00	158.00	38.00	44.50	15.00	7.90	—
P 152F213K2	152.40	60.00	90.00	120.00	160.00	35.50	50.00	14.00	8.00	—
P 152F227K2	152.40	60.00	100.00	110.00	140.00	44.00	52.00	13.00	10.00	—
P 152F247K2	152.40	63.50	108.00	184.20	241.00	47.60	63.50	18.00	12.70	—

△附板带一个孔

△Attachments with 1 hole

带附板输送链

Conveyor chains with attachments

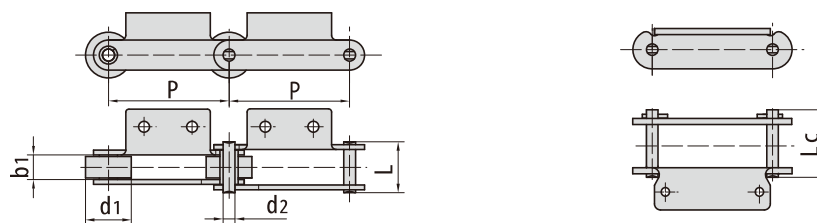


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 152F252A2	152.40	69.90	37.10	19.050	-	98.50	230.0/51704	253.00	18.70
P 153F3K2	153.60	35.00	54.10	17.500	-	106.00	200.0/44961	220.00	14.02
*P 160F1	160.00	36.00	55.00	20.000	108.00	-	50.0/11364	55.00	14.50
P 160F3	160.00	48.00	25.00	14.850	62.50	-	120.0/26977	132.00	7.10
P 160F5	160.00	60.00	33.00	14.270	64.00	72.00	150.0/34091	165.00	8.00
P 160F8	160.00	40.00	20.00	11.000	50.00	-	55.0/12500	61.00	4.58
P 160F18	160.00	50.00	34.00	20.000	-	88.00	100.0/22496	109.50	14.93
P 180F25	160.00	70.00	25.00	14.250	55.50	60.50	100.0/22496	109.50	7.65
P 160F26	160.00	50.00	29.90	13.940	-	60.00	105.0/23620	115.50	6.41
*P 160F37A2	160.00	45.00	56.00	28.000	-	150.00	600.0/134885	660.00	31.24
P 160F53K2	160.00	36.00	36.00	18.000	71.00	76.00	160.0/35790	176.00	-
*P 160F64K2	160.00	38.00	55.00	20.000	-	108.00	50.0/11240	55.00	55.00
*P 160F79A2	160.00	40.00	44.60	26.000	-	102.00	380.0/85432	418.00	55.00
P 175F5A2	175.00	50.00	30.00	14.300	-	67.00	135.0/30348	148.50	7.20
P 185	185.00	50.80	30.60	14.270	62.80	67.50	70.0/15909	77.00	8.42
P 200F6	200.00	50.00	37.00	16.000	77.50	82.50	170.0/38243	188.70	9.69
P 200F7	200.00	40.00	27.00	11.100	57.00	61.00	124.6/28030	137.00	9.78
P 200F8	200.00	65.00	37.00	16.000	86.50	-	170.0/38243	188.70	15.23
P 200F13	200.00	80.00	51.00	20.000	106.00	-	180.0/40492	198.00	26.10
P 200F15	200.00	40.10	51.40	19.100	109.50	-	213.0/47916	234.30	12.60
P 200F23	200.00	65.00	36.50	16.000	-	86.50	170.0/38243	188.70	11.57
P 200F22	200.00	90.00	48.00	16.000	-	99.00	170.0/38243	188.70	19.60
P 200F26A2	200.00	50.00	37.00	16.000	85.50	90.50	170.0/39243	188.70	11.08
P 200F28K2F1	200.00	65.00	37.10	16.000	77.50	85.50	160.0/35969	176.00	18.80
P 200F30	200.00	65.00	38.00	18.000	-	79.50	120.0/26977	130.80	10.80
R F 12200A2-F-200	200.00	65.00	37.10	15.900	-	86.50	279.0/62763	306.90	14.20
P 200F82A2-F	200.00	65.00	51.00	16.000	-	100.00	170.0/38243	195.00	14.60
P 200F118A2	200.00	50.00	29.60	14.300	-	67.80	135.0/30349	148.50	-
P 200F121A2	200.00	65.00	37.10	15.900	-	86.50	200.0/44962	220.00	-
P 200F122A2-F	200.00	70.00	37.00	22.000	-	106.00	480.0/107908	528.00	-
P 200F123A2-F	200.00	65.00	37.10	15.900	-	86.50	250.0/56202	275.00	-
P 200F124A2-F	200.00	70.00	37.10	15.900	-	86.50	160.0/35970	176.00	-
P 200F126A2-F	200.00	70.00	37.10	18.000	-	86.50	279.0/62722	306.90	-
P 200F133A2	200.00	80.00	51.40	19.050	-	109.50	2230.5/10132	245.00	-

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.

带附板输送链

Conveyor chains with attachments

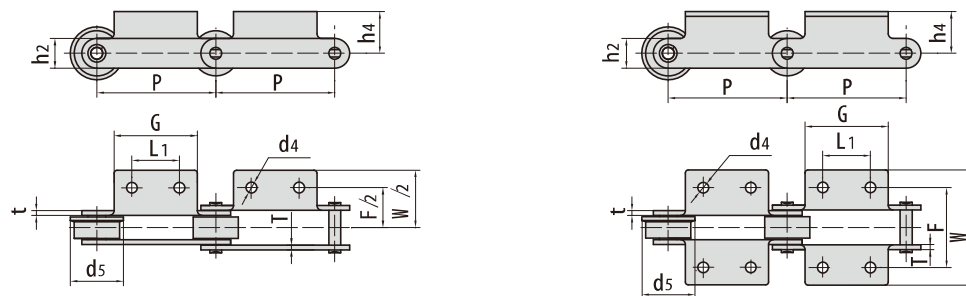


东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 152F252A2	152.40	37.00	83.00	130.00	166.00	40.00	50.00	15.00	9.00	-
P 153F3K2	153.60	44.50	204.80	136.60	168.60	38.10	44.50	12.70	8.00	-
P 160F1	160.00	60.00	110.00	130.00	173.00	40.00	50.00	14.00	9.00	-
P 160F3	160.00	49.00	70.00	83.00	117.00	32.50	35.00	8.50	6.00	-
P 160F5	160.00	35.00	70.00	110.00	166.00	38.70	40.00	14.00	5.60	-
P 160F8	160.00	80.50	133.00	56.00	100.00	16.00	32.00	8.33×13.30	4.50	-
P 160F18	160.00	60.00	110.00	110.00	153.00	40.00	50.00	15.00	9.00	-
P 180F25	160.00	△	120.00	70.00	89.00	27.50	36.00	10.00	5.60	-
P 160F26	160.00	30.00	50.00	94.00	124.00	35.00	40.00	10.00	4.00	65.00
P 160F37A2	160.00	100.00	145.00	160.00	210.00	62.00	80.00	18.00	12.00	-
P 16053K2	160.00	100.00	130.00	110.00	142.00	41.00	50.00	14.00	7.0/6.0	-
P 160F64K2	160.00	60.00	110.00	130.00	173.00	40.00	55.00	14.00	9.00	-
P 160F79A2	160.00	46.60	80.00	147.00	192.00	61.50	63.00	14.00	10.00	-
P 175F5A2	175.00	80.00	120.00	100.00	130.00	28.00	38.10	12.00	6.00	-
P 185	185.00	60.00	120.00	110.00	140.00	32.00	38.00	15.00	6.00	65.00
P 200F6	200.00	81.50	120.00	120.00	150.00	33.00	43.00	14.00	8.00	-
P 200F7	200.00	81.50	120.00	92.00	122.00	22.00	32.00	10.00	6.00	-
P 200F8	200.00	80.00	120.00	200.00	238.00	38.00	43.00	15.00	8.00	80.00
P 200F13	200.00	110.00	150.00	152.00	204.00	43.00	50.00	13.00	9.00	-
P 200F15	200.00	80.00	120.00	150.00	200.00	43.00	50.80	15.00	9.50	-
P 200F23	200.00	80.00	120.00	120.00	170.00	38.00	43.00	15.00	8.00	-
P 200F22	200.00	80.00	120.00	212.00	250.00	38.00	43.00	15.00	8.00	100.00
P 200F26A2	200.00	81.50	120.00	120.00	154.00	33.00	43.00	14.00	10.00	-
P 200F28K2F1	200.00	80.00	120.00	120.00	158.00	75.00	44.50	12.00	8.00	-
P 200F30	200.00	65.00	100.00	119.00	159.00	30.00	50.00	12.5/18.5	6.00	-
RF12200A2-F-200	200.00	80.00	120.00	120.00	158.00	38.00	44.50	15.00	7.90	80.00
P 200F82A2-F	200.00	60.00	100.00	116.00	146.00	42.00	43.00	15.00	8.00	80.00
P 200F118A2	200.00	80.00	120.00	100.00	130.00	28.00	38.10	12.00	6.00	-
P 200F121A2	200.00	80.00	120.00	120.00	158.00	38.00	44.50	15.00	7.90	-
P 200F122A2-F	200.00	80.00	120.00	128.00	176.00	43.75	55.00	13.00	12.70	85.00
P 200F123A2-F	200.00	80.00	120.00	120.00	158.00	38.00	44.50	15.00	7.90	80.00
P 200F124A2-F	200.00	80.00	120.00	120.00	158.00	38.00	44.50	13.00	7.90	85.00
P 200F126A2-F	200.00	80.00	120.00	120.00	158.00	38.00	44.50	13.00	7.90	85.00
P 200F133A2	200.00	80.00	120.00	150.00	200.00	45.00	50.80	15.00	9.50	100.00

△附板带一个孔
△Attachments with 1 hole

带附板输送链

Conveyor chains with attachments

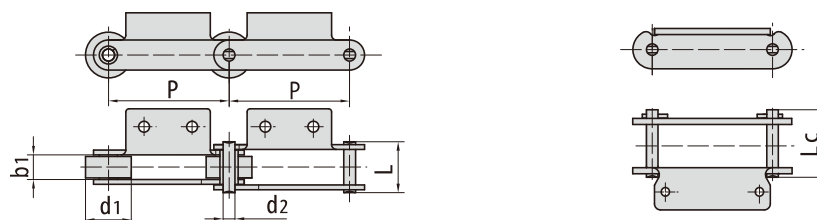



东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 200F 139A2-F	200.00	65.00	39.00	16.000	-	95.00	200.0/44962	220.00	-
P 200F 142A2-F	200.00	70.00	37.00	22.000	-	106.00	480.0/107908	528.00	-
P 200F 147A2-F	200.00	70.00	37.10	18.000	-	86.50	279.0/62722	306.90	-
P 203.2F6	203.20	88.90	45.97	25.400	-	116.30	489.0/110005	528.10	37.00
P 203.2F10	203.20	88.90	45.97	25.400	-	116.30	488.0/109706	536.00	37.00
P 203.2F16K2	203.20	101.40	46.10	25.400	-	122.00	680.0/152864	748.00	42.19
P 220F4A3	220.00	50.00	30.00	14.500	-	58.00	135.0/30348	148.50	6.40
P 228.6F28K2	228.60	101.60	57.15	22.230	-	118.30	231.0/51929	254.00	34.40
R F10250R A2	250.00	50.80	30.00	14.500	69.00	-	113.0/25420	124.30	6.47
P 250F25	250.00	50.00	30.00	14.000	-	81.30	170.0/38243	188.70	8.40
*P 250F38K2	250.00	50.80	65.00	38.000	-	143.50	700.0/157366	770.00	39.10
P 250F68A2	250.00	50.00	30.60	14.000	-	70.60	112.0/25178	128.00	7.60
P 250F106A2	250.00	80.00	51.40	19.100	-	109.50	351.9/79107	387.10	17.30
P 250F129K2	250.00	45.00	52.00	20.000	-	112.00	250.0/56200	275.00	17.50
P 250F142A2	250.00	50.00	30.00	14.300	-	67.00	135.0/30348	148.50	6.20
P 250F157A3	250.00	55.00	32.00	16.000	-	79.00	160.0/35968	176.00	9.40
P 250F170A2	250.00	50.00	30.00	14.300	-	67.00	135.0/30348	148.50	6.00
P 250F176A2	250.00	65.00	40.00	18.000	-	89.00	250.0/56200	275.00	12.80
P 250F191A2	250.00	80.00	60.00	34.000	-	164.00	1100.0/247280	1210.00	42.20
P 250F193A2	250.00	65.00	35.00	16.000	-	83.00	268.0/60246	294.80	13.13
P 250F200A2	250.00	65.00	37.10	15.900	-	83.50	186.0/41813	204.60	13.80
P 300F41A2	300.00	50.00	30.00	14.300	-	67.00	135.0/30348	148.50	5.73

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d₁ in the table indicates the external diameter of the bush.

带附板输送链


Conveyor chains with attachments

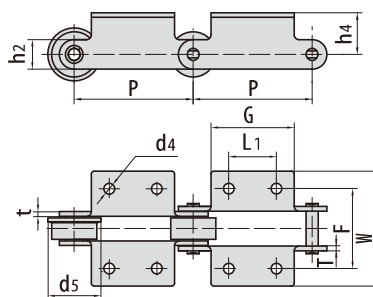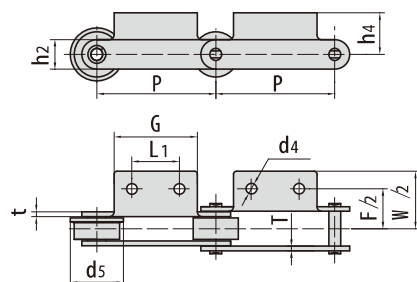

东华链号 Donghua Chain No.	P	L ₁	G	F	W	h ₄	h ₂	d ₄	t/T	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 200F 139A 2-F	200.00	80.00	120.00	118.00	163.00	35.00	45.00	15.00	7.50	80.00
P 200F 142A 2-F	200.00	80.00	120.00	164.00	176.00	43.75	55.00	13.00	12.70	85.00
P 200F 147A 2-F	200.00	80.00	120.00	120.00	158.00	38.00	44.50	13.00	7.90	85.00
P 203.2F 6	203.20	114.30	152.40	131.83	192.00	54.10	69.80	17.50	12.70	-
P 203.2F 10	203.20	82.55	152.40	131.83	192.00	54.10	69.80	17.50	12.70	-
P 203.2F 16K 2	203.20	82.50	134.00	133.30	198.00	55.90	76.20	17.00	12.70	-
P 220F 4A 3	220.00	60.00	90.00	100.00	136.00	28.00	38.00	12.00	6.00	-
P 228.6F 28K 2	228.60	88.90	130.00	152.40	198.00	73.00	63.50	13.50	9.50	-
R F 10250R A 2	250.00	80.00	120.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 250F 25	250.00	60.00	93.00	108.00	143.60	30.00	38.00	10.00	8.00	-
P 250F 38K 2	250.00	75.00	120.00	192.00	232.00	68.00	100.00	18.50	12.00	-
P 250F 68A 2	250.00	125.00	160.00	100.00	132.00	28.00	38.00	12.00	6.00	65.00
P 250F 106A 2	250.00	125.00	170.00	150.00	200.00	45.00	50.80	15.00	9.50	-
P 250F 129K 2	250.00	125.00	170.00	140.00	180.00	60.00	75.00	14.00	8.00	-
P 250F 142A 2	250.00	60.00	94.00	100.00	129.00	39.00	38.00	12.00	6.00	-
P 250F 157A 3	250.00	100.00	140.00	100.00	140.00	38.00	45.00	M 12	8.00	-
P 250F 170A 2	250.00	80.00	120.00	100.00	130.00	28.00	38.00	12.00	6.00	-
P 250F 176A 2	250.00	80.00	120.00	120.00	150.00	37.00	55.00	12.00	8.00	-
P 250F 191A 2	250.00	147.00	350.00	269.60	349.60	60.00	90.00	22.00	15.00	-
P 250F 193A 2	250.00	125.00	160.00	118.00	162.00	37.50	45.00	15.00	8.00	80.00
P 250F 200A 2	250.00	125.00	170.00	120.00	158.00	38.00	45.00	15.00	8.00	85.00
P 300F 41A 2	300.00	60.00	94.00	100.00	129.00	39.00	38.10	12.00	6.00	-


带附板输送链

Conveyor chains with attachments

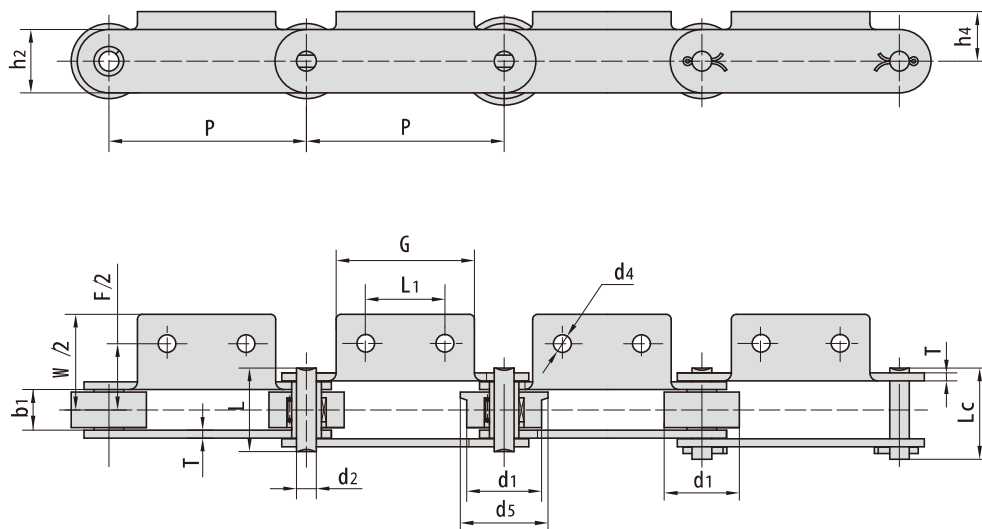

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 56F4-P-100	100.0	38.0	20.5	10.00	42.3	46.1	56.0/12727	62.0	4.30
M 56F7-P-100	100.0	38.0	17.0	10.00	38.8	42.6	56.0/12727	62.0	4.84
M 56F9-P-100	100.0	38.0	20.5	10.00	46.3	50.1	88.2/20045	97.0	5.60
M 56F24A2-F-100	100.0	50.0	20.5	10.00	46.3	50.1	88.2/20045	97.0	8.16
M 315F47A2-FZ-250	250.0	90.0	52.0	25.00	-	102.0	315.0/70812	346.5	22.40
M 630A2-F-400	400.0	140.0	65.0	36.00	-	152.0	630.0/141720	693.0	58.50
P 100	100.0	50.0	29.9	13.94	60.0	-	160.0/36364	176.0	9.27
P 100F4A2-F1	100.0	40.0	22.0	11.30	-	53.5	65.0/14612	71.5	5.52
P 150F40	150.0	38.0	20.5	10.00	41.1	44.6	80.0/17984	88.0	3.70
P 150F41	150.0	38.0	20.5	12.00	51.2	55.5	100.0/22480	110.0	5.50
P 160	160.0	50.0	29.9	13.94	60.0	-	160.0/36364	176.0	7.23
P 200F28	200.0	65.0	37.1	16.00	77.5	85.5	160.0/36364	176.0	14.10
P 200F31	200.0	80.0	37.1	16.00	77.5	85.5	160.0/36364	176.0	18.10
P 200F178A2	200.0	90.0	46.0	26.00	-	97.0	230.0/51704	253.0	22.00
P 200F188A2	200.0	80.0	48.0	18.00	-	96.2	200.0/44960	220.0	22.00
P 250F173A2	250.0	100.0	52.0	25.00	-	109.0	315.0/70812	345.0	32.70
P 300	300.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	24.32
P 350	350.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	23.60
P 400F1	400.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	22.67


带附板输送链 Conveyor chains with attachments

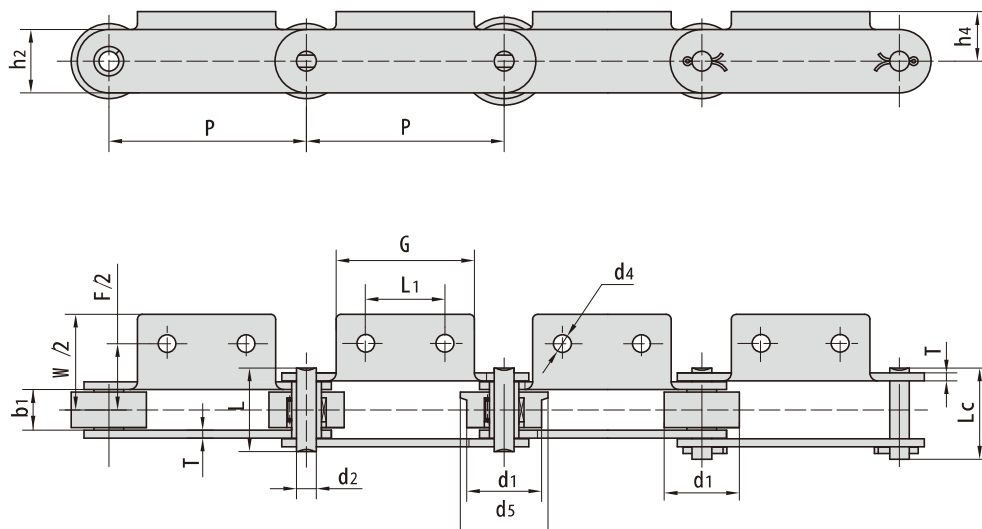

东华链号 Donghua Chain No.	L1	G	F	W	h4	h2	d4	T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm
M 56F4-P-100	40.0	70.0	68.5	98.50	25.0	25.0	9.0	4.0	44.5
M 56F7-P-100	40.0	70.0	71.5	92.00	55.0	25.0	6.5	4.0	45.0
M 56F9-P-100	40.0	70.0	67.5	96.58	25.0	32.0	9.0	5.0	44.5
M 56F24A2-F-100	50.0	90.0	88.0	117.00	41.0	32.0	10.0	5.0	60.0
M 315F47A2-FZ-250	100.0	210.0	160.0	194.00	70.0	70.0	19.0	8.0	110.0
M 630A2-F-400	190.0	250.0	230.0	300.00	90.0	103.0	26.0	14.0	175.0
P 100	40.0	65.0	98.0	128.00	35.0	40.0	10.0	4.0	65.0
P 100F4A2-F1	40.0	65.0	70.0	94.00	22.0	32.0	10.0	4.5	50.0
P 150F40	60.0	90.0	71.0	94.00	27.0	32.0	10.0	3.7	-
P 150F41	60.0	90.0	71.0	94.00	29.0	32.0	10.0	6.0	-
P 160	85.0	115.0	94.0	124.00	35.0	40.0	10.0	4.0	65.0
P 200F28	80.0	120.0	120.0	158.00	63.0	44.5	12.0	8.0	80.0
P 200F31	80.0	140.0	120.0	158.00	85.0	44.5	M 10	8.0	100.0
P 200F178A2	110.0	160.0	126.0	166.00	85.0	60.0	12.0	8.0	103.0
P 200F188A2	95.0	160.0	138.0	184.00	85.0	51.0	11.0	8.0	99.0
P 250F173A2	160.0	200.0	146.0	186.00	95.0	75.0	12.0	10.0	120.0
P 300	200.0	250.0	150.0	190.00	105.0	60.0	13.0	10.0	100.0
P 350	250.0	300.0	150.0	190.00	105.0	60.0	13.0	10.0	100.0
P 400F1	300.0	350.0	150.0	190.00	105.0	60.0	15.0	10.0	100.0

带附板输送链


Conveyor chains with attachments

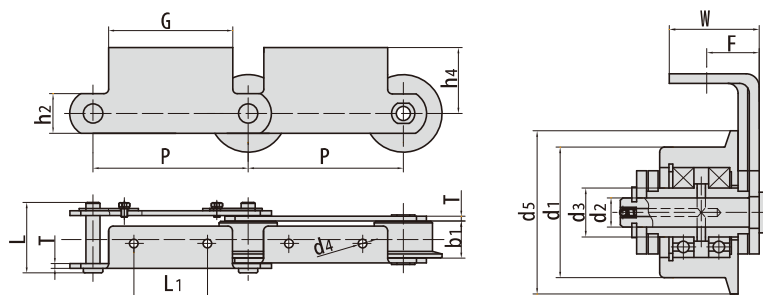

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length	套筒直径 Bush diameter	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength
	P	d1 max	d5 max	b1 min	d2 max	L max	d3 max	h2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
M 160F6-F-200	200.0	80.0	98.0	47.5	18.0	91.0	30.0	51.0	6.0	160.0/35968
M 160F7-F-200	200.0	80.0	98.0	47.5	18.0	99.0	30.0	51.0	8.0	160.0/35968
M 224F9-F-200	200.0	90.0	105.0	44.5	26.0	112.0	35.0	60.0	8.0	224.0/50355
P 250F108A2	250.0	85.0	105.0	42.0	21.0	92.8	30.0	62.0	8.0	224.0/50355
P 250F109A2	250.0	85.0	105.0	42.0	21.0	92.8	30.0	62.0	8.0	224.0/50355
P 250F119A2	250.0	80.0	100.0	51.0	135.3	99.0	30.0	53.0	8.0	160.0/35968
P 250F155A2-FZ	250.0	85.0	105.0	42.0	21.0	93.8	30.0	62.0	8.0	224.0/50355
P 250F121A2	250.0	85.0	104.0	42.0	21.0	91.0	30.0	62.0	8.0	224.0/50355

东华链号 Donghua Chain No.	P	L1	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
M 160F6-F-200	200.0	95.0	160.0	32.0	55.0	85.0	11.0
M 160F7-F-200	200.0	95.0	160.0	36.0	59.0	85.0	11.0
M 224F9-F-200	200.0	120.0	160.0	35.0	50.0	85.0	12.0
P 250F108A2	250.0	144.0	200.0	48.5	64.5	120.0	12.5
P 250F109A2	250.0	144.0	200.0	48.5	64.5	120.0	11.0
P 250F119A2	250.0	140.0	200.0	46.0	68.0	90.0	M 10
P 250F155A2-FZ	250.0	160.0	200.0	45.5	64.5	120.0	12.0
P 250F121A2	250.0	160.0	200.0	44.0	64.5	120.0	12.0


东华链号 Donghua Chain No.	P	L1	W	t
mm	mm	mm	mm	mm
P 152F13	152.4	60.0	101.0	16.0

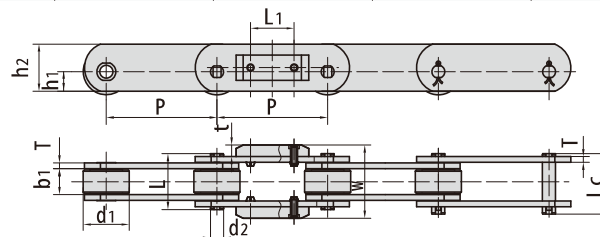

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between innerplates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth		链板厚度 Plate thickness	抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h1 max	h2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P 152F13	152.4	63.4	35.0	18.0	77.0	83.0	26.9	65.0	8.0	160.0/35968


带附板输送链

Conveyor chains with attachments

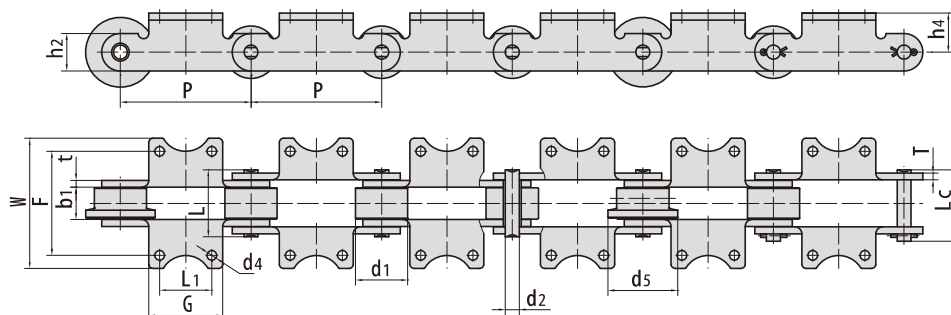

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 125F43A2	125.00	40.00	27.00	11.10	57.00	61.00	32.00	6.00	124.60/28010	6.56
P 150F4K2	150.00	50.00	37.00	16.00	77.50	82.50	43.00	8.00	170.00/38216	14.34
P 150F108K2-F	150.00	60.00	37.00	16.00	77.50	82.50	43.00	8.00	170.00/38216	20.80

东华链号 Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	ds
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 125F43A2	125.00	60.00	85.00	92.00	117.20	22.50	32.00	10.00	6.00	-
P 150F4K2	150.00	60.00	85.00	120.00	150.00	33.00	14.00	14.00	8.00	-
P 150F108K2-F	150.00	60.00	85.00	120.00	150.00	45.00	11.00	11.00	8.00	80.00

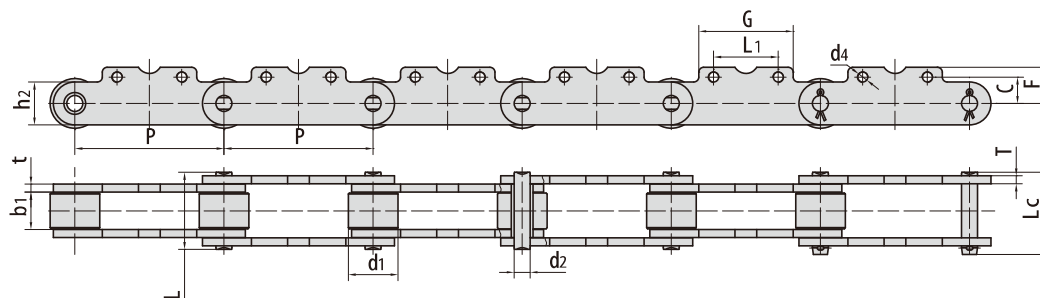


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 150F134SK2	150.00	50.00	37.00	16.00	77.50	82.50	43.00	8.00	170.00/38216	12.90

东华链号 Donghua Chain No.	P	L1	G	C	F	d4
	mm	mm	mm	mm	mm	mm
P 150F134SK2	150.00	65.00	95.00	36.50	43.00	M 10

带附板输送链


Conveyor chains with attachments

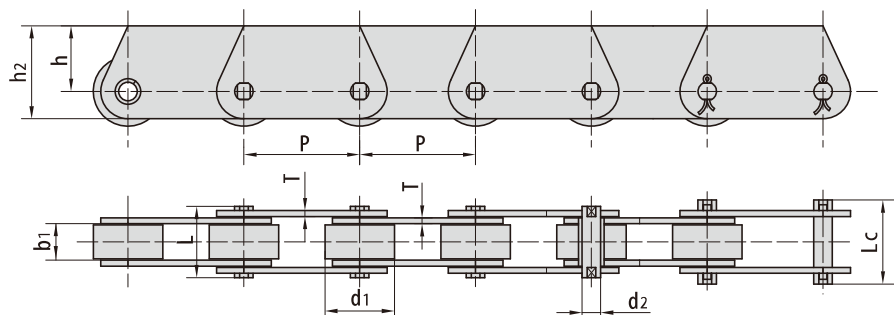


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth		链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{max}	h _{2 max}	T _{max}	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P31.75F1	31.75	19.05	9.80	5.08	19.2	22.5	18.00	25.5	1.60	20.0/4545	1.48
P63F10	63.00	42.00	23.00	11.11	50.0	53.0	29.40	44.4	4.80	80.0/17997	8.32
P100F59	100.00	40.00	25.00	14.50	61.0	67.5	23.00	40.0	6.30	100.0/22496	7.98
P100F285	100.00	30.00	16.00	7.92	—	44.3	20.00	31.8	4.80	56.0/12588	3.65
P101.6F10	101.60	50.00	30.00	14.27	64.0	68.5	30.00	50.0	6.40	180.0/40909	11.56
P101.6F178	101.60	57.15	33.00	16.00	81.5	88.0	31.75	50.8	9.70	125.0/28100	16.30
P125F69	125.00	65.00	51.40	19.00	101.0	108.0	38.10	63.5	9.50	224.0/50355	23.20
P125F71	125.00	65.00	51.40	18.90	101.0	108.0	38.10	63.5	9.50	224.0/50355	23.20
P152F49	152.40	63.50	34.00	15.60	—	82.0	38.10	65.0	8.00	160.0/35993	16.30
P150F86	150.00	50.00	21.00	15.00/20.00	60.0	65.0	30.00	50.0	8.00	112.0/25178	8.92
P160F2	160.00	60.00	38.00	20.00	—	80.0	36.00	60.0	6.00	190.0/43181	12.57
P160F44	160.00	60.00	38.00	20.00	72.0	78.0	35.00	60.0	6.00	190.0/42700	12.30
P300F23	300.00	65.00	37.10	15.90	—	90.0	40.00	63.5	9.50	213.0/47884	13.60
M E 40F2-P-50.8	50.80	31.80	15.00	14.00	36.0	39.7	41.00	26.0	4.00	53.9/12123	5.20
M E 40F2-P-76.2	76.20	31.80	15.00	14.00	36.0	39.7	41.00	26.0	4.00	53.9/12123	4.32
M E 40F2-P-101.6	101.60	31.80	15.00	14.00	36.0	39.7	41.00	26.0	4.00	53.9/12123	3.88
M E 40F3-P-50.8	50.80	31.80	15.00	14.00	36.0	39.7	38.00	25.3	4.00	53.9/12123	4.89
M E 40F3-P-76.2	76.20	31.80	15.00	14.00	36.0	39.7	38.00	25.3	4.00	53.9/12123	4.05
M E 40F3-P-101.6	101.60	31.80	15.00	14.00	36.0	39.7	38.00	25.3	4.00	53.9/12123	3.63
M E 160F2-P-101.6	101.60	66.67	25.40	27.00	62.8	—	74.60	49.6	8.00	133.0/29915	18.34
M E 160F2-P-152.4	152.40	66.67	25.40	27.00	62.8	69.7	74.60	49.6	8.00	133.0/29915	15.00
M T18F1-S-50	50.00	18.00	11.50	5.72	25.5	28.2	10.00	17.5	2.50	18.0/4050	1.36
M T18F3-P-50	50.00	25.00	11.50	5.72	24.0	26.4	16.50	25.0	2.03	18.0/4050	2.00
M T18F10-S-50	50.00	18.00	25.00	5.72	39.0	41.7	17.50	10.0	2.50	18.0/4050	1.90
M T40F-P-50	50.00	31.00	15.00	10.00	36.0	39.0	17.50	30.0	4.00	40.0/8992	4.33
M T28F1-P-63	63.00	30.00	18.00	7.00	34.0	37.5	20.00	30.0	3.00	28.0/6300	3.40
M T40F1-P-63	63.00	30.00	16.00	8.50	37.0	40.0	19.00	30.0	4.00	40.0/8992	3.90
M T80F2-P-63	63.00	30.00	25.00	7.00	45.2	48.7	20.00	30.0	4.00	35.0/7875	4.58
M T40F3-P-80	80.00	36.00	20.00	8.50	42.5	46.5	22.50	35.0	4.00	40.0/8992	4.81
M T40F-P-100	100.00	31.00	15.00	10.00	36.0	39.0	17.50	30.0	4.00	40.0/8992	3.14
M T40F5-P-63	63.00	36.00	20.00	10.00	42.5	46.5	35.00	22.5	4.00	40.0/8992	5.46
M T56F10-P-63	63.00	42.00	23.00	11.11	50.0	—	44.40	29.4	4.80	56.0/12600	8.20
M T80F4-P-100	100.00	50.00	28.00	14.35	55.0	59.5	32.50	57.5	5.00	120.0/26977	9.38
M T56F1-B-100	100.00	15.00	24.00	10.00	46.0	49.5	35.00	50.0	4.00	56.0/12600	3.38
M T80F2-P-100	100.00	50.00	28.00	14.35	55.0	59.5	32.50	51.5	5.00	120.0/26976	9.56
M T315F3-P-250	250.00	85.00	57.20	24.00	119.7	119.7	53.00	84.8	9.50	315.0/70815	19.85

带附板输送链

Conveyor chains with attachments

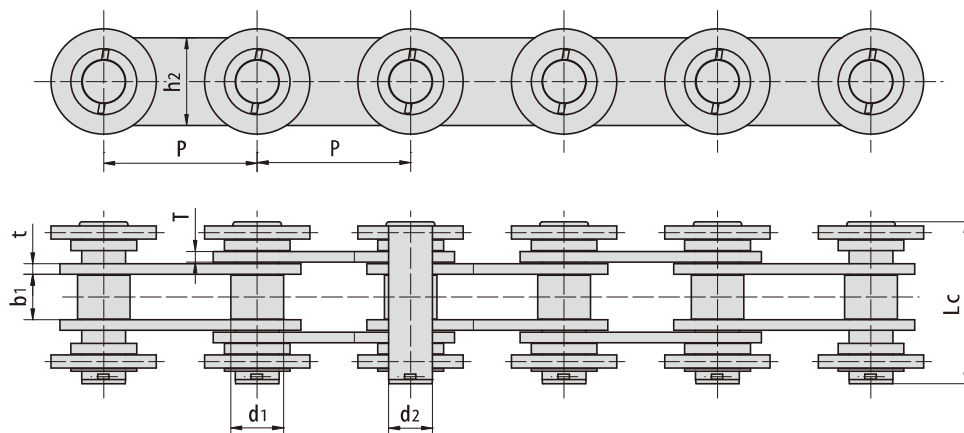

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 175F1	175.0	60.0	52.0	50.0	176.0	100.0	12.0	366.0/82280	400.0	25.5

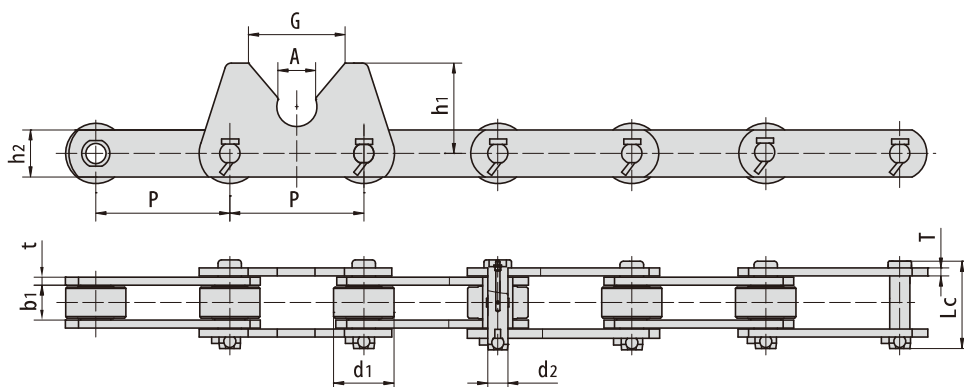


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 200F60	200.0	90.0	52.0	30.0	132.0	70.0	12.0	530.0/119148	609.0	36.9

东华链号 Donghua Chain No.	G	A	h1
	mm	mm	mm
P 200F60	144.0	56.6	135.0


带附板输送链

Conveyor chains with attachments

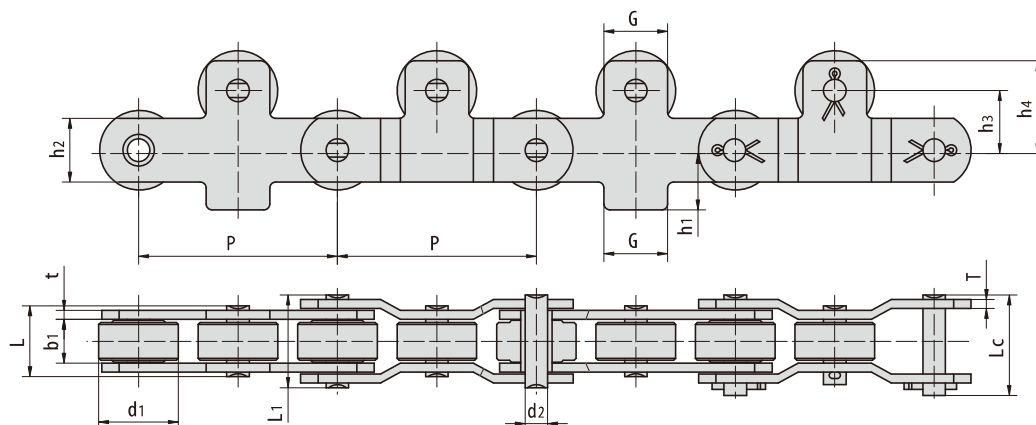

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length			链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	L1 max	Lc max	h2 max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 100F126	100.0	40.0	22.0	11.3	36.5	47.0	51.0	32.0	4.5	70.0/15736	80.0	7.7


东华链号 Donghua Chain No.	G	h1	h3	h4
	mm	mm	mm	mm
P 100F126	32.0	30.0	30.0	45.0

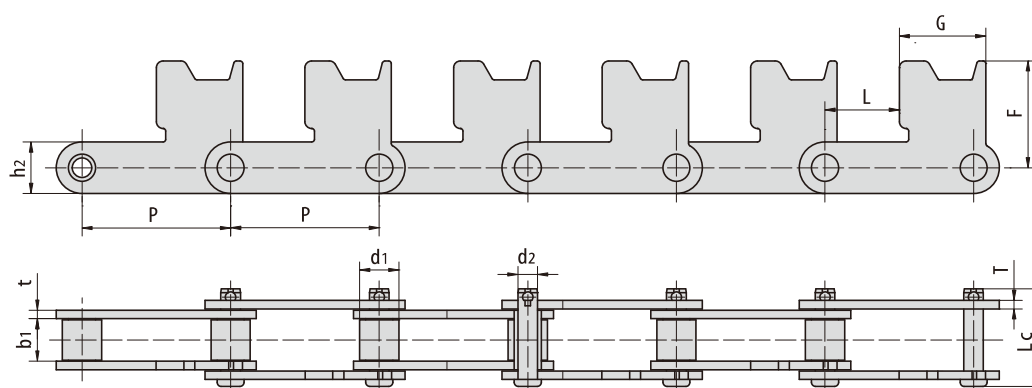

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	附件尺寸 Attachment dimension			抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	F	G	L	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 110F5	110.0	29.0	30.4	14.5	72.1	38.1	6.3	79.05	64.0	55.0	229.0/51484	250.0	8.3
P 110F21	110.0	54.0	48.0	27.0	118.0	70.0	12.0	95.00	64.0	55.0	600.0/134880	660.0	32.6

带附板输送链

Conveyor chains with attachments

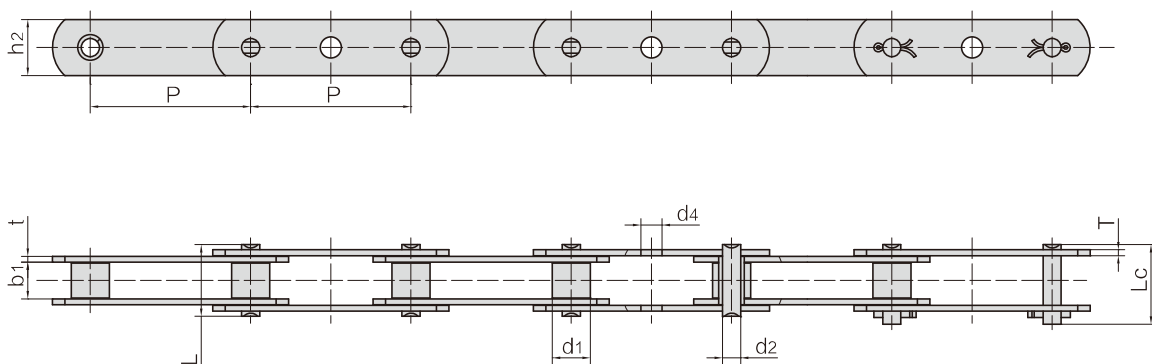

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	d ₄	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
*P30GKF1	30.00	12.00	16.00	8.00	32.80	35.50	20.00	3.00	8.00	40.0/8992	44.00	2.10
P31.75GK	31.75	10.16	10.00	5.08	22.10	24.40	15.00	2.30	7.30	21.8/4901	23.98	0.92
P44.45F10	44.45	11.91	12.70	5.94	29.20	31.50	18.00	3.00	8.10	40.0/8992	44.00	1.33
P45F5	45.00	11.91	12.57	5.94	29.20	31.60	18.00	3.25	8.00	31.8/7149	34.98	1.37
P50F22GK	50.00	12.10	11.90	5.85	26.90	28.50	17.20	2.50	8.00	25.0/5620	27.50	1.10
P50.8F67GK	50.80	12.70	11.68	5.72	22.50	25.20	18.00	1.85	6.70	29.0/6519	31.90	0.94
P60F4GKF1	60.00	16.87	19.81	7.19	35.00	38.00	19.30	2.80	8.3×8.3	39.1/8790	43.01	1.60
P60F4GKF2	60.00	16.87	19.81	7.19	35.00	38.00	19.30	2.80	12.00	39.1/8790	43.01	1.57

*套筒链：表中滚子直径d₁为套筒直径


*Bush chain: d₁ in the table indicates the external diameter of the bush.

图示中d₄孔在链条内外链节上的装配位置详见产品图纸


Assembly position of d₄ hole see product drawing

带加长销输送链


Conveyor chains with extended pins



带D1加长销
With D1 extended pin

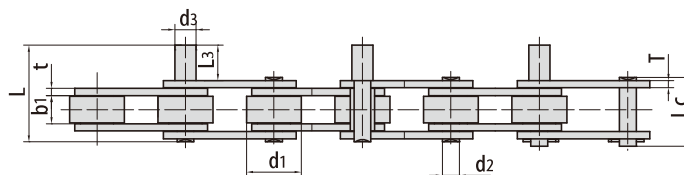

带D3加长销
With D3 extended pin

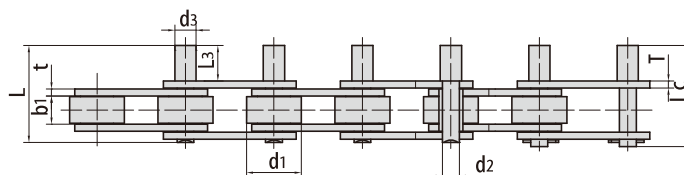


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴尺寸 Pin dimension					链板尺寸 Plate dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 max	L3	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P20F6-D3	20.00	8.51	7.75	4.45	6.00	8.00	23.80	-	11.80	1.60	18.0/4046	19.80	0.68
P30-D3F1	30.00	15.88	17.02	8.28	21.70	21.70	55.40	58.60	20.00	3.50/3.00	60.0/13488	66.00	2.66
P31.75F9-D1	31.75	11.91	12.57	5.94	12.70	40.00	67.90	70.50	18.00	3.25	31.8/7149	34.98	2.22
P38.1F24-D1	38.10	25.00	12.00	7.92	12.00	40.00	71.70	15.30	20.00	4.00	55.0/12364	60.50	3.46
P41.3F18-D1F1	41.30	25.00	10.00	9.00	12.00	25.00	50.00	52.80	22.00	3.00	45.0/10116	49.50	2.56
P47-D1F1	47.00	31.00	16.00	7.92	12.00	27.50	59.00	62.80	24.00	3.10	56.7/12746	62.37	3.92
P50F3-D3F1	50.00	31.00	15.00	9.53	12.00	20.00	53.70	57.20	25.00	4.00	83.0/18659	91.30	4.45
P50F3-D3F2	50.00	31.00	15.00	9.53	12.00	45.00	78.80	82.20	25.00	4.00	83.0/18659	91.30	4.89
P50.8F24-D3	50.80	25.40	11.68	5.72	12.00	27.55	49.30	52.00	17.80	1.85	29.0/6519	31.90	1.84
P50.8F34-D1	50.80	30.50	14.50	10.00	14.80	27.00	61.20	64.10	25.00	4.00	60.0/13488	66.00	4.18
P54.75-D1	54.75	28.00	15.25	11.25	11.25	38.10	76.40	80.40	25.50	4.80	65.0/14612	71.50	3.89
*P60F11-D3	60.00	12.00	11.50	5.30	10.00	45.00	66.90	69.70	20.00	2.03	25.0/5620	27.50	1.40
P63F20-D3	63.00	11.91	12.57	5.94	5.94	40.00	66.70	69.50	20.00	3.00	31.1/6991	34.20	1.35
P63.5F31-D3	63.50	39.68	21.00	12.00	M 10	24.00	75.30	-	32.00	6.00	80.0/17984	88.00	7.57

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush.


纺织机械用链条

Roller chains for textile machinery

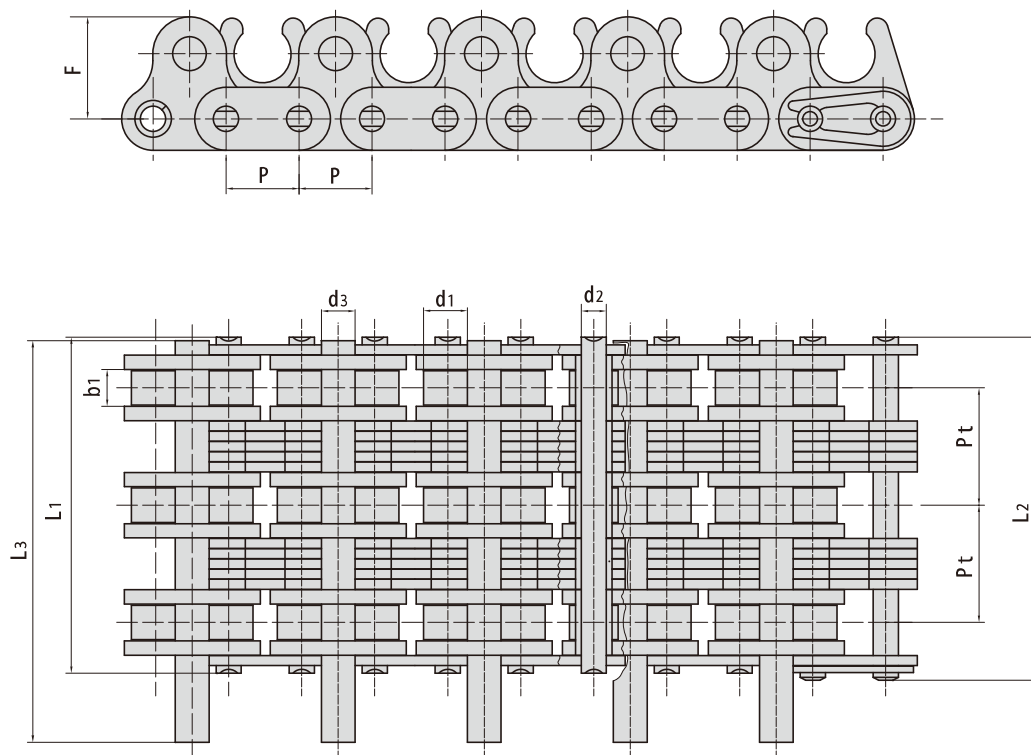

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			附板尺寸 Attachment dimension	排距 Transverse pitch	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ max	L ₁ max	L ₂ max	L ₃ max	F	Pt	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
06BF20	9.525	6.35	4.6	3.28	4.45	43.75	44.85	52.4	13.0	15.0	24.9/5682	2.77

夹膜链 Grip chains

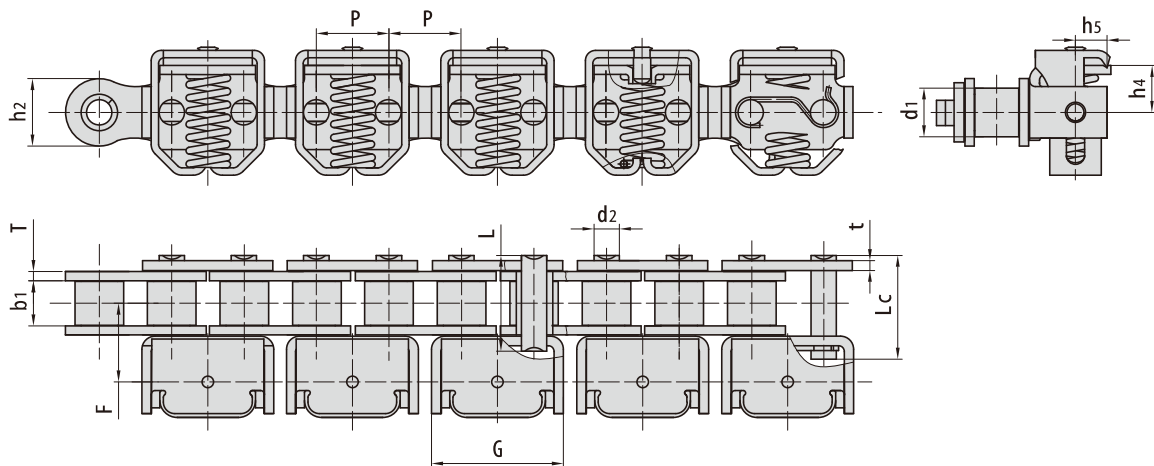


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附件尺寸 Attachment dimension				抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	p	$d_{1\max}$	$b_{1\min}$	$d_{2\max}$	$L_{\max}$	$L_{c\max}$	$h_{2\max}$	T/t	h_4	h_5	F	G	$Q_{\min}$	Q_0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
08B-GC	12.7	8.51	7.75	4.45	16.7	18.2	11.8	1.60	8.5	5.5	13.7	19.8	18.00/4046	19.80	1.20




夹膜链

Grip chains

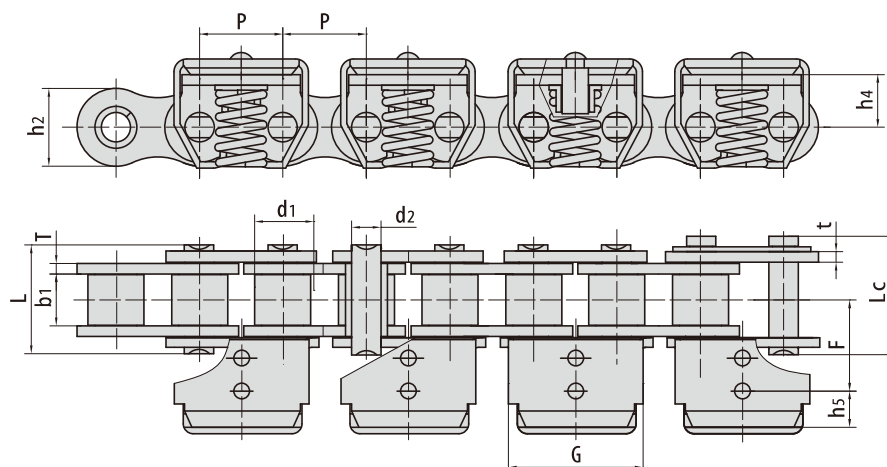


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附件尺寸 Attachment dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc	h2 max	T/t	h4	h5	F	G	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
08BSSF32	12.7	8.51	7.75	4.45	16.7	18.2	11.8	13.8	8.0	6.5	13.8	20.4	12.0/2727	1.14

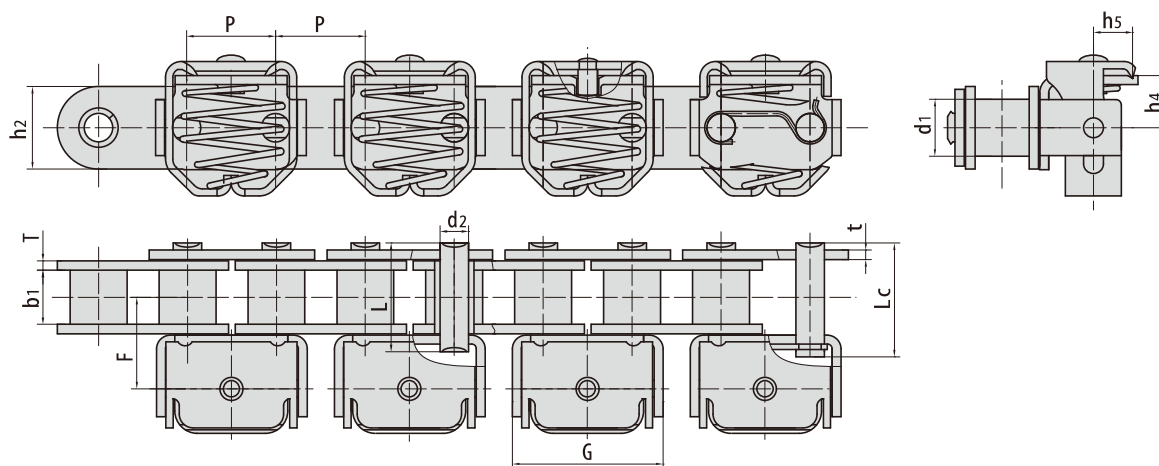

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附件尺寸 Attachment dimension				抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T/t	h4	h5	F	G	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
10B-GC	15.875	10.16	9.65	5.08	19.3	20.7	14.7	1.70	9.0	7.0	16.4	16.9	22.40/5036	24.64	1.60


拖板链

Articulated bottomplate chains

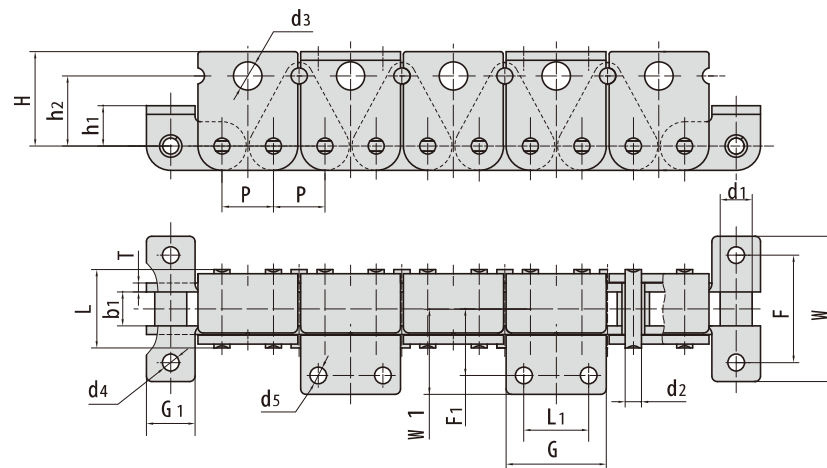

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates		销轴直径 Pin diameter	销轴长度 Pin length	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min		d ₂ max	L max	Q min	q
	mm	mm	mm		mm	mm	KN/bf	kg/m
12AH-TB35	19.05	11.91	12.57		5.94	29.2	31.8/7227	4.35


东华链号 Donghua Chain No.	H	h ₂	d ₃	F	W	G ₁	h ₁	d ₄	T	F ₁	W ₁	L ₁	G	d ₅
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
12AH-TB35	35.0	26.0	10.5	40.0	54.0	18.0	15.0	6.2	3.25	24.8	31.8	24.0	37.0	6.2

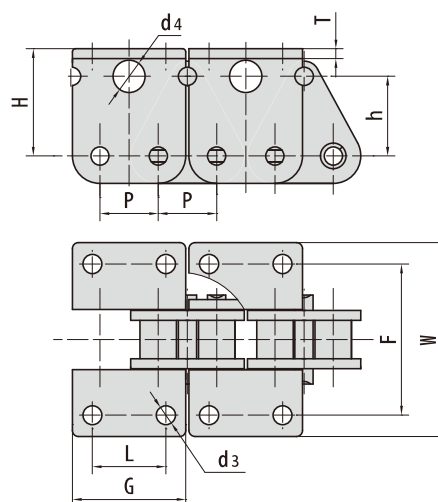


东华链号 Donghua Chain No.	P	L	G	F	W	H	h	d ₃	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
12AH-TB35F1	19.05	24.00	37.00	49.60	63.60	35.00	23.50	6.20	-	3.25

纸卷用输送链

Conveyor chains for paper mill

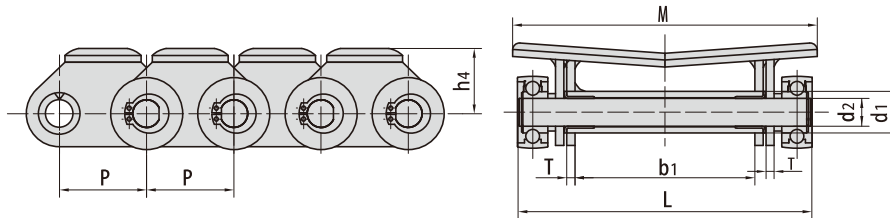

东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板厚度 Plate thickness	附板尺寸 Attachment dimension		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	T max	M	h4	Q min	Q ₀ min
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN
63PF2	63.0	30.0	130.0	20.0	213	6.0	220.0	50.0	160.0/35968	176.0
63PF4	63.0	30.0	160.0	20.0	243	6.0	250.0	50.0	160.0/35968	176.0
63PF5	63.0	30.0	110.0	20.0	193	6.0	200.0	50.0	160.0/35968	176.0
63PF11	63.0	30.0	230.0	20.0	313	6.0	320.0	50.0	160.0/35968	176.0

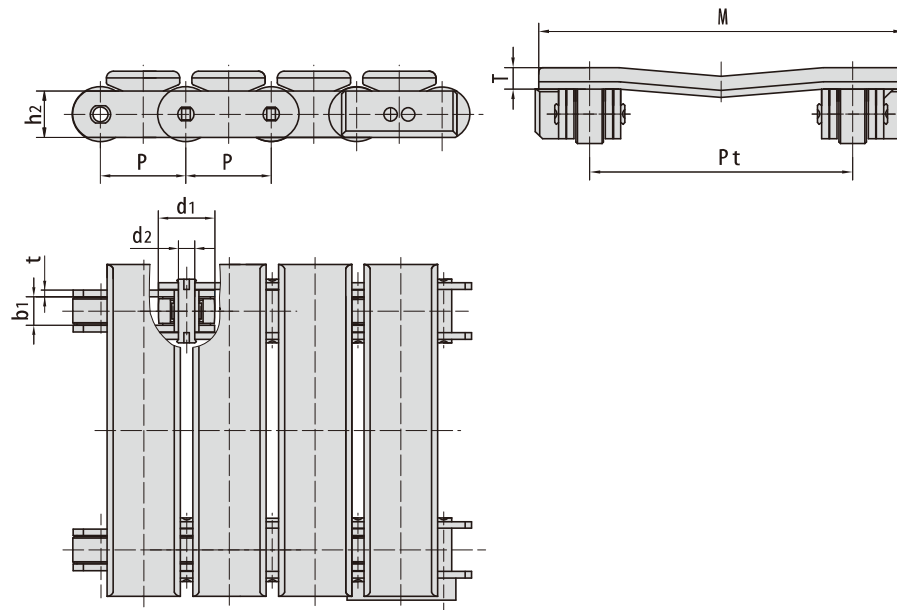


东华链号 Donghua Chain No.	节距 Pitch	内节内宽 Width between inner plates	销轴直径 Pin diameter	滚子直径 Roller diameter	链板高度 Plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension			抗拉强度 Tensile strength
	P	b1 min	d2 max	d1 max	h2 max	t max	Pt	T	M	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P63F16	63.0	21.5	12.0	42.0	35.0	5.0	180.0	15.0	250.0	120.0/26994
P63F25	63.0	24.0	14.0	42.0	35.0	5.0	180.0	15.0	250.0	100.0/22495
*P63.5F23	63.5	19.0	11.5	40.0	35.0	5.0	236.0	15.0	300.0	100.0/22495

*表示滚轮不带轴承


*M means no bearing inside roller

纸卷用输送链

Conveyor chains for paper mill

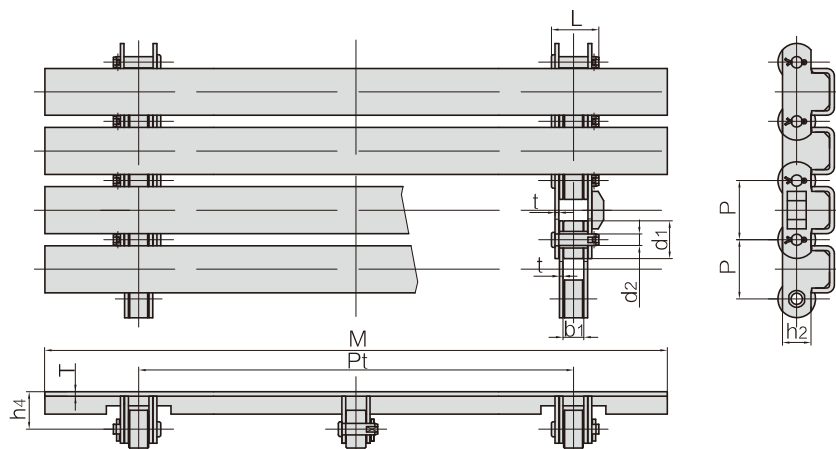


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate height	链板厚度 Plate thickness	附板尺寸 Attachment dimension				抗拉强度 Tensile strength
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	h _{2 max}	t _{max}	Pt	M	h ₄	T	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P63F40	63.0	40.0	22.0	12.0	51.0	30.0	4.0	600	800	40	5	63.0/14162

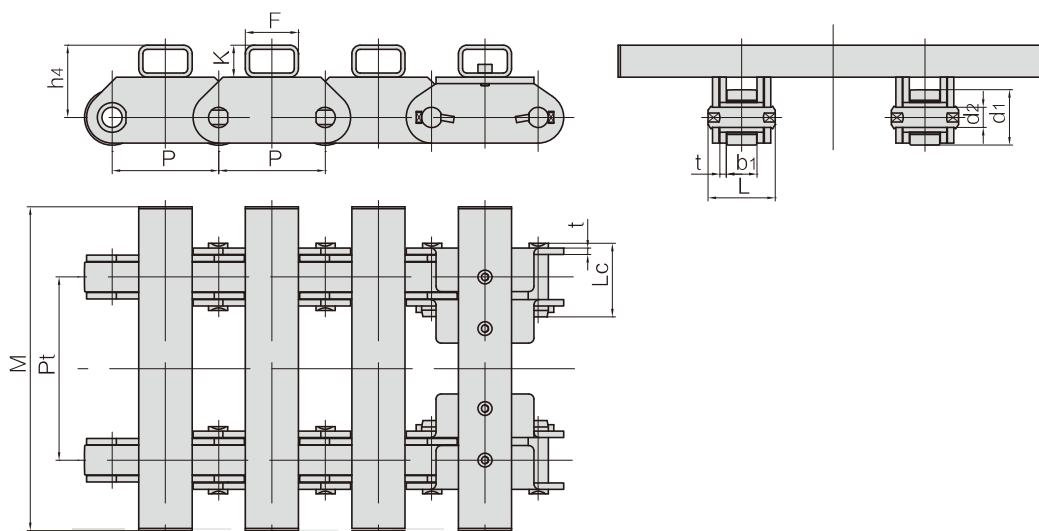


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	附板尺寸 Attachment dimension					抗拉强度 Tensile strength
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	t _{max}	F	K	Pt	M	h ₄	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P100F361	100	52.0	29.0	19.0	63.0	69.0	6.0	50	30	572	804	68	200.0/44960

纸卷用输送链

Conveyor chains for paper mill

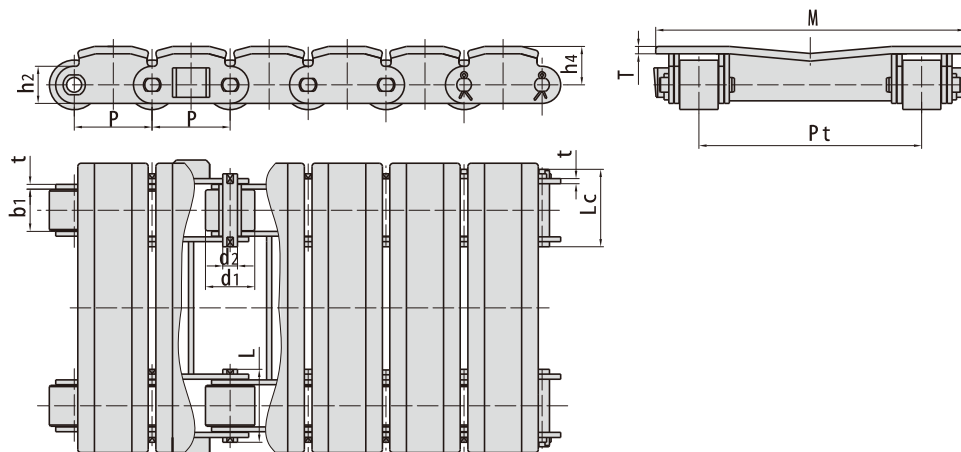




东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension				抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t max	Pt	M	h4	T	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
FV63F18-P-63	63.0	40.0	22.0	12.0	45.6	50.0	30.0	4.0	180	240	31	6	86.7/19490

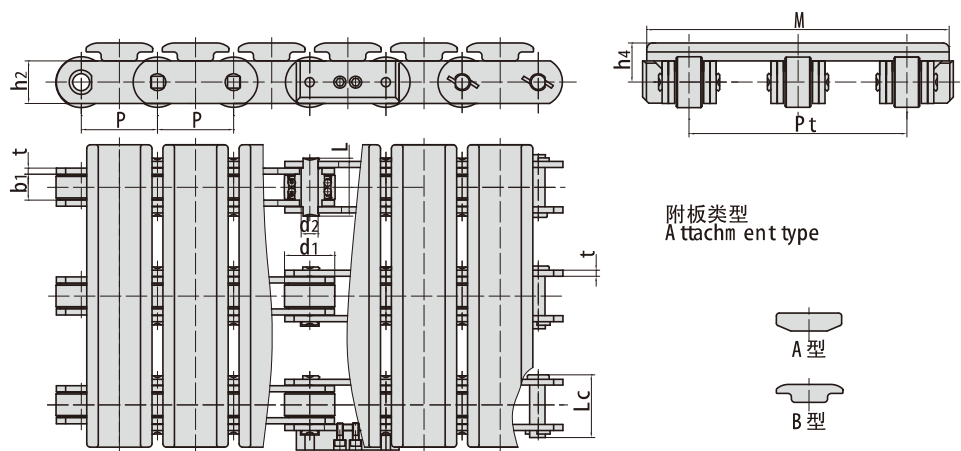

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension				抗拉强度 Tensile strength	附板类型 Attachment type
	P	d1 max	b1	d2 max	L max	Lc max	h2 max	t max	Pt	M	h4	T	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	
P63F33	63	42.0	24.0	14.0	51.0	56.0	35.0	5.0	1130	1200	32.5		100.0/22480	A
P63F45														B

纸卷用输送链


Conveyor chains for paper mill

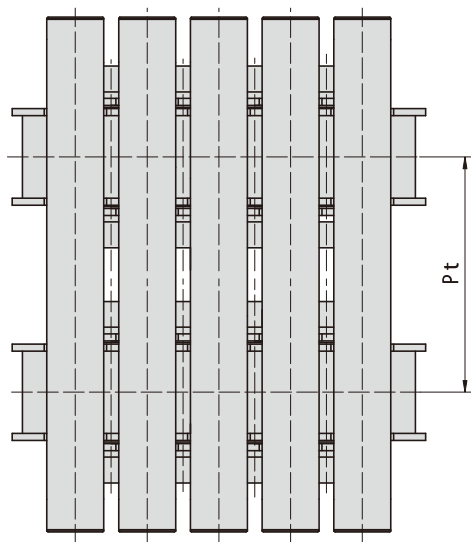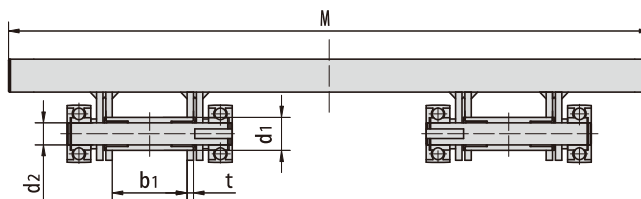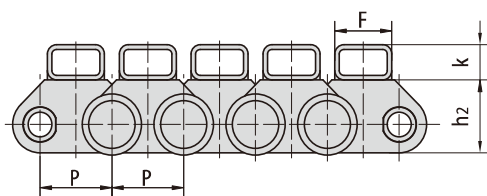


东华链号 Donghua Chain No.	节距 Pitch	内节内宽 Width between inner plates	销轴直径 Pin diameter	套筒直径 Bush diameter	链板高度 Plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension				抗拉强度 Tensile strength
	P	b1 min	d2 max	d1 max	h2 max	t max	F	K	P t	M	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
P 63F23	63.0	70.0	20.0	30.0	61.8	6.0	50.0	30.0	688.0	1200.0	160.0/35993

印铁烘房线链条

Conveyor chains for metal decorating system

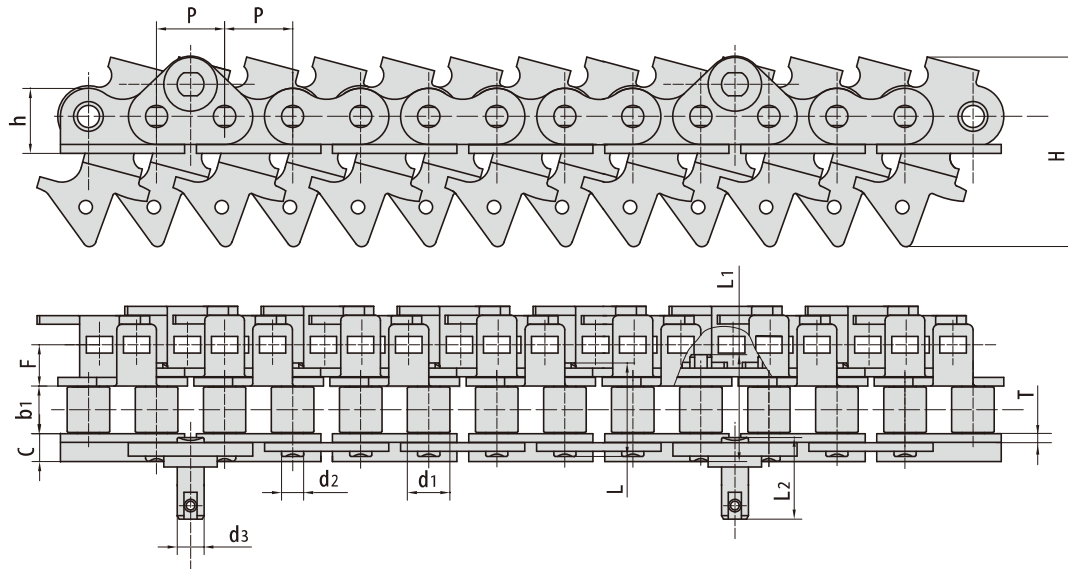


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plates dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	T	H	F	C	Q _m n
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF90	25.4	15.88	15.75	7.92	10.0	32.7	38.4	43.1	28.3	3.25	70.0	14.5	10.00	55.6/12499
HX16AF42	25.4	15.88	19.00	7.92	10.0	35.6	41.0	43.4	24.3	3.10	70.6	14.5	10.15	54.0/12139
16BF10	25.4	15.88	19.00	8.28	10.0	36.1	41.0	43.1	25.0	3.10	70.5	15.5	10.15	40.0/9090
16BF27	25.4	15.88	19.00	8.28	10.0	36.1	41.0	43.1	25.0	3.10	85.0	17.0	10.15	40.0/9090
16BF57	25.4	15.88	19.00	7.92	10.0	36.5	41.4	43.1	28.3	3.25	70.0	14.5	10.00	54.0/12139
HX16BF2	25.4	15.88	19.00	7.92	10.0	35.6	41.0	47.5	24.3	3.10	70.6	14.5	10.15	54.0/12139
HX16BF8	25.4	15.88	19.00	8.28	10.0	36.1	41.0	43.4	25.0	3.10	70.5	15.5	10.15	54.0/12139
HX16BF27	25.4	15.88	19.00	8.28	10.0	36.1	41.0	43.1	25.0	3.10	70.5	18.5	10.15	56.0/12589

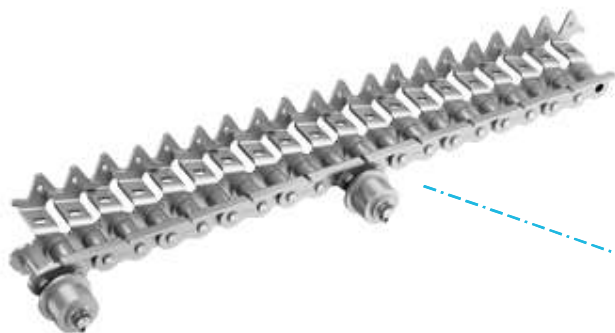


印铁烘房线链条

Conveyor chains for metal decorating system

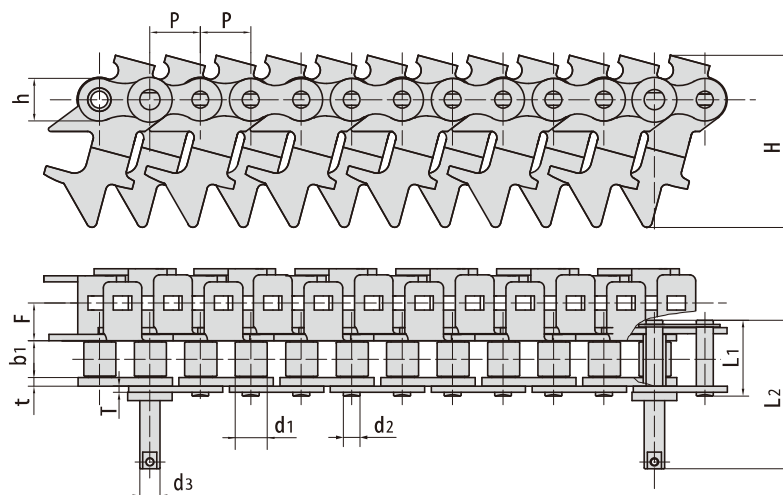


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板尺寸 Plate dimension			装配尺寸 Assembly dimension		抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L1 max	L2 max	h	T	t	H	F	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF86	25.4	15.88	15.75	7.92	10.0	36.5	76.7	24.0	3.25	3.25	70.0	14.6	55.6/12499
16BF12	25.4	15.88	18.00	8.28	10.0	37.4	73.2	21.0	3.10	4.15	85.0	18.5	40.0/8992

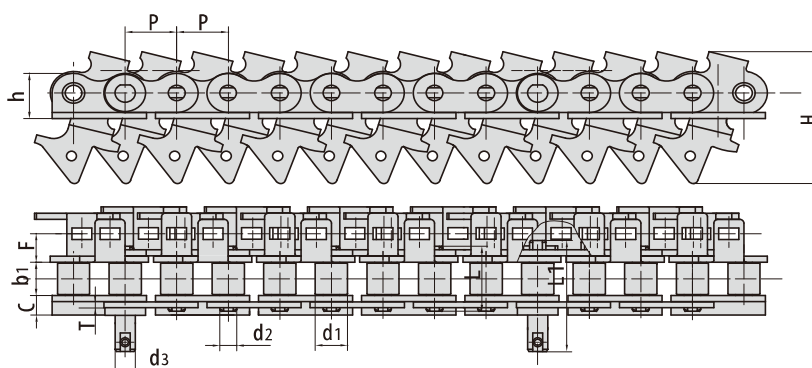


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板尺寸 Plate dimension			装配尺寸 Assembly dimension		抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L	L1	h	T	H	F	C	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF27	25.4	15.88	15.75	7.92	10.0	32.7	75.2	28.3	3.25	71.0	14.6	13.0	40.0/8992
HX16AF32	25.4	15.88	15.75	7.92	10.0	40.9	81.1	28.3	3.25	69.5	29.7	12.0	55.6/12499
HX16AF4	25.4	15.88	17.00	7.92	10.0	40.9	79.1	27.5	4.00	67.8	17.5	11.0	55.6/12499
HX16AF29	25.4	15.88	15.75	7.92	10.0	32.7	76.7	28.3	3.25	70.6	14.6	10.0	55.6/12499
HX16BF10	25.4	15.88	19.00	8.28	10.0	36.1	79.5	25.0	3.10	70.6	15.5	10.15	40.0/8992

印铁烘房线链条

Conveyor chains for metal decorating system

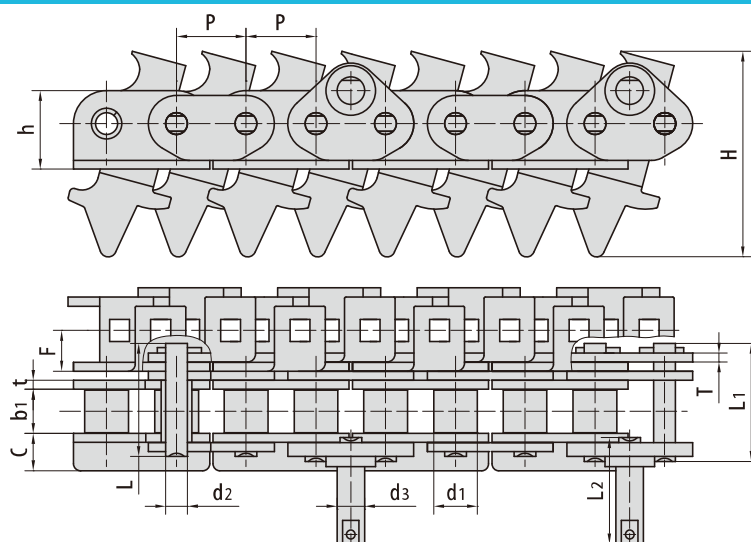


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3	L max	L1 max	L2 max	h	t/T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF10	25.4	15.88	15.75	7.92	10.0	43.4	44.9	43.1	28.3	3.25	70.3	14.6	10.0	55.6/12499

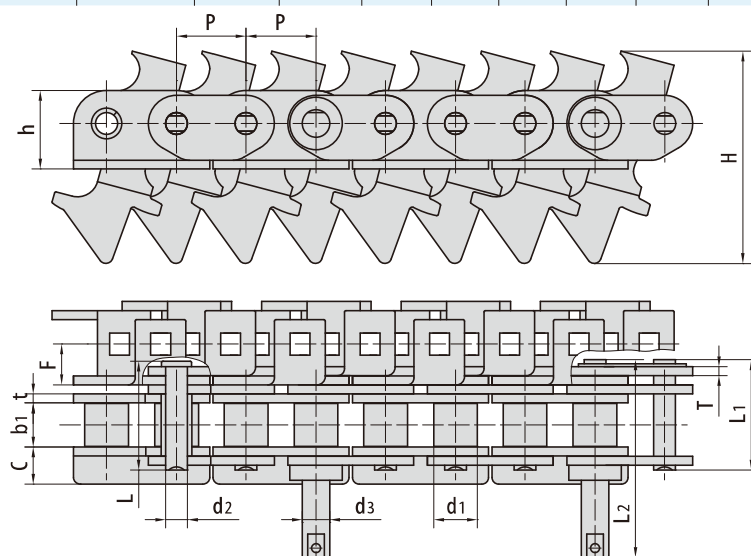


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3	L max	L1 max	L2 max	h	t/T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF27	25.4	15.88	15.75	7.92	10.0	41.9	41.8	82.1	28.3	3.25	70.6	15.6	10.0	55.6/12499
HX16AF60	25.4	15.88	15.75	7.92	10.0	41.5	40.9	81.1	28.3	3.25/3.0	70.5	15.4	10.0	55.6/12499

印铁烘房线链条

Conveyor chains for metal decorating system

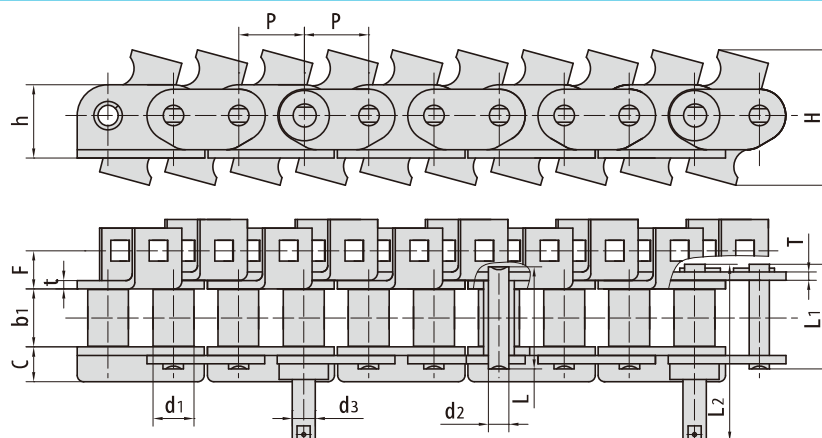


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	t/T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF7	25.4	15.88	15.75	7.92	7.92	—	36.5	67.9	28.3	3.25	59.1	13.5	13.0	40.0/8992
16AF73	25.4	15.88	15.75	7.92	10.0	32.7	36.5	73.3	28.3	3.25	52.7	16.0	10.0	55.6/12499
HX16AF30	25.4	15.88	25.00	7.92	10.0	45.2	48.4	88.8	28.4	4.00	52.8	16.0	12.0	56.7/12746
HX16AF38	25.4	15.88	15.75	7.92	7.92	32.7	36.5	73.3	28.3	3.25	52.7	16.0	10.0	55.6/12499
HX16AF43	25.4	15.88	19.00	7.92	10.0	39.4	42.5	81.3	25.3	4.00	53.5	16.4	11.5	54.0/12139
HX16AF54	25.4	15.88	15.75	7.92	11.3	—	36.5	79.0	28.3	3.25	62.3	19.0	10.0	55.6/12499

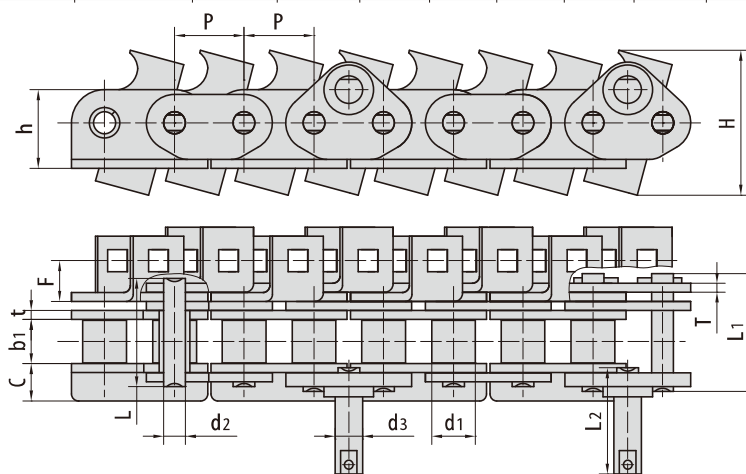


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	t/T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF37	25.4	15.88	15.75	7.92	10.0	43.4	44.9	43.1	28.3	3.25/3.0	53.4	16.1	10.0	55.6/12499

印铁烘房线链条

Conveyor chains for metal decorating system

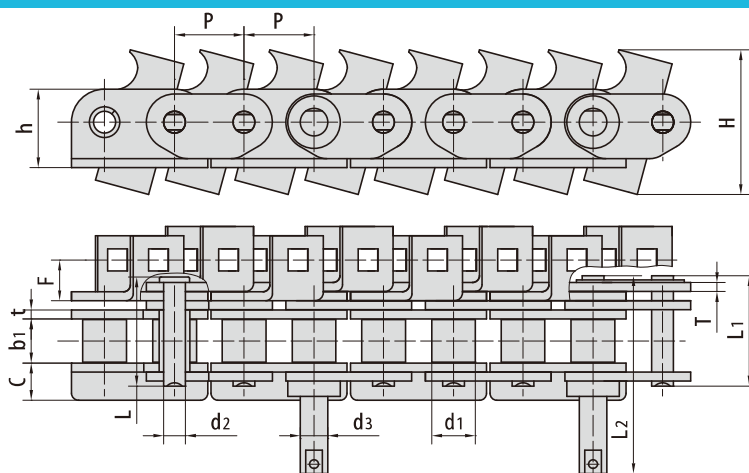


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	t/T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF10	25.4	15.88	15.75	7.92	10.0	41.5	40.9	80.8	28.3	3.25/3.0	44.3	14.5	10.0	55.6/12499
HX16AF49	25.4	15.88	15.75	7.92	10.0	41.5	40.9	80.8	28.3	3.25/3.0	53.4	16.1	10.0	55.6/12499
HX16AF51	25.4	15.88	15.75	7.92	10.0	41.5	40.9	81.1	28.3	3.25/3.0	44.3	15.2	10.0	55.6/12499
HX16AF61	25.4	15.88	15.75	7.92	10.0	41.5	40.9	81.1	28.3	3.25/3.0	53.7	15.6	10.0	55.6/12499
HX16AF24	25.4	15.88	19.00	7.92	10.0	44.8	44.2	84.4	28.3	3.25/3.0	53.4	16.1	10.0	55.6/12499
HX16AF25	25.4	15.88	19.00	7.92	10.0	44.8	44.2	84.4	28.3	3.25/3.0	53.7	14.8	10.0	55.6/12499

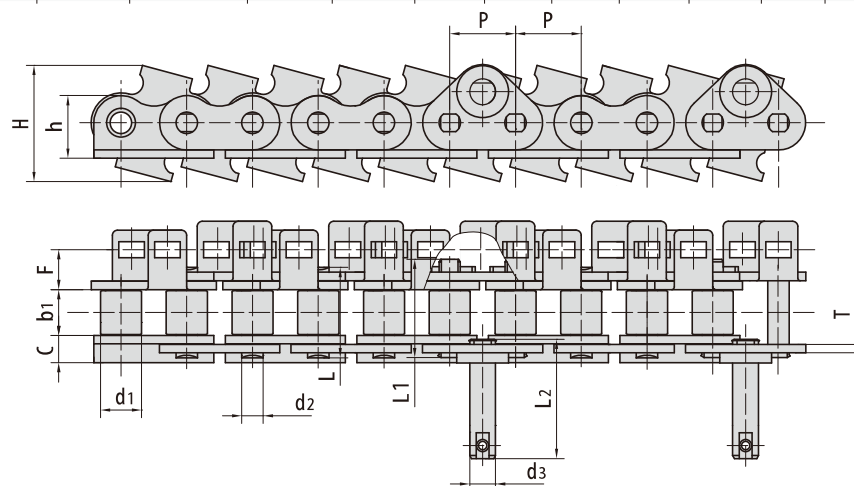


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1	b1	d2	d3	L	L1	L2	h	T	H	F	C	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
H X 16AF16	25.4	15.88	19.0	7.9	9.5	37.6	43.0	43.4	30.45	4.00	44.8	12.3	11.5	54.0/12148

印铁烘房线链条

Conveyor chains for metal decorating system

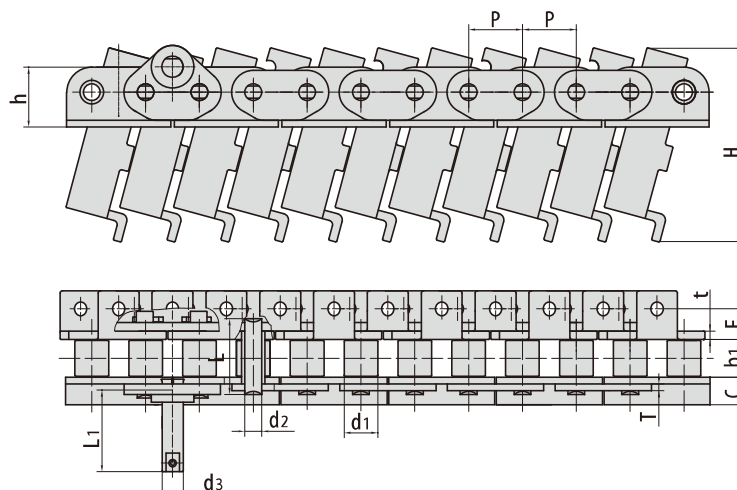


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板尺寸 Plate dimension			装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L	L1	h	T	t	H	F	C	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
16AF18	25.4	15.88	17.00	7.92	10.0	36.2	48.6	28.3	3.25	4.0	92.0	14.7	13.0	40.0/8992

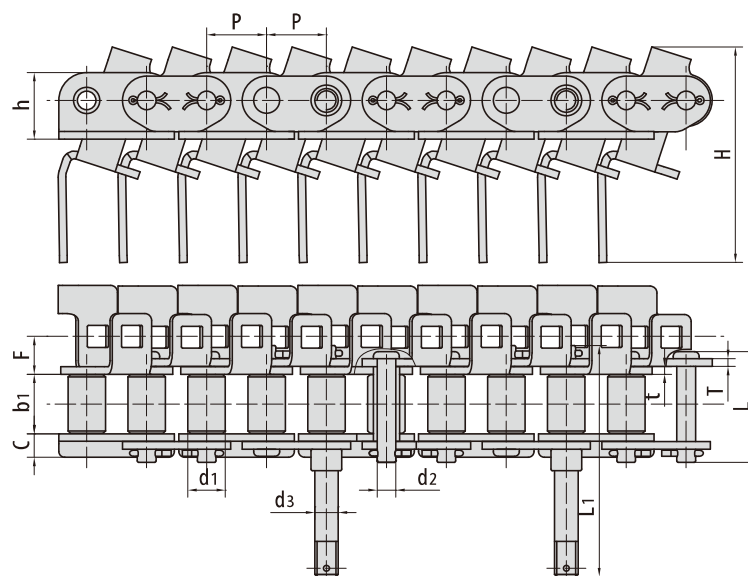


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ max	L	L ₁	h	t/T	H	F	C	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF13	25.4	15.88	25.00	7.92	10.0	47.0	98.0	28.3	3.25	91.8	16.05	10.0	55.6/12499

印铁烘房线链条

Conveyor chains for metal decorating system

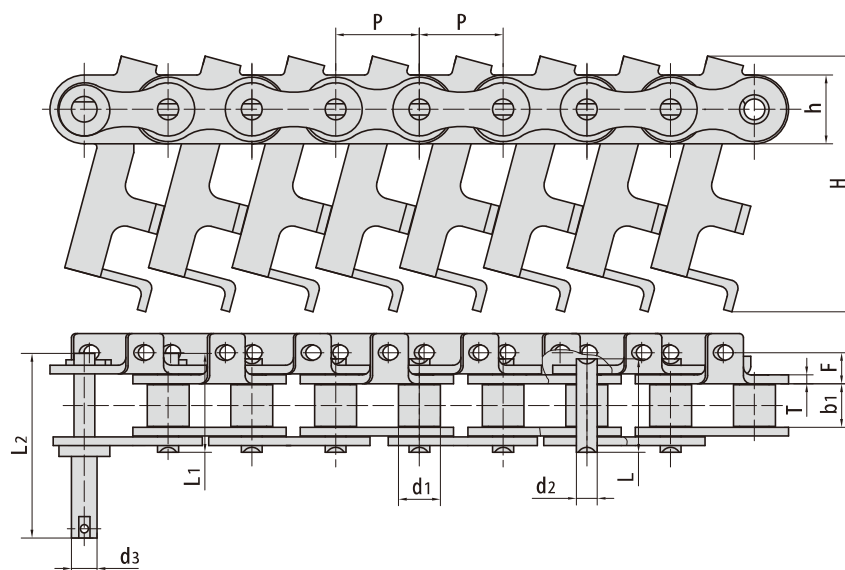


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension		抗拉强度 Tensile strength
	P	d1	b1	d2	d3	L	L1	L2	h	T	H	F	Q_{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HXP31.75	31.75	15.88	17.80	7.92	10.0	36.2	38.4	73.7	26.0	3.25	96.9	14.7	55.6/12499

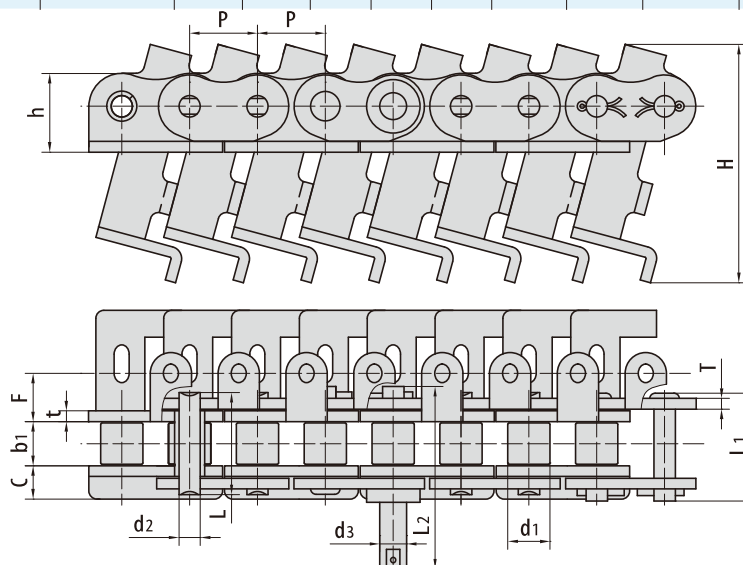


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	t/T	H	F	C	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF56	25.4	15.88	16.00	7.92	10.0	37.7	42.9	86.0	29.3	4.00	89.2	19.1	12.3	68.9/15488

印铁烘房线链条

Conveyor chains for metal decorating system

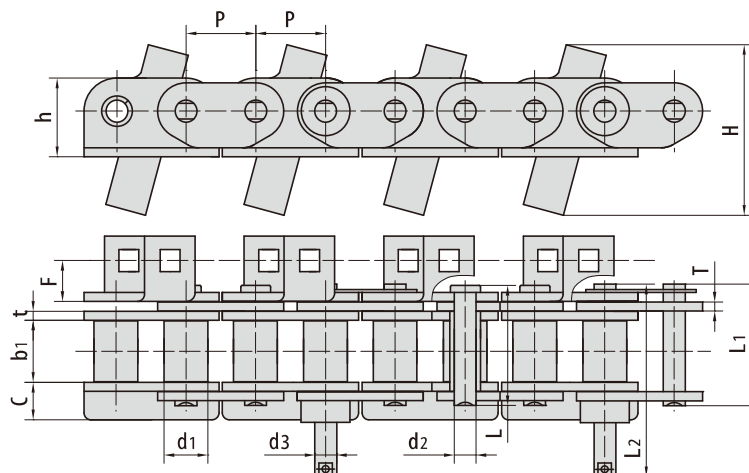



东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		装配尺寸 Assembly dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L max	L1 max	L2 max	h	t/T	H	F	C	Q _m min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HX16AF39	25.4	15.88	15.75	7.92	10.0	38.5	38.7	79.0	28.3	3.25	64.8	14.5	10.0	55.6/12499
HX16AF47	25.4	15.88	15.75	7.92	10.0	-	39.5	80.5	28.3	3.25	64.8	14.5	10.0	55.6/12499

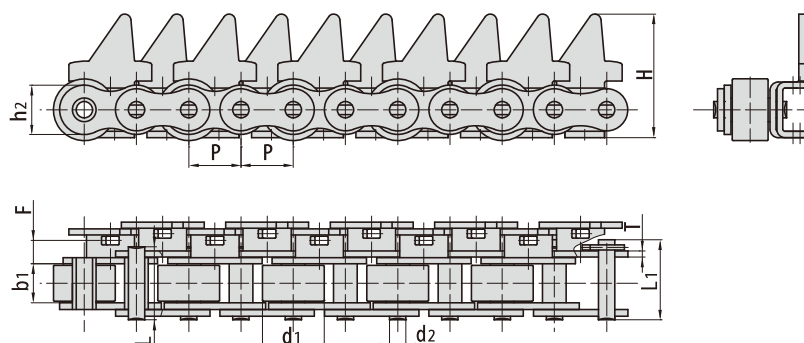


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		装配尺寸 Assembly dimension		抗拉强度 Tensile strength
	P	d1	b1	d2	L	L1	h2	T	H	F	Q _m min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
HXP25.4F1	25.4	30.00	19.00	7.92	35.6	38.9	20.5	3.0	60.00	30.55	55.6/12499

顶板输送链

Top plate conveyor chains

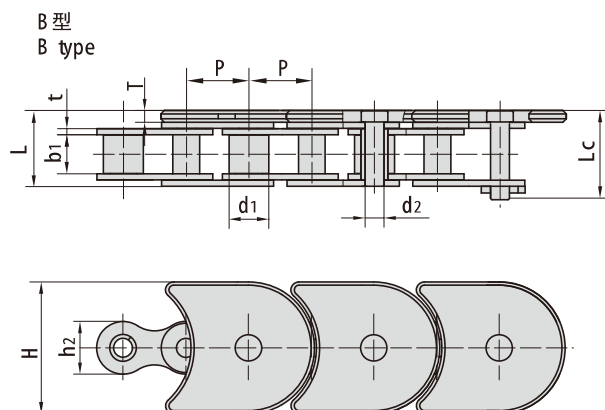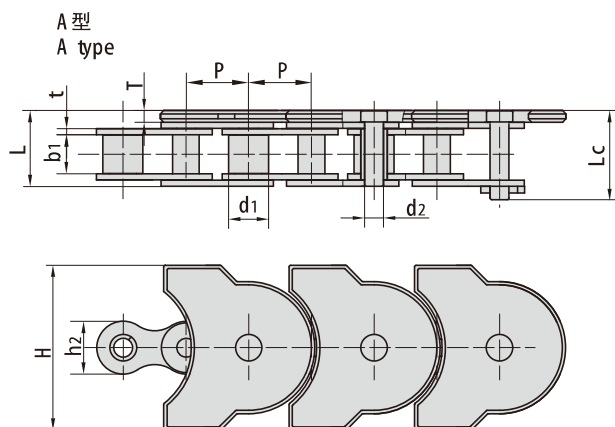


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		附板尺寸 Attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter	型式 Type
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t	H	T	Q _{min}	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m	
T0 S50	19.05	12.07	11.68	5.72	23.3	27.28	16.0	1.85	50	3.50	29.0/6591	2.35	A
T0 S50F1	25.40	12.07	11.68	5.72	22.8	27.28	21.0	1.85	50	3.50	29.0/6591	2.95	B
T0 S80	38.10	15.88	15.75	7.92	32.4	-	27.3	3.25	82.6	3.25	55.6/12636	4.91	B

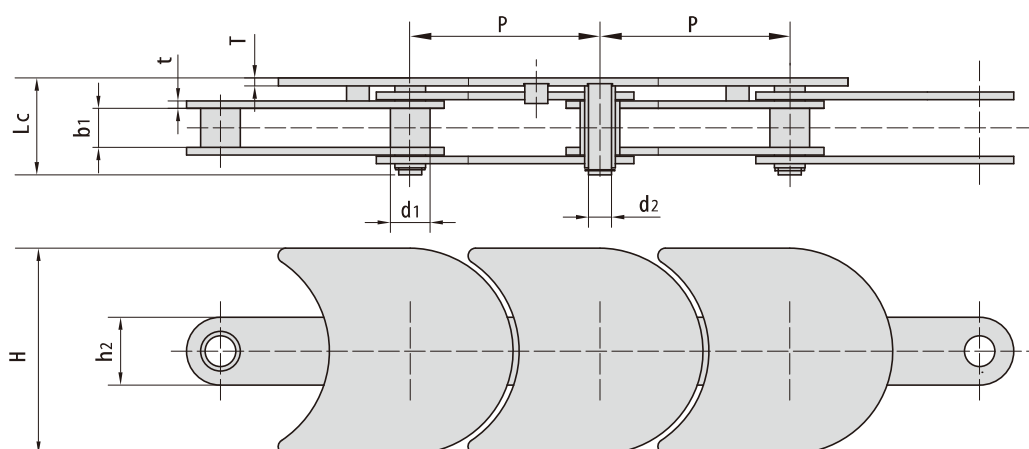


东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		附板尺寸 Attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t	H	T	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
76HP	76.2	15.92	15.7	9.2	37.5	27.3	3.0	82.6	3.0	45.0/10227	2.76

顶板输送链

Top plate conveyor chains

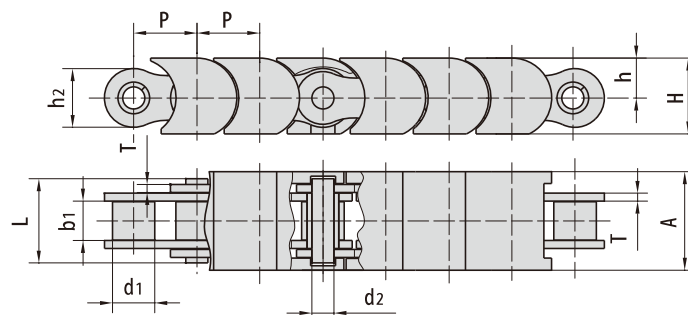


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		塑料件尺寸 Plastic attachment dimension			抗拉强度 Tensile strength
	P	d1 max	b1 min	d2 max	L max	h2 max	T max	A	h	H	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf
08B-TP	12.700	8.51	7.75	4.45	16.7	11.8	1.60	19.8	8.0	15.2	18.0/4091
10B-TP	15.875	10.16	9.65	5.08	19.5	14.7	1.70	24.8	9.5	17.5	22.4/5091
12B-TP	19.050	12.07	11.68	5.72	22.5	16.0	1.85	29.8	11.0	19.8	29.0/6591

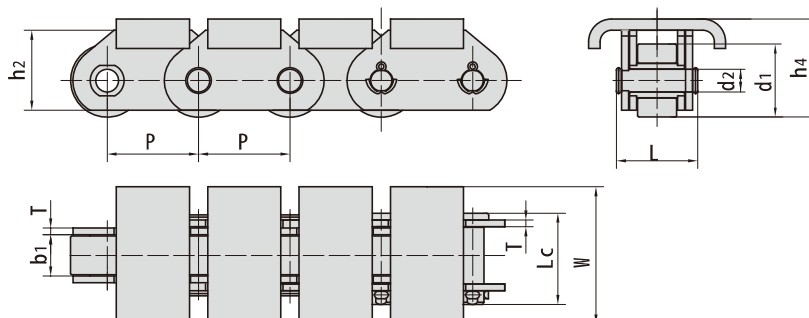


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	附件尺寸 Attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	W	h4	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P40F3	40.0	32.0	18.0	10.00	36.1	40.2	35.0	3.0	60.0	43.00	40.0/9091	7.27
P40F5	40.0	32.0	18.0	10.00	36.1	40.2	35.0	3.0	59.5	42.00	40.0/9091	7.16
P63F6	63.0	48.0	25.0	14.00	52.0	57.0	45.0	5.0	130.0	56.50	63.0/14172.3	16.22
P63F9	63.0	48.0	25.0	14.00	52.0	57.0	45.0	5.0	80.0	56.50	63.0/14172.3	13.66
P63F26	63.0	48.0	25.0	14.00	56.0	61.0	45.0	6.0	95.0	56.50	70.0/15736	14.10
P63F15	63.0	40.0	20.0	12.00	43.2	47.0	40.0	4.0	90.0	30.00	60.0/13488	12.14
P63F31	63.0	48.0	25.0	14.00	52.0	57.0	45.0	5.0	105.0	55.50	120.0/26976	14.05
P63F32	63.0	48.0	25.0	14.00	56.0	61.0	45.0	6.0	110.0	56.50	70.0/15736	16.80
P76.2F19	76.2	38.1	27.5	11.10	59.1	63.5	35.0	6.4	63.5	50.05	150.0/33721	11.35
P76.2F27	76.2	47.6	19.0	19.05	69.5	77.0	50.0	10.0	82.0	78.80	90.0/20232	15.47
P100F174	100.0	48.0	25.4	14.00	59.0	63.4	44.5	6.4	101.6	54.90	90.0/20232	14.05

双向活动链 Double flex chains

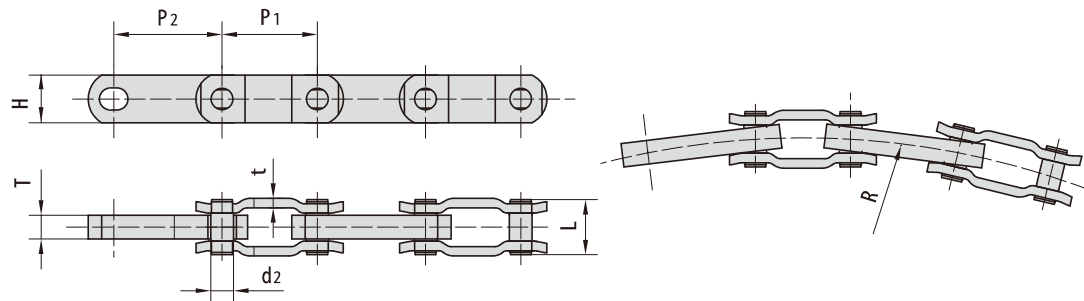


东华链号 Donghua Chain No.	节距 Pitch	节距 Pitch	内链板厚度 Thickness of inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		侧弯半径 Side bow radius	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P ₁	P ₂	T	d ₂ max	L max	H max	t	R min	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
3500	63.5	76.2	15.9	14.27	37.0	32.0	6.3	508.0	160.0/36363	196.0	5.14

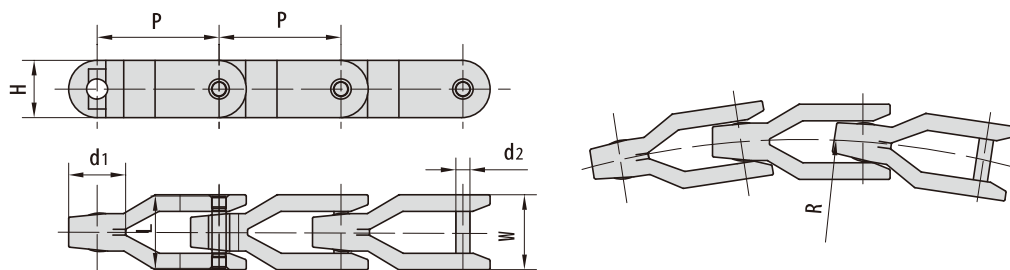


东华链号 Donghua Chain No.	节距 Pitch	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension			侧弯半径 Side bow radius	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d ₂ max	L	H max	W max	d ₁	R min	Q min	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
CC 1400	81.3	9.5	48.0	38.5	50.0	38.0	500	30.0/6818	1.99

空心销轴输送链 Hollow pin conveyor chains

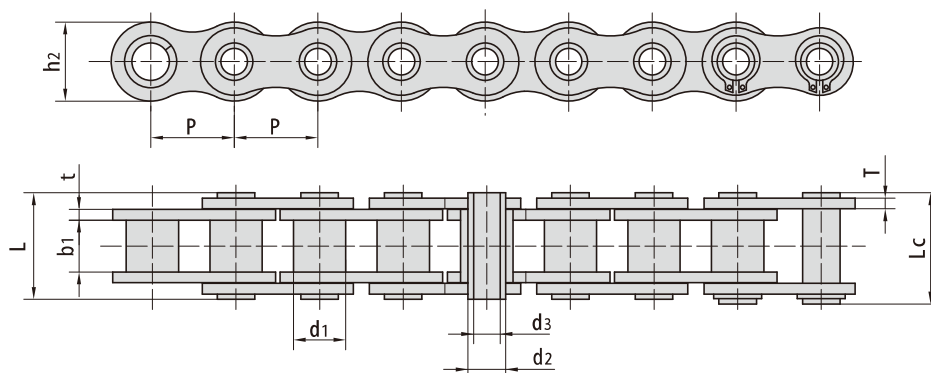


东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
08BHPF	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.60/1.30	11.1/2523	12.10	0.56
08BHPF5	12.700	8.51	7.75	6.30	4.50	16.8	18.0	12.00	1.60	9.6/2182	10.60	0.62
08BHPF9	12.700	8.51	7.75	6.30	4.50	16.5	17.6	12.10	1.50	10.5/2360	11.55	0.58
10BHPF3	15.875	10.16	9.65	7.02	5.13	19.5	20.5	14.70	1.70	10.0/2272	11.50	0.86
10BHPF4	15.875	10.16	9.50	7.20	5.00	19.8	21.3	14.00	2.03/1.60	12.5/2840	14.00	0.82
12BHPF2	19.050	12.07	11.68	8.09	6.00	22.7	23.9	16.10	1.85	14.0/3180	16.00	0.82
12BHPF3	19.050	12.07	11.70	8.22	5.75	23.6	24.9	16.20	2.42/1.85	16.0/3636	18.00	1.14
16BHPF3	25.400	15.88	17.02	11.50	8.20	35.3	37.0	23.20	4.00/3.10	49.0/11136	52.20	2.26
16BHPF4	25.400	11.70	13.50	8.00	4.30	28.9	30.2	21.30	3.00	30.0/6818	33.00	1.81
40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.20	0.54
08BHPF7	12.700	8.51	9.20	6.55	4.10	17.8	19.0	11.80	1.60	11.1/2523	12.10	0.64
08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.30	11.1/2523	12.10	0.52
50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.60	0.91
50HPF4	15.875	10.16	8.80	7.03	5.13	19.9	21.1	15.09	2.03	18.0/4180	19.20	0.89
50H-HP	15.875	10.16	9.40	7.03	5.13	22.6	23.7	15.09	2.42	20.0/4545	22.60	1.02
60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.90	1.29
60HPF1	19.050	11.91	12.70	8.31	5.01	25.5	26.8	18.00	2.42	28.0/6364	30.90	1.37
80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.00	2.26
80HPF1	25.400	11.70	13.50	7.80	4.00	27.0	28.4	21.50	2.42	27.44/6236	29.30	1.50
80HPF2	25.400	15.88	15.75	11.40	8.40	32.5	33.8	24.00	3.25	45.0/10227	48.00	2.23
80H-HP	25.400	15.88	15.75	11.40	8.05	35.7	37.0	24.00	4.00	50.0/11364	52.00	2.63
80HPF3	25.400	15.88	15.88	11.40	7.96	32.4	33.8	23.24	3.25	50.0/11364	52.00	2.26
80HPF4	25.400	11.70	13.50	7.80	4.10	29.0	30.5	21.50	3.00	40.0/9091	43.20	1.77
80HPF5	25.400	15.88	15.80	11.40	8.05	31.0	32.50	24.00	3.25/2.42	34.0/7647	37.00	2.28
HB38.1F6	38.100	18.00	15.20	14.00	10.20	34.5	36.50	27.00	3.70	45.0/10227	48.00	2.46
HB41.3	41.300	10.16	9.65	7.10	5.40	20.4	-	16.00	2.03	13.0/2924	14.30	0.67
HB41.75F5	41.750	17.11	19.90	14.11	10.30	39.0	40.4	25.26	4.00	49.0/11136	53.90	2.11
A2080HP	50.800	15.88	15.75	11.40	8.05	32.4	33.8	24.00	3.25	42.3/9615	46.10	1.60

空心销轴输送链 Hollow pin conveyor chains

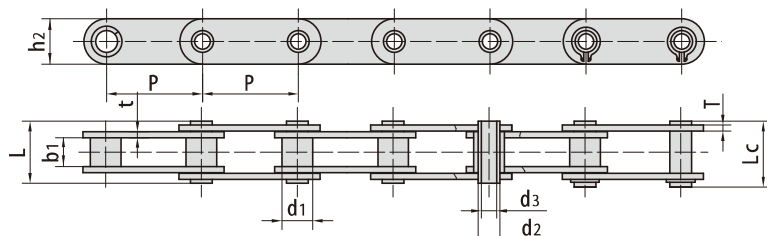


东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between innerplates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
HP12.5	12.500	8.51	8.20	6.65	4.50	16.4	17.6	11.60	1.5/1.3	8.0/1819	8.8	0.61
C08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	11.0/2500	11.5	0.62
C40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.2	0.64
C50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.6	1.05
C60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.9	1.52
C80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	2.63
C2040HP	25.400	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.6	0.46
C2040HPF1	25.400	7.95	7.85	5.63	M4	16.5	17.6	12.00	1.50	9.0/2045	9.9	0.44
C2050HP	31.750	10.16	9.40	7.22	5.12	20.5	21.8	15.00	2.03	20.4/4636	22.8	0.76
C2060HP	38.100	11.91	12.70	8.31	6.00	25.8	26.8	17.00	2.42	24.0/5455	27.1	1.02
C2060H-HP	38.100	11.91	12.70	8.31	6.00	29.2	30.2	17.00	3.25	24.0/5455	27.1	1.29
HB38.1F8	38.100	10.16	9.65	7.10	5.40	20.4	-	16.00	2.03	13.0/2954	14.3	0.67
HB38.1F15	38.100	18.00	21.00	12.00	8.10	47.8	49.0	34.00	5.60	50.0/11364	52.0	5.72
HP40F1	40.000	18.00	22.00	12.00	8.00	47.5	48.2	35.00	5.00	57.0/13049	63.8	5.38
HP40F2	40.000	18.00	22.00	12.00	8.20	47.5	48.2	35.00	5.00	57.0/13049	63.0	5.37
HP50F1	50.000	26.00	14.50	20.00	14.70	35.3	36.2	40.00	3.10	30.0/6818	33.6	3.98
HP50F7	50.000	18.00	15.00	14.00	10.20	36.0	37.5	26.00	4.00	40.0/9091	43.2	2.56
HP50F10	50.000	18.00	22.00	12.10	8.30	39.5	40.6	30.00	3.00	45.0/10227	48.0	2.73
HP50F16	50.000	18.00	17.00	14.50	10.20	39.0	40.0	27.00	4.00	40.0/9091	44.0	2.83
C2080HP	50.800	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	1.81
HB55	55.000	18.00	22.00	14.00	10.00	43.4	44.5	30.00	4.00	50.0/11364	52.0	3.31
HB55F1	55.000	24.00	24.00	17.00	12.00	52.0	53.5	40.00	5.00	90.0/20455	100.0	6.34

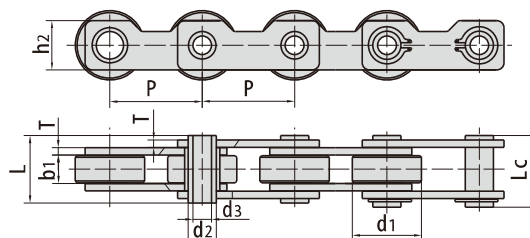


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between innerplates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	T	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
HB50.8F1	50.8	38.1	15.7	15.5	10.3	35.2	36.7	27.2	4.00	55.46/51650	58.8	4.97

空心销轴输送链 Hollow pin conveyor chains

A 型
Type A

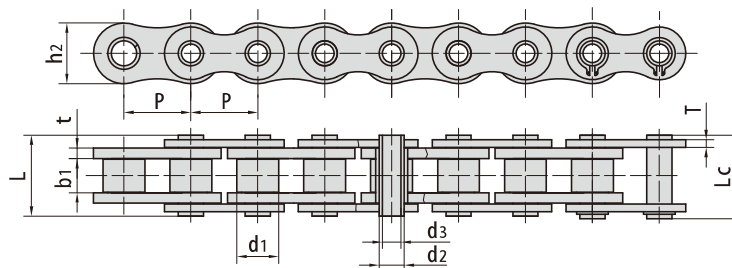

B 型
Type B

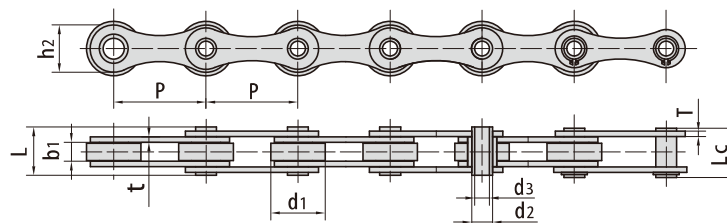


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter	型号 Type
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q _{min}	Q ₀	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m	
10HB	15.875	10.16	9.65	5.94	4.04	19.30	20.60	14.70	1.70	17.00/3864	20.80	0.86	A
12BHP	19.050	12.07	11.68	6.50	4.00	21.60	22.80	15.90	1.85	23.60/5364	25.90	1.09	A
60HB	19.050	11.91	12.70	7.00	5.01	25.50	26.60	18.00	2.42	20.00/4545	22.40	1.35	A
12AHBF2	19.050	11.91	12.70	7.00	5.10	26.50	27.60	18.00	2.42	20.00/4545	22.40	1.39	A
12BHPP6SLR	19.050	12.07	11.68	6.50	4.04	22.30	23.50	15.90	1.85	23.60/5364	25.96	1.12	A
12BHPP10	19.050	12.07	11.68	6.50	4.00	21.60	22.80	15.90	1.85	23.60/5364	25.90	1.08	A
HP20F1	20.000	12.00	22.00	7.00	5.00	35.70	37.70	18.00	2.42	18.00/4180	19.20	1.89	A
16BHB F1	25.400	15.88	12.70	9.53	7.05	30.80	32.20	23.00	4.15/3.10	40.00/9091	45.00	2.28	A
HB25.4	25.400	20.00	8.00	8.00	5.20	19.50	20.50	17.00	2.03	25.00/5620	28.00	1.30	A
16BHB F4	25.400	15.88	17.02	6.05	4.20	28.00	29.00	14.00	2.03	10.00/2248	11.00	1.50	A
HB25.4F7	25.400	20.00	18.00	8.00	3.00	35.00	36.00	18.00	3.00	25.00/5620	28.80	2.83	B
HB25.4F8	25.400	15.88	8.00	7.10	5.10	16.50	17.70	13.50	1.50	9.00/2024	10.00	0.78	B
HB28.58	28.580	15.88	16.20	8.03	5.50	36.30	37.00	24.00	4.00	22.00/4945	24.20	3.00	A
HP35	35.000	20.00	16.00	13.35	10.20	30.40	31.60	26.30	2.50	23.52/5345	26.40	2.02	A
HB35	35.000	20.00	16.00	14.00	10.20	32.00	33.50	38.10	3.00	40.00/9091	45.00	2.39	A
HB38.1	38.100	20.00	8.00	8.00	5.30	19.60	20.70	17.30	2.03	28.00/5682	28.80	0.98	B
HB38.1F1	38.100	20.00	18.00	10.50	5.10	39.00	40.30	22.00	4.00	60.00/13636	64.30	2.59	B
HB38.1F3	38.100	25.40	12.70	12.00	8.30	27.00	28.60	21.00	2.50	25.00/5620	28.80	1.51	B
HB38.1F4	38.100	20.00	12.70	8.00	5.20	26.00	27.20	17.00	2.42	24.00/5455	26.90	1.48	B
HP38.1F9	38.100	22.20	12.70	11.00	8.15	26.50	27.50	18.00	2.50	22.00/5000	24.40	1.46	B
HB38.1F10	38.100	25.40	25.40	14.63	10.50	54.00	54.30	33.20	6.00/4.80	50.00/11240	55.00	6.10	A
HP40F4	40.000	26.00	10.00	11.40	8.20	26.50	28.00	24.00	3.00	50.00/11240	56.70	2.20	B
HB41.4F1	41.400	25.40	15.00	13.80	10.50	35.50	37.00	32.00	4.00	45.00/10116	49.50	3.66	B
HP41.75F1	41.750	17.10	20.20	11.11	8.20	35.70	39.00	21.65	3.10	26.50/6022	29.20	1.60	A
HP41.75F2	41.750	17.10	20.20	11.11	8.20	35.70	41.00	25.26	3.10	49.00/11136	54.80	2.04	A

*外链板为直板形。

*Denotes straight side outer plates.


空心销轴输送链 Hollow pin conveyor chains

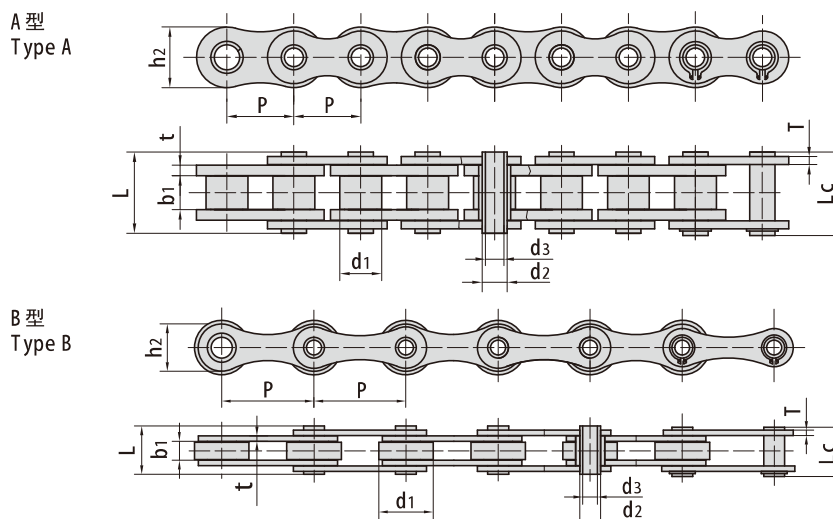

东华链号 Donghua Chain No.	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	抗拉强度	平均抗拉强度	每米长重	型号
	Pitch	Roller diameter	Width between inner plates	Pin diameter		Pin length		Inner plate depth	Plate thickness	Tensile strength	Average tensile strength	Weight per meter	Type
	P	d _{1 max}	b _{1 min}	d _{2 max}	d _{3 min}	L _{max}	L _{c max}	h _{2 max}	t/T _{max}	Q _{min}	Q ₀	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m	
HP41.75F3	41.750	17.00	20.50	11.00	8.30	36.00	39.50	21.40	3.00	27.00/6136	28.00	1.62	A
HP41.75F6	41.750	17.10	20.20	11.11	8.20	36.70	37.50	25.26	3.10	49.00/11015	53.90	2.04	A
HP50F2	50.000	31.00	15.00	13.20	10.20	36.50	38.00	25.00	4.00	40.00/9091	43.20	3.40	B
DH16500HP	50.000	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11240	53.60	2.23	B
HB50F4	50.000	30.00	10.00	11.60	8.00	26.60	30.00	25.40	3.00	60.00/13635	67.20	2.03	B
HB50F1-C30	50.000	30.00	10.00	12.00	8.20	26.50	28.10	26.00	3.00	45.00/11016	49.50	2.36	B
HB50.8	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11240	53.60	2.56	B
HB50.8F4	50.800	30.00	10.50	13.60	8.20	27.40	28.90	26.00	3.10	42.00/9545	48.20	2.28	B
HB50.8F14	50.800	30.00	10.00	11.60	8.00	26.60	30.00	25.40	3.00	60.00/13635	67.20	2.01	B
HB60F6	60.000	30.00	10.00	11.60	8.00	26.60	30.00	26.00	3.00	46.00/10341	50.60	2.06	B
HB60F7	60.000	30.00	10.00	11.60	8.00	26.60	30.00	25.40	3.00	60.00/13635	66.00	1.82	B
HB63	63.000	30.00	10.00	11.40	8.10	26.70	28.10	26.50	3.10	50.00/11240	53.60	2.07	B
HB63F1	63.000	40.00	10.00	11.40	8.10	26.70	28.10	26.50	3.10	50.00/11240	53.60	2.27	B
HB63F2	63.000	40.00	20.00	11.40	8.10	36.70	38.10	26.50	3.10	50.00/11240	53.60	3.20	B
HB63F3	63.000	40.00	15.00	11.40	8.20	35.60	37.00	26.50	4.00	35.00/7955	38.50	3.90	B
HB63F4	63.000	30.00	20.00	11.40	8.10	36.70	38.10	26.50	3.10	50.00/11240	53.60	2.97	B
HB63F6	63.000	30.00	10.00	11.70	8.20	26.70	28.10	26.50	3.10	50.00/11240	56.70	2.08	B
HB63F7	63.000	40.00	18.00	14.00	10.20	38.00	39.50	28.00	4.00	50.00/11240	56.70	4.26	B
HB63F8	63.000	30.00	20.00	11.70	8.10	36.50	38.00	26.50	3.10	50.00/11240	56.70	2.91	B
HB63F14	63.000	30.00	10.00	11.40	8.10	30.20	31.60	26.50	4.00	50.00/11240	55.00	2.45	B
HB63.5F3	63.500	31.00	15.00	14.00	8.20	31.00	33.00	28.00	3.00	34.00/7647	38.00	2.75	B
HB80F3	80.000	45.00	20.00	24.00	18.00	39.00	40.60	40.00	3.50	75.00/16858	82.50	4.60	B
HB100	100.000	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11240	53.60	1.56	B
HB100F8	100.000	30.00	10.00	11.60	8.00	26.60	30.00	25.40	3.00	60.00/13635	67.20	1.37	B
HB100F16	100.000	35.00	16.00	13.00	8.20	38.60	40.00	30.00	4.00	86.24/19337	95.00	3.26	B

空心销轴输送链


Hollow pin conveyor chains

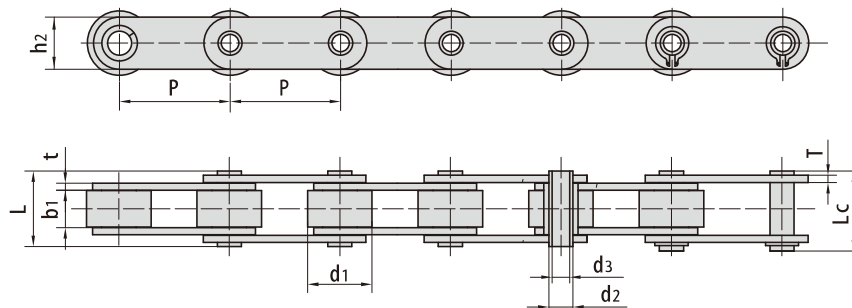

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	t/T max	Q _m in	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
C 12A HB	19.05	11.91	12.70	7.00	5.01	25.50	26.6	18.0	2.42	20.0/4545	22.40	1.58
C 12B HP	19.05	12.07	11.68	6.50	4.00	21.60	22.8	15.9	1.85	20.0/4545	22.40	1.22
C 2042HP	25.40	15.88	7.85	5.63	4.00	16.50	17.6	12.0	1.50	11.0/2500	12.60	0.78
C 2042H-HP	25.40	15.88	7.85	5.63	4.00	18.80	19.9	12.0	2.03	11.0/2500	13.20	0.95
C 2052HP	31.75	19.05	9.53	7.22	5.12	20.50	21.8	15.0	2.03	20.4/4636	22.80	1.25
C 2052HPF1	31.75	19.05	9.40	7.03	5.12	20.00	21.5	15.3	1.85	15.0/3409	17.30	1.21
C 2052HPF3	31.75	19.05	9.53	7.02	5.13	20.10	21.6	15.09	2.03	19.6/4455	21.60	1.20
C 2052H-HP	31.75	19.05	9.53	7.22	5.12	22.10	23.4	15.0	2.42	20.4/4545	23.50	1.44
C 2062HP	38.10	22.23	12.70	8.31	6.00	25.80	26.8	17.0	2.42	24.0/5455	27.10	1.72
C 2062H-HP	38.10	22.23	12.70	8.31	6.00	29.20	30.2	17.0	3.25	24.0/5455	27.60	1.99
C 2062H-HPF3	38.10	22.23	12.70	8.31	6.00	25.80	26.8	17.0	2.42	24.0/5455	27.10	1.72
C 2082HP	50.80	28.58	15.75	11.40	8.05	32.40	33.8	24.0	3.25	50.0/11364	52.00	2.82
C 2082H-HP	50.80	28.58	15.75	11.40	8.05	35.70	37.0	24.0	4.00	50.0/11364	56.50	3.34
C 1655HP	50.80	30.00	10.50	13.00	8.20	27.40	28.9	26.0	3.10	42.0/9545	48.20	2.72
63HPF1	63.00	40.00	15.00	16.00	12.10	35.00	36.2	28.5	4.00	50.0/11364	56.70	4.20
C 2102HP	63.50	39.67	18.90	13.60	9.50	40.30	42.0	30.0	4.00	60.0/13636	72.00	5.13
DH 4202HP	50.80	31.80	15.00	14.00	10.10	36.30	39.0	26.0	3.80	42.0/9545	51.60	3.75
DH 4203HP	76.20	31.80	15.00	14.00	10.10	36.30	39.0	26.0	3.80	42.0/9545	47.10	3.01
DH 8403HP	76.20	47.60	19.00	19.05	13.60	43.80	46.3	39.0	5.1/3.8	84.3/19159	130.30	6.81
DH 42035HP	88.90	31.80	15.00	14.00	10.10	36.30	39.0	26.0	3.80	42.0/9545	51.10	2.79
DH 4204HP	101.60	31.80	15.00	14.00	10.10	36.30	39.0	26.0	3.80	42.0/9545	51.60	2.63
DH 8404HP	101.60	47.60	19.00	19.05	13.60	43.80	46.3	39.0	5.1/3.8	84.3/19159	130.30	5.78
DH 8406HP	152.40	47.60	19.00	19.05	13.60	43.80	46.3	39.0	5.1/3.8	84.0/19091	130.30	5.18
HB 25.4F2	25.40	15.89	17.26	9.00	6.35	31.30	32.5	20.0	2.50	20.0/4545	22.40	1.97
HB 25.4F4	25.40	20.00	11.00	12.00	8.35	27.00	28.4	24.0	3.00	32.0/7273	35.80	2.48
HB 38.1F2	38.10	25.40	12.70	9.50	6.60	26.60	28.0	19.1	2.30	20.0/4545	22.40	2.07
HB 38.1F6-R	38.10	25.40	15.20	14.00	10.20	34.50	36.5	27.0	3.70	45.0/10228	49.50	3.20
HB 40F1	40.00	22.00	9.00	9.00	6.00	23.00	24.5	18.0	2.50	20.0/4546	22.00	1.58
HB 41.4	41.40	25.40	15.00	13.80	10.50	35.50	37.0	32.0	4.00	45.0/10227	48.00	4.20

空心销轴输送链


Hollow pin conveyor chains

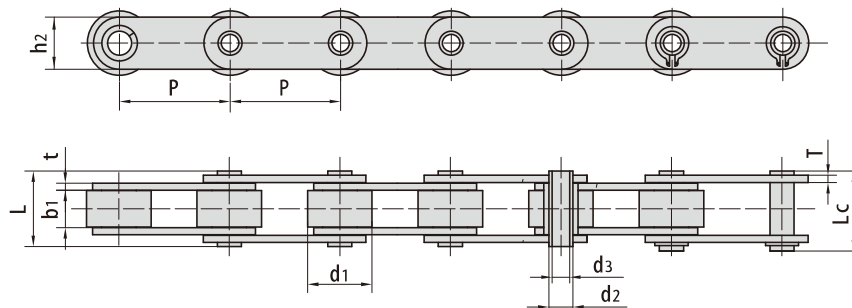

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	t/T max	Q _m in	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
HB 50	50.00	31.00	15.00	14.00	10.20	36.00	37.5	25.0	4.00	40.0/9091	43.20	3.98
HB 50F9	50.00	18.00	11.50	8.20	6.00	27.40	28.4	25.0	3.00	15.0/3409	17.30	2.00
HB 50F12	50.00	25.00	11.60	9.00	6.20	26.00	27.4	20.0	2.50	20.0/4545	22.40	1.77
HB 50.42	50.42	37.30	15.00	14.00	10.20	36.00	37.5	26.2	4.00	40.0/9090	44.80	4.46
HB 50.8F3	50.80	30.00	16.00	14.00	9.00	36.40	37.5	25.5	3.1	42.0/9545	47.00	3.20
HB 50.8F8	50.80	32.00	20.00	19.10	12.40	44.60	46.4	40.0	5.00/4.00	100.0/22727	108.00	6.75
HB 50.8F9	50.80	35.00	12.00	15.50	10.20	36.00	37.3	30.0	5.00	70.0/15909	77.00	4.92
HB 50.8F11	50.80	38.10	16.00	13.80	9.70	37.20	39.5	25.4	3.90	57.0/12814	62.70	5.01
HB 50.8F12	50.80	28.58	16.00	14.00	9.00	36.40	37.5	25.5	3.50	42.0/9545	47.00	3.26
HB 50.8F18	50.80	38.10	16.00	13.80	9.70	37.20	39.5	25.4	4.80/3.90	57.0/12814	62.70	4.85
HB 50.8F20	50.80	38.10	15.20	14.28	9.50	36.60	37.2	26.4	4.00	40.0/8992	44.00	4.88
HB 50.8F26	50.80	30.00	16.00	14.00	9.00	38.40	39.5	27.0	4.00	60.0/13635	67.20	3.98
HB 55F2	55.00	20.00	14.00	9.00	6.00	29.00	31.0	20.0	2.50	18.0/4180	19.20	1.54
HB 57	57.00	30.00	10.00	13.00	10.20	26.40	27.5	26.0	3.00	28.0/6298	30.00	1.84
HB 63F11	63.00	40.00	20.00	20.00	18.00	42.50	43.5	42.0	4.00	46.0/10454	50.60	5.83
HB 63F12	63.00	30.00	10.00	11.40	8.10	26.70	28.1	26.5	3.10	50.0/11364	56.50	2.39
HB 63.5F1	63.50	32.00	15.00	16.00	12.20	32.00	33.0	25.0	3.00	20.4/4636	22.80	2.69
HB 65	65.00	45.00	20.00	25.00	18.00	38.00	40.0	40.0	3.00	46.0/10454	50.60	4.49
HB 65F1	65.00	40.00	20.00	14.00	10.05	40.40	42.0	35.0	4.00	50.0/11364	55.00	5.93
HB 75	75.00	40.00	22.00	18.00	12.20	42.00	44.0	35.0	4.00	60.0/13636	72.00	5.57
HB 76.2	76.20	31.75	15.50	12.70	9.50	35.50	37.0	26.0	4.00	42.0/9545	49.20	3.25
HB 76.2F2	76.20	47.60	20.00	24.00	18.50	44.50	46.1	40.0	5.0/4.0	79.0/17935	92.50	6.77
HB 76.2F6	76.20	44.45	23.00	17.48	13.49	44.20	46.5	35.0	4.00	75.0/17044	82.50	6.27
HB 76.2F9	76.20	47.60	17.50	22.00	16.60	46.00	47.6	38.0	6.00	56.0/12596	61.50	7.52
HB 80	80.00	50.00	20.00	24.00	18.50	44.50	46.1	40.0	5.0/4.0	79.0/17953	92.50	6.81
HB 80F4	80.00	50.00	20.00	24.00	18.50	50.50	51.8	40.0	6.00	120.0/26977	132.00	8.10
HB 86	86.00	45.00	15.00	19.00	14.50	40.00	41.5	35.0	5.00/4.00	85.0/19119	95.00	5.14
HB 100F3	100.00	30.00	24.00	15.95	10.30	46.00	47.3	35.0	4.00	75.0/17046	84.70	4.04
HB 100F6	100.00	60.00	31.00	27.00	19.00	59.00	60.8	50.0	6.00/5.00	150.0/34088	160.00	11.50

空心销轴输送链


Hollow pin conveyor chains

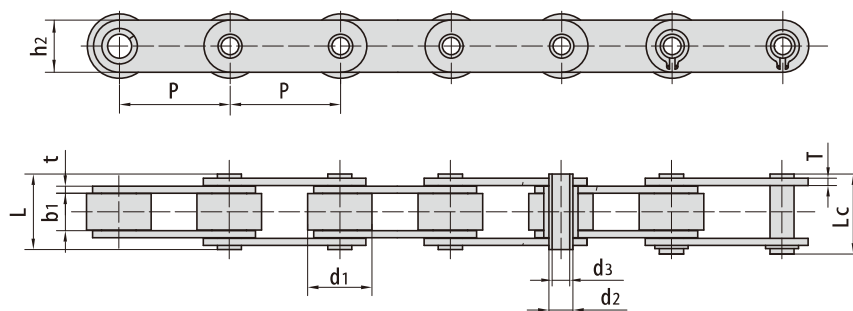


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	t/T max	Q _m in	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
HB100F7	100.00	30.00	15.00	16.00	12.30	36.50	37.8	35.0	4.00	75.0/17046	84.70	3.49
HB100F9	100.00	45.00	32.80	18.00	12.40	49.00	49.0	35.0	5.00	75.0/17046	84.70	6.14
HB100F10	100.00	45.00	22.00	18.00	12.10	48.50	49.7	35.0	5.00	75.0/17046	84.70	6.05
HB100F11	100.00	40.00	20.60	16.00	12.50	42.10	43.4	35.0	4.00	75.0/17046	84.70	4.58
HB100F13	100.00	48.00	25.00	16.00	11.30	51.00	52.8	35.0	5.00	95.0/21356	104.50	7.03
HB100F14	100.00	37.70	22.20	18.00	12.40	45.30	46.3	35.0	4.15	64.0/14395	70.00	4.79
HB100F18	100.00	31.80	17.00	14.00	10.40	39.50	41.0	26.0	3.80	42.0/9545	47.00	2.82
HB100F19	100.00	40.00	22.00	18.00	12.20	44.70	45.9	35.0	4.00	75.0/16869	82.50	5.18
HB100F20	100.00	38.00	19.00	21.00	13.00	48.00	48.0	50.0	4.80	112.0/25192	123.20	6.60
HB125	125.00	70.00	37.00	26.00	16.20	73.50	75.0	60.0	7.00	250.0/56202	275.00	17.56
HB127F1	127.00	66.70	25.40	26.90	20.10	62.00	64.0	50.0	6.30	107.0/24067	118.00	11.30
HB150F1	150.00	60.00	22.00	24.00	18.00	49.50	51.5	45.0	5.00	100.0/22727	110.00	7.55
HB152F3	152.00	70.00	24.50	26.00	20.00	55.00	57.0	51.0	6.00	150.0/33721	165.00	11.60
HP40	40.00	22.00	8.75	9.00	6.00	23.00	24.2	18.0	2.50	27.0/4545	28.00	1.49
HP50	50.00	31.00	14.50	13.20	10.40	31.10	32.5	25.0	3.10	30.0/6818	34.20	3.29
HP50F4	50.00	31.00	15.00	13.20	10.20	36.50	38.0	25.0	4.00	40.0/9091	44.80	3.73
HP50.8	50.80	26.00	15.88	20.00	14.30	41.00	42.2	38.1	4.80	100.0/22727	108.00	5.32
HP76.2F7	76.20	38.00	17.00	15.00	9.53	43.50	44.6	30.0	5.00	90.0/20243	99.00	4.85
HP76.2F9	76.20	44.45	26.00	17.80	12.50	51.70	52.4	39.0	5.10/4.00	84.3/18961	92.50	7.64
HP100	100.00	45.00	22.00	16.00	12.00	46.00	47.5	35.0	5.00	75.0/17044	90.00	6.20
HP100F1	100.00	45.00	22.00	18.00	12.00	47.20	48.5	35.0	5.00	75.0/17044	90.00	6.15
HP101.6F1	101.60	47.60	19.00	19.00	13.20	46.20	48.0	40.0	5.00/4.00	53.0/12045	58.20	6.09
HP101.6F2	101.60	66.70	25.40	26.90	20.10	59.20	60.7	51.0	7.10/5.10	150.0/34088	160.00	14.23
HP101.6F6	101.60	47.60	20.50	21.00	16.11	45.00	46.5	40.0	5.00/4.00	60.0/13488	66.00	6.20
HP101.6F8	101.60	63.50	27.50	19.05	13.10	60.70	65.5	50.8	6.40	120.0/26977	132.00	13.12
HP130	130.00	40.00	21.00	18.10	12.10	41.30	42.5	35.0	3.80	80.0/18183	89.60	4.21
HP152	152.40	66.70	25.40	26.90	19.56	57.20	59.5	50.8	7.10/5.10	94.0/21362	107.80	9.90
HP152.4F1	152.40	47.60	19.00	19.00	13.20	46.20	48.0	40.0	5.00/4.00	54.0/12270	59.50	5.00
HP152.4F4	152.40	64.00	25.40	29.00	21.00	59.50	60.1	50.0	8.00/5.00	71.3/16028	78.43	9.82

空心销轴输送链 Hollow pin conveyor chains

A 型
Type A

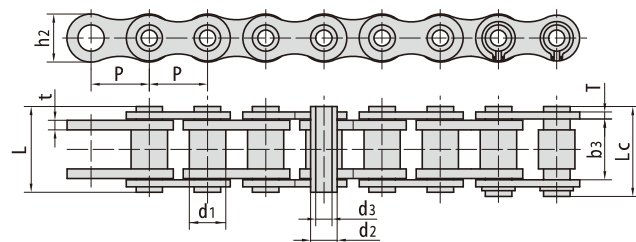

B 型
Type B

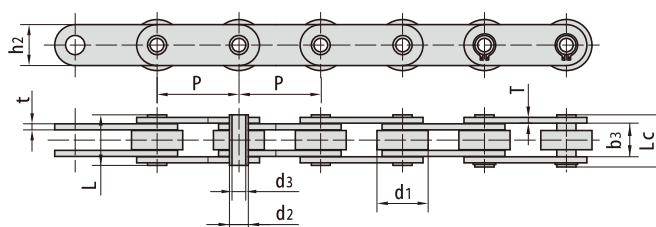

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	外节内宽 Width between outer plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter	型号 Type
	P	d_1 max	b_3 min	d_2 max	d_3 min	L max	Lc max	h_2 max	t/T max	Q_m min	Q_0	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m	
08BHPF2	12.700	8.51	13.20	6.65	5.20	18.00	19.2	11.8	1.6/1.3	10.0/2273	11.4	0.50	A
08BHPF3	12.700	8.51	13.40	6.65	4.00	19.00	20.2	11.8	1.70	14.0/3182	16.8	0.69	A
HB 12.7	12.700	8.51	13.40	6.65	4.10	19.00	20.2	11.8	1.70	14.0/3182	16.8	0.69	A
08BHPF8	12.700	8.51	11.30	6.30	4.50	16.70	18.5	11.8	1.60	11.0/2500	12.1	0.80	A
40HPF1-D3	12.700	8.51	11.60	6.35	4.36	20.60	20.6	12.0	1.50	11.0/2500	12.1	0.77	A
41HP	12.700	7.77	9.20	5.63	4.19	13.75	16.0	9.91	1.30	4.0/899	4.4	0.35	A
10BHPF1	15.875	10.16	13.41	7.03	5.00	19.20	20.2	14.0	1.85	17.0/3864	20.6	0.83	A
10BHPF2	15.875	10.16	10.40	7.03	5.00	17.00	18.0	14.0	1.85	15.0/3409	17.3	0.74	A
50HPF1	15.875	10.16	13.60	7.03	5.13	20.70	21.9	14.4	2.03	18.0/4091	21.6	0.92	A
12BHPF1	19.050	12.07	16.00	8.03	5.40	22.70	23.9	15.8	1.85	25.0/5682	28.8	1.09	A
60HPF2	19.050	11.91	11.23	5.63	4.05	16.50	17.6	10.4	1.50	10.0/2273	10.8	0.62	A
C 12BHPF9	19.050	12.07	15.80	8.03	5.00	22.40	23.9	16.1	1.85	25.0/5682	28.8	1.26	B
12BHPF9	19.050	12.07	15.80	8.03	5.00	22.40	23.9	16.1	1.85	25.0/5682	28.8	1.18	A
60HPF3	19.050	11.91	17.20	8.40	6.10	24.70	26.0	18.0	2.03	20.0/4546	24.0	1.54	A
16BHPF1	25.400	15.88	25.58	11.50	8.10	36.50	37.6	21.0	4.15/3.10	45.0/10227	52.2	2.21	A
HB 38.1F7	38.100	22.20	17.50	11.00	8.30	25.00	26.6	18.0	2.50	20.0/4545	22.4	1.46	A
HB 38.1F9	38.100	18.00	22.60	14.00	10.00	32.50	34.5	26.5	3.00	40.0/9090	44.0	2.40	B
HP 38.1F10	38.100	17.95	23.50	13.60	10.44	36.00	37.3	28.4	3.70	70.0/15736	77.0	2.66	A
32BHP	50.800	29.21	45.70	24.10	18.25	66.00	68.0	42.0	7.00/6.00	155.0/34864	170.0	7.40	A
63HP	63.000	40.00	23.50	16.00	12.00	35.30	38.3	28.6	4.00	65.0/14773	71.5	4.14	B
63HPF2	63.000	40.00	25.80	14.00	8.08	39.10	41.1	20.0	5.00	50.0/11364	65.7	4.17	B
63HPF4	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.6	4.00	44.0/10000	57.2	4.13	B
63HPF6	63.000	40.00	28.94	16.00	10.30	41.80	43.4	28.6	4.00	44.0/10000	57.2	5.18	B
63HPF11	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.6	4.00	65.0/147333	71.5	4.25	B
63HPF12	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.0	4.00	44.0/10000	57.2	4.02	B
HB 63F17	63.000	40.00	23.40	18.00	12.20	37.00	38.0	25.0	4.00	40.0/9090	44.0	4.13	B
C 2122HPF1	76.200	47.60	29.00	17.81	12.70	43.30	44.7	38.1	4.80	53.3/12123	59.2	7.05	B
HP 101.6F6	101.600	47.60	30.50	21.00	16.11	45.00	46.5	40.0	5.00/4.00	60.0/13636	72.0	6.20	B
HP 130	130.000	40.00	29.20	18.10	12.10	41.30	42.5	35.0	3.80	80.0/17994	88.0	3.90	B
HP 150F1	150.000	60.00	43.50	24.00	18.20	59.00	61.0	45.0	5.00	140.0/31490	154.0	8.52	B

自动扶梯梯级链 Escalator step chains

商用型
Commercial type for commercial use



节距 Pitch	梯级距 Step distance	抗拉强度 Tensile strength
133.33	400.0	75 kN ~ 260 kN
135.46	406.4	70 kN ~ 155 kN
68.40	410.4	98 kN ~ 161.4 kN
135.00	405.0	130 kN ~ 205 kN
136.00	410.4	80 kN ~ 160 kN

自动扶梯梯级链 Escalator step chains

免润滑型
Free of lubrication type



节距 Pitch	梯级距 Step distance	抗拉强度 Tensile strength
133.33	400.0	88 kN ~ 380 kN
135.46	406.4	123 kN ~ 160 kN
101.15	404.6	150 kN ~ 300 kN
100.00	400.0	240 kN ~ 320 kN

自动扶梯梯级链 Escalator step chains

公共交通型
Public transport type for public transport



节距 Pitch	梯级距 Step distance	抗拉强度 Tensile strength
133.33	400.0	130 kN ~ 520 kN
135.46	406.4	150 kN ~ 400 kN
101.15	404.6	120 kN ~ 450 kN
102.60	410.4	170 kN ~ 360 kN

自动人行道踏板链


Moving walk pallet chains



节距 Pitch	梯级距 Step distance	抗拉强度 Tensile strength
133.33	400.0	90 kN ~ 180 kN
135.46	406.4	127 kN ~ 150 kN
120.00	360.0	105 kN ~ 120 kN


人造板设备用链条

Conveyor chains for fibreboard equipment

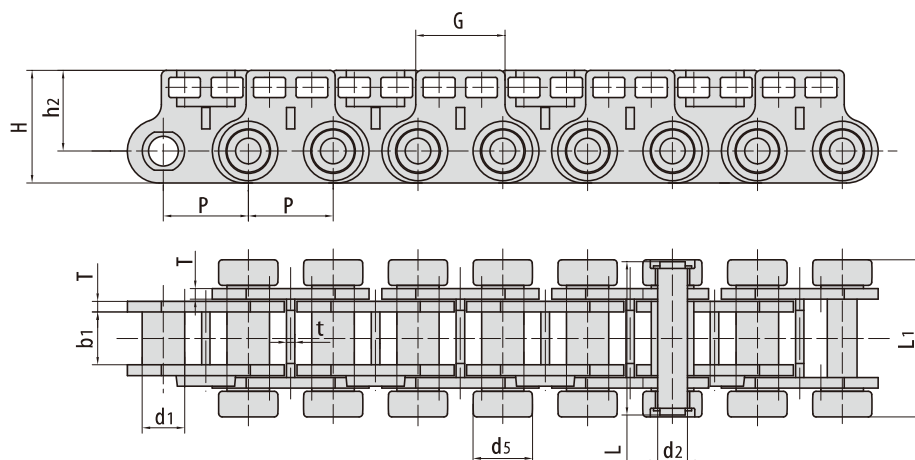

东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	H max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 40	40.0	20.0	25.0	14.0	73.0	53.0	5.0	90.0/20250	10.67


东华链号 Donghua Chain No.	P	G	L1	h2	d5	t
	mm	mm	mm	mm	mm	mm
P 40	40.0	42.0	75.0	38.0	28.0	4.0

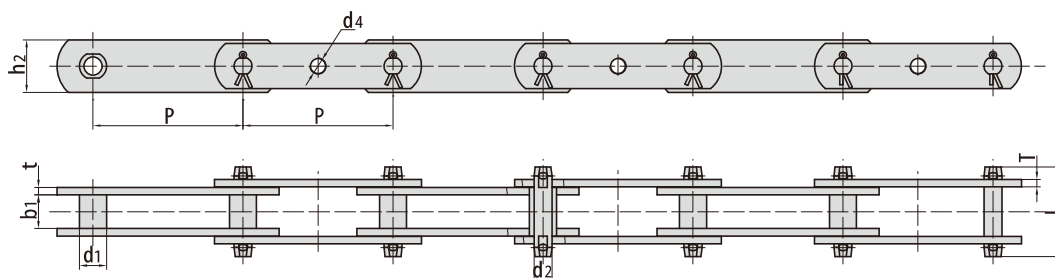

东华链号 Donghua Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate size			抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	d4	t/T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 100F270G K	100.0	18.0	22.0	12.0	60.0	35.0	M 10	5.0	98.0/22030	4.60
P 100F178	100.0	18.0	22.0	12.0	54.0	30.0	M 10	5.0	98.0/22030	4.00


喷涂设备输送链

Conveyor chains for spraying equipment

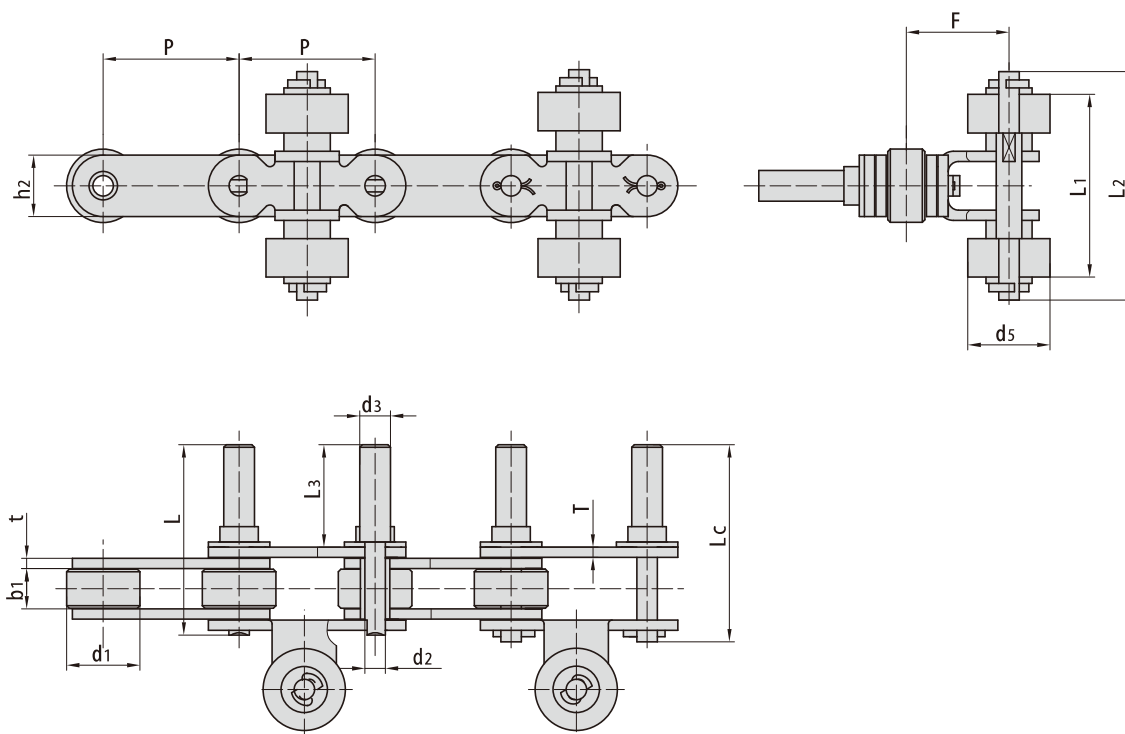

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length			链板尺寸 Plate dimension		附件尺寸 Attachment dimension				抗拉强度 Tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	d _{3 max}	L ₃	L _{max}	L _{c max}	h _{2 max}	t/T _{max}	F	d ₅	L ₁	L ₂	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kg/m
P 38.1F28	38.10	22.23	12.70	7.92	10.0	64.5	101.0	-	20.0	4.0	30.7	30.0	76.5	87.2	50.00/11240	4.06
P 42.5F2	42.50	25.40	25.22	12.70	12.0	69.0	121.4	126.0	41.0	5.6	45.2	32.0	93.0	109.0	169.00/37991	14.25
P 53F2	53.00	28.58	15.75	7.92	12.0	60.0	94.5	98.0	24.0	4.0	40.0	32.0	74.0	89.0	62.36/14018	7.60


烟草机械输送链 Tobacco conveyor chains

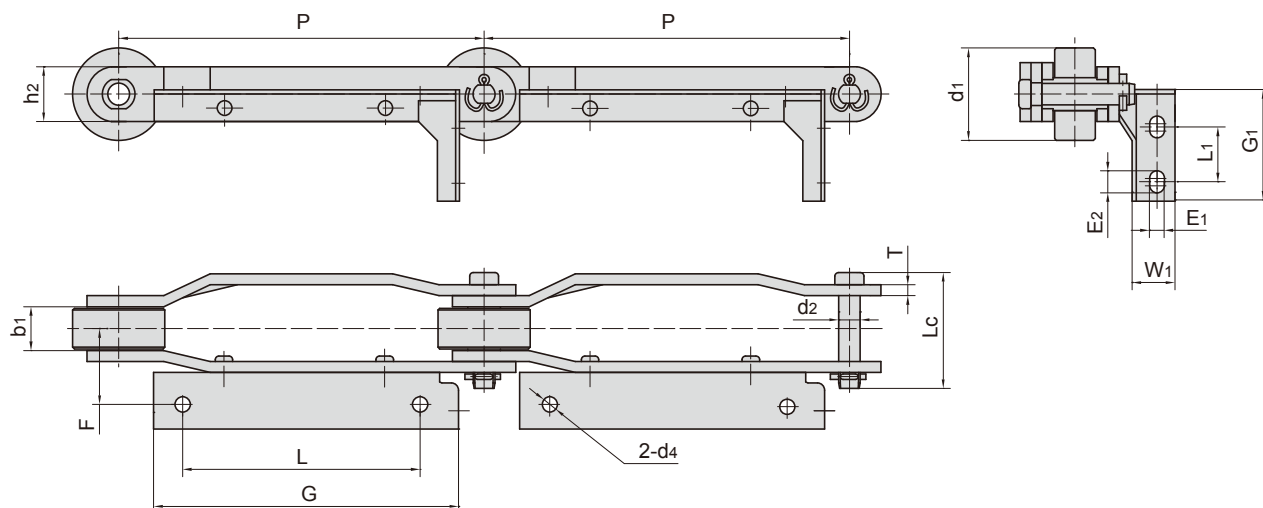

东华链号 Donghua Chain No.	G	L	F	G ₁	L ₁	W ₁	E ₁	E ₂	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm	mm
P200F74	167.0	130.0	41.5	60.0	30.0	23.0	8.0	12.0	8.0
P200F132	168.0	127.0	44.3	63.0	27.0	26.0	7.0	7.0	8.0
P200F156	167.0	130.0	41.2	60.0	30.0	23.0	8.0	12.0	8.0
P200F177	170.0	127.0	48.0	62.0	27.0	26.0	7.0	7.0	7.0
P203.2F2	170.0	127.0	39.0	62.0	27.0	24.0	6.8	10.8	6.5

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P200F74	200.0	50.0	24.0	11.9	62.0	30.0	6.0	100/22480	110.0	6.1
P200F132	200.0	50.0	25.5	14.0	63.0	35.0	6.0	130/29225	143.0	7.1
P200F156	200.0	50.0	23.0	11.9	62.0	32.0	6.3	100/22480	110.0	6.4
P200F177	200.0	60.0	26.0	18.0	75.0	45.0	8.0	230/51704	241.5	11.8
P203.2F2	203.2	50.5	24.0	11.0	64.6	32.0	6.0	120/26977	130.0	6.2


烟草机械输送链 Tobacco conveyor chains

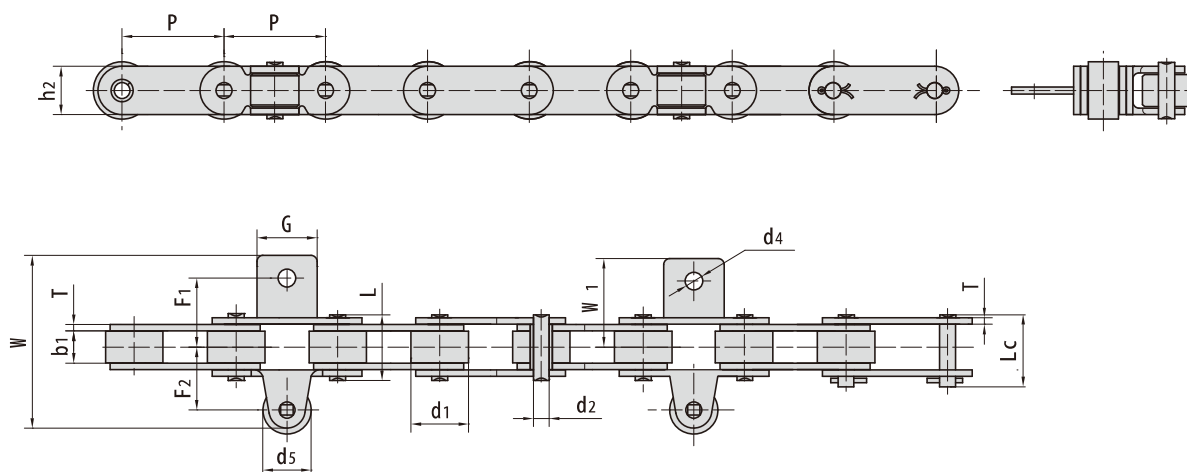

东华链号 Donghua Chain No.	G	F ₁	F ₂	W ₁	W	d ₄	d ₅
	mm	mm	mm	mm	mm	mm	mm
C 2082F35	30.0	33.0	32.0	45.7	86.7	8.8	24.0
C 2082HF70	30.0	34.0	32.0	44.0	85.0	8.6	24.0
C 2082F78	30.0	28.5	32.0	45.7	86.7	8.8	24.0


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
C 2082F35	50.8	28.58	15.75	7.92	32.7	36.5	24.0	3.25	55.6/12500	60.0	3.37
C 2082HF70	50.8	28.58	15.75	7.92	36.2	38.9	24.0	4.00	55.6/12500	60.0	3.31
C 2082F78	50.8	28.58	15.75	7.92	32.7	36.5	24.0	3.25	55.6/12500	60.0	3.37

烟草机械输送链 Tobacco conveyor chains

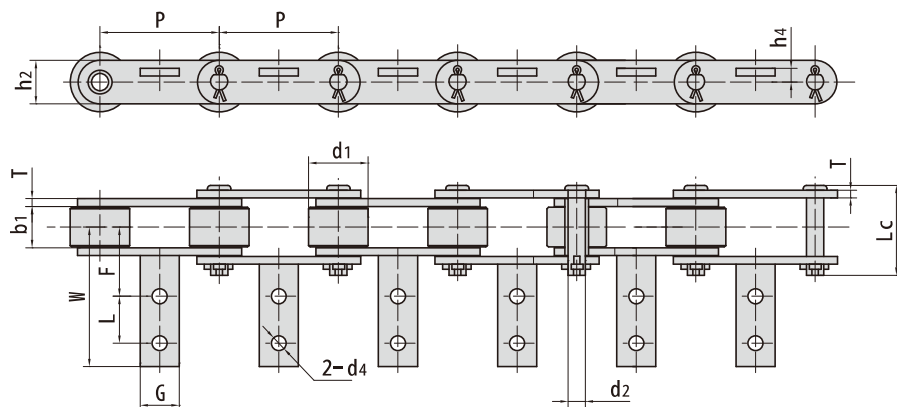

东华链号 Donghua Chain No.	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm
P76.2F30	25.0	31.8	44.5	89.8	9.0	9.7

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P76.2F30	76.2	38.0	24.0	11.0	55.0	28.7	5.0	75/16860	80.0	5.67

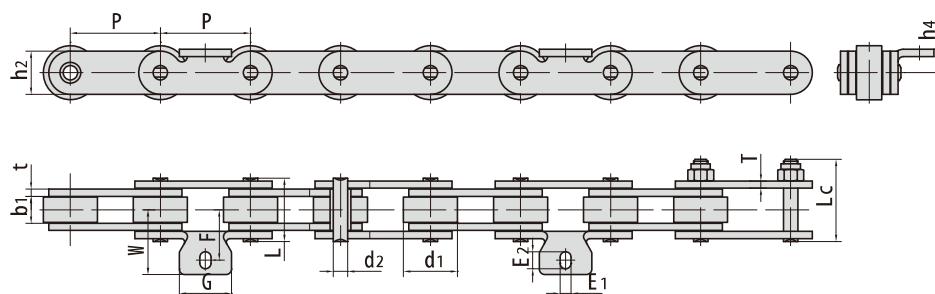

东华链号 Donghua Chain No.	G	F	W	h4	E1	E2
	mm	mm	mm	mm	mm	mm
P50F46	29.0	27.5	36.5	13.0	6.2	9.5

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴尺寸 Pin dimension			链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P50F46	50.0	30.0	14.5	8.0	35.5	45.6	24.0	4.0	50/11240	55.0	3.73

Technical drawing of a cable car system, showing a side view and a top view.

Side View (Top):

- Shows a cable with pulleys and a car.
- Dimensions: P (pitch), h_2 (height), h_4 (height).


Top View (Bottom):

- Shows the cable's cross-section and the car's components.
- Dimensions: t (thickness), L (length), d_5 , d_2 , d_1 (diameters), T (thickness), b_1 (width), W (width), F (force), G (width), d_4 (diameter), L_c (length).

东 华 链 号 Donghua Chain No.	节 距	滚 子 直 径		内 节 内 宽	销 轴 直 径	销 轴 长 度		链 板 高 度	链 板 厚 度	抗 拉 强 度	平 均 抗 拉 强 度	每 米 长 重
	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length		Plate depth	Plate thickness	Tensile strength	Average tensile strength	Weight per meter
	P	d _{1max}	d _{5max}	b _{1min}	d _{2max}	L _{max}	L _{cmax}	h _{2max}	t/T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 100F74	100.0	60.0	—	34.0	18.0	—	69.0	45.0	6.0/5.0	140/31470	150.0	13.80
P 100F171	100.0	60.0	—	35.0	18.0	65.0	69.5	41.0	6.0/5.0	140/31470	150.0	13.17
P 100F173A1	100.0	60.0	75.0	36.0	18.0	65.0	70.5	45.0	6.0/5.0	140/31470	150.0	16.10
P 100F260A1	100.0	60.0	—	34.0	18.0	—	63.0	45.0	4.0	120/26977	130.0	11.20
P 160F104A1	160.0	80.0	96.0	48.0	25.0	95.5	102.0	65.0	10.0/8.0	315/70812	330.7	28.30


烟草机械输送链

Tobacco conveyor chains

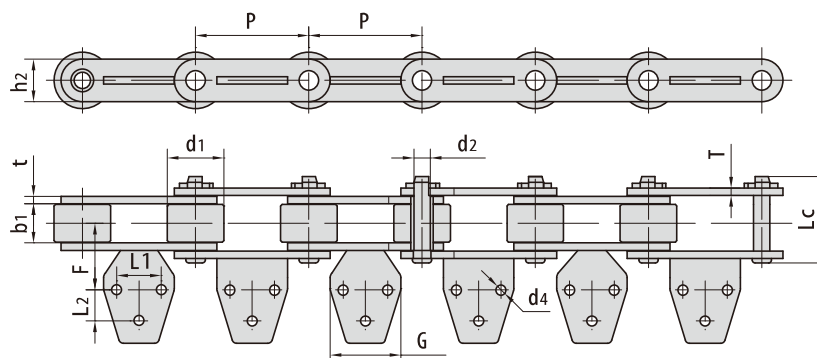

东华链号 Donghua Chain No.	G	F	L1	L2	d4
	mm	mm	mm	mm	mm
P76.2F63A3	47.5	44.7	30.0	21.0	6.7


东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴尺寸 Pin dimension		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P76.2F63A3	76.2	38.1	25.2	11.0	57.0	28.7	5.0	80/17984	88.0	7.10

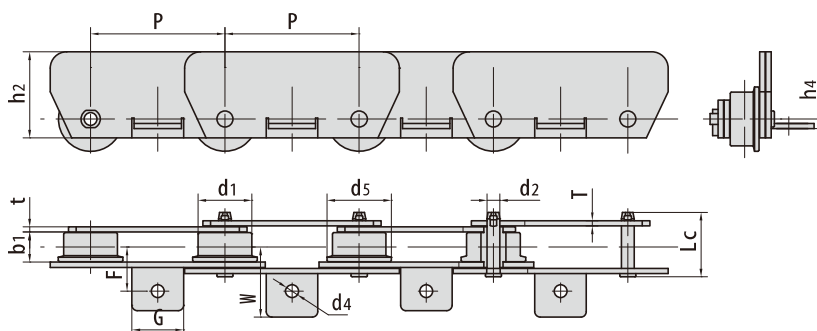

东华链号 Donghua Chain No.	G	F	W	h4	d4
	mm	mm	mm	mm	mm
M 80F36A1-F-125	48.0	41.0	65.0	9.0	12.0


东华链号 Donghua Chain No.	节距	滚子直径		内节内宽	销轴直径		链板高度	链板厚度	抗拉强度	平均抗拉强度	每米长重
	Pitch	Roller diameter		Width between inner plates	Pin diameter		Plate depth	Plate thickness	Tensile strength	Average tensile strength	Weight per meter
	P	d _{max} 1	d _{max} 5	b _{min} 1	d _{max} 2	L _{max} c	h _{max} 2	t/T _{max}	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 80F36A1-F-125	125.0	50.0	60.0	28.0	12.0	60.0	80.0	5.0	80/17984	88.0	12.50

烟草机械输送链 Tobacco conveyor chains

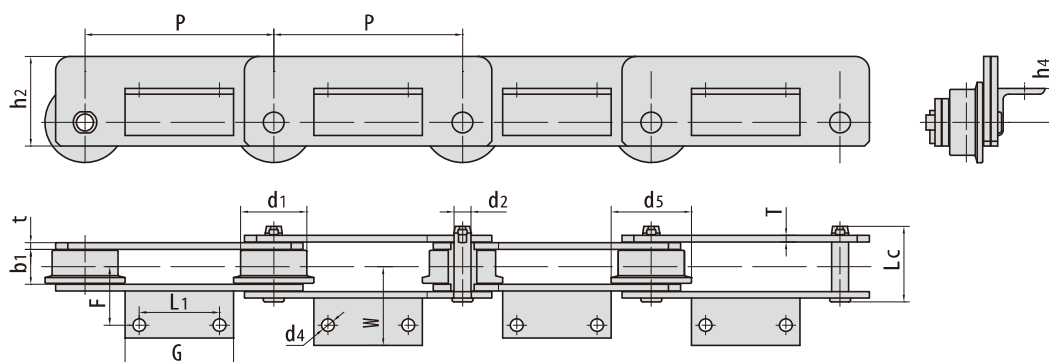

东华链号 Donghua Chain No.	G	L ₁	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm
M 160F57A2-F-200	115.0	85.0	62.0	83.3	36.0	13.5

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴尺寸 Pin dimension		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	d _{5 max}	b _{1 min}	d _{2 max}	L _{c max}	h _{2 max}	t/T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
M 160F57A2-F-200	200.0	70.0	90.0	37.0	18.0	80.0	95.0	7.0	160/15968	172.8	18.80

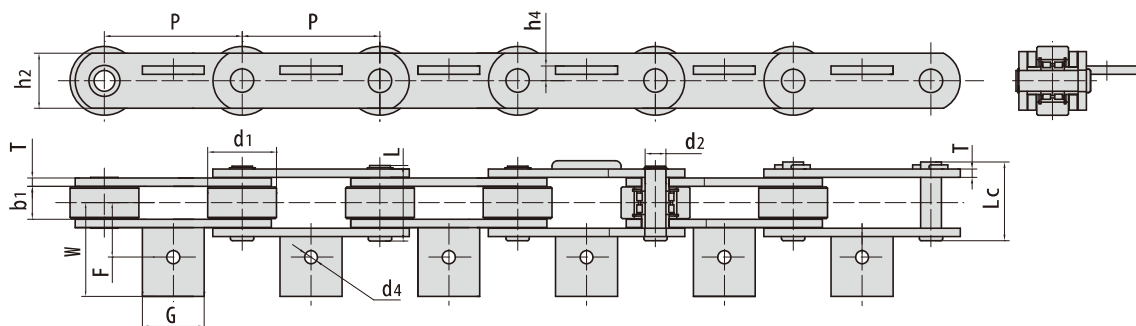

东华链号 Donghua Chain No.	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm
P 200F33	90.0	79.0	136.0	21.5	14.0

东华链号 Donghua Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
	P	d _{1 max}	b _{1 min}	d _{2 max}	L _{max}	L _{c max}	h _{2 max}	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 200F33	200.0	100.0	48.0	30.0	107.0	112.0	80.0	12.0	648/145670	680.0	37.8